





*** REDUCE LETTER SPACING 50%**
D4-3

COLORS: BACKGROUND - WHITE (REFL)
TEXT, BORDER AND SYMBOLS - GREEN (REFL)

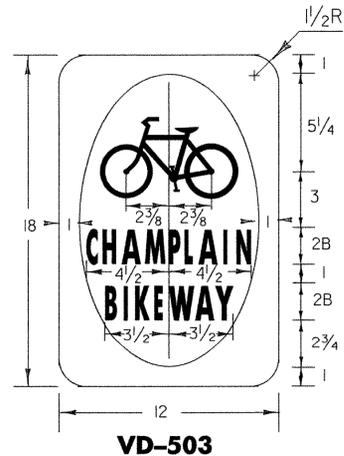


VD-503

COLORS:
LEGEND AND SYMBOL - WHITE (REFL)
INNER BACKGROUND - GREEN (REFL)
OUTER BACKGROUND - WHITE (REFL)

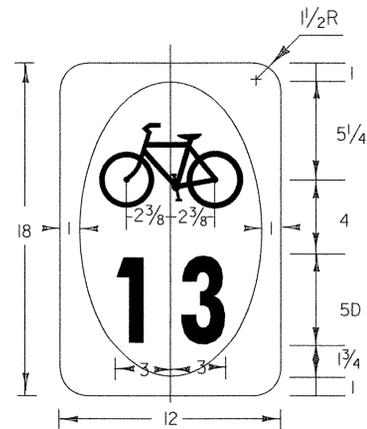


M1-8


COLORS:
LEGEND AND SYMBOL - WHITE (REFL)
INNER BACKGROUND - GREEN (REFL)
OUTER BACKGROUND - WHITE (REFL)

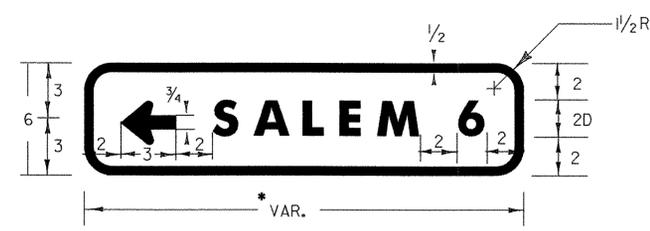


D1-1B (L)

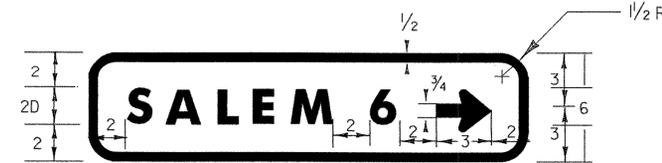


D1-1B (R)

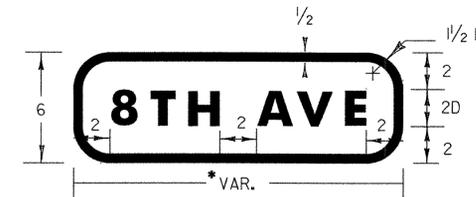


D1-1C
*** 24 INCH MAX.**

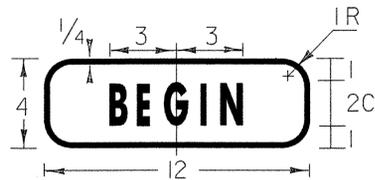

M4-11

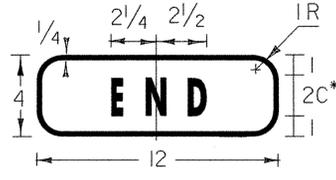

*** INCREASE LETTER SPACING 100%**
M4-12

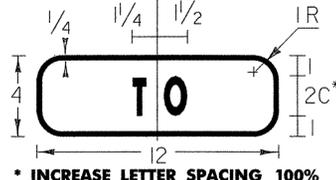


*** INCREASE LETTER SPACING 100%**
M4-13




D11-1


SIGN	DIMENSIONS (INCHES)									
	A	B	C	D	E	F	G	H	J	K
MIN & STD	24	18	1/2	1/2	7	3 1/2	3C	5/2	9 1/2	1/2

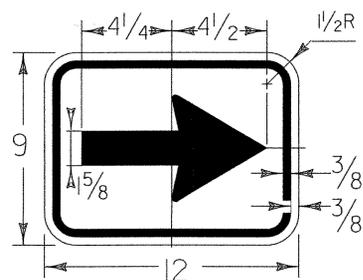


M7-1

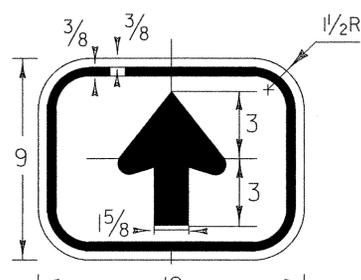


M7-2

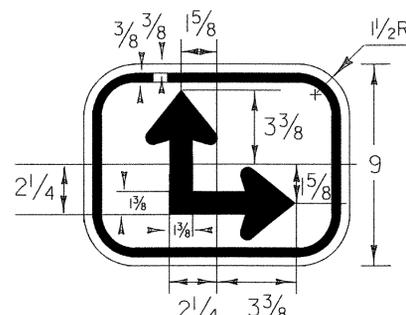


M7-6

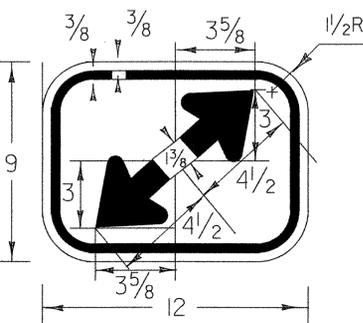


M7-3

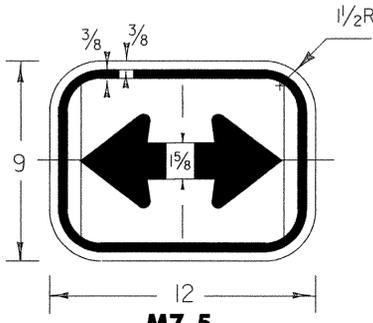

M7-5

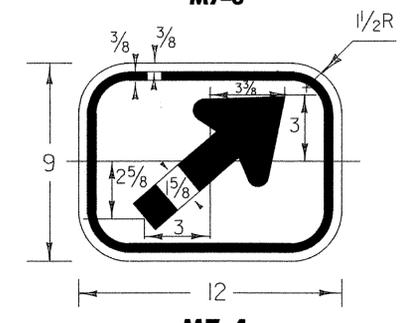

M7-4

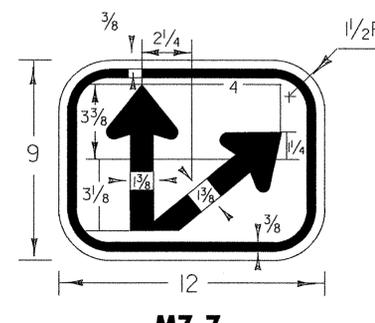

M7-7

GENERAL

SEE STANDARD E-144 FOR ARROWHEAD DETAILS. SEE FHWA STANDARD HIGHWAY SIGN BOOK FOR BIKE DETAIL. SUPPLEMENTAL PLAQUES SHALL BE USED ONLY IN COMBINATION WITH GUIDE SIGNS. THEY SHALL NOT BE MOUNTED ALONE OR DISPLAYED ALONE. IF USED, A SUPPLEMENTAL PLAQUE SHALL BE INSTALLED ON THE SAME POST(S) AS THE GUIDE SIGN.

COLORS

THE SIGNS SHOWN ON THIS SHEET SHALL HAVE REFLECTORIZED WHITE TEXT, SYMBOLS AND BORDER ON A REFLECTORIZED GREEN BACKGROUND UNLESS OTHERWISE NOTED. THE COLORS SHALL CONFORM WITH THE COLORS ADOPTED BY AASHTO AND APPROVED BY THE FHWA.

MATERIALS

THE SIGN BASE MATERIALS USED FOR GUIDE SIGNS SHOWN ON THIS SHEET MAY BE ANY OF THE FOLLOWING MINIMUM THICKNESSES NOTED:

12 X 4	24 X 6
12 X 9	24 X 18
12 X 18	

FLAT SHEET ALUMINUM 0.060"

HIGH DENSITY OVERLAID PLYWOOD 1/2"

0.080"

1/2"

THE REFLECTIVE MATERIAL SHALL BE ASTM TYPE III GREEN OR WHITE REFLECTIVE SHEETING APPLIED TO THE ENTIRE BACKGROUND OF THE SIGN. THE TEXT AND BORDER MAY BE LETTERING FILM OR SILK SCREENED.

SPECIFICATIONS

GUIDE SIGNS SHALL MEET THE VERMONT STANDARD SPECIFICATIONS FOR TRAFFIC SIGNS AS DESCRIBED IN THE VAOT STANDARD SPECIFICATIONS FOR CONSTRUCTION.

TEXT DESIGN

LETTERS, DIGITS, ARROWS, SPACING AND TEXT DIMENSIONS SHALL CONFORM TO THE LATEST VERSION OF FHWA'S 'STANDARD ALPHABETS FOR HIGHWAY SIGNS AND PAVEMENT MARKINGS'. DETAILS SHALL CONFORM WITH THOSE DESCRIBED IN THE PUBLICATION 'STANDARD HIGHWAY SIGNS' AS SPECIFIED IN THE MUTCD.

ALL DIMENSIONS ARE IN INCHES EXCEPT WHERE NOTED

OTHER STDS. REQUIRED:

E-144

REVISIONS AND CORRECTIONS
MAY 30, 2003 - DATE OF ORIGINAL ISSUE

APPROVED

[Signature]
DIRECTOR OF PROGRAM DEVELOPMENT
[Signature]
TRAFFIC OPERATIONS ENGINEER
[Signature]
FEDERAL HIGHWAY ADMINISTRATION

**BICYCLE GUIDE SIGN
DETAILS**



**STANDARD
E-131B**