


REVISIONS			
ZONE	REV	DESCRIPTION	APPROVED


NOTES FOR LAMINATED ELASTOMERIC BEARING PADS (ITEM NO. 531.12):

1. ALL STEEL BEARINGS SHALL BE AASHTO M270 GRADE 36.
2. ALL BEARING DEVICES SHALL BE METALIZED AS PER STANDARD SPECIFICATIONS 506.15, 531.04(b) AND 726.09 AS MODIFIED BY THE GENERAL SPECIAL PROVISIONS.
3. BEARINGS TO BE MANUFACTURED ACCORDING TO AASHTO LRFD STANDARD SPECIFICATIONS FOR HIGHWAY BRIDGES, SECTION 14 & 18, 17th. EDITION, 2002 AND 2010 INTERIMS.
4. ELASTOMERIC NATURAL RUBBER MATERIAL TO BE 50+/-5 DUREMETER HARDNESS, GR. 4
5. ALL STEEL PRODUCED IN THE U.S.A.
6. THE BEARINGS ARE DESIGNED SO THAT THE SUPERSTRUCTURE MAY BE ERECTED WHEN THE AMBIENT AIR TEMPERATURE IS WITHIN THE RANGE OF 40 DEG. F. TO 90 DEG. F.
7. ALL SWEDGED ANCHOR BOLTS F1554, GR. 36, HH NUTS A-563, AND WASHER PLATES A-36, SHALL BE GALVANIZED
8. PRIOR TO METALIZING, ALL CORNERS AND EDGES OF STEEL PLATES, SHAPES, ETC. SHALL BE GROUND TO A 1/16" MIN. RADIUS (TYP).

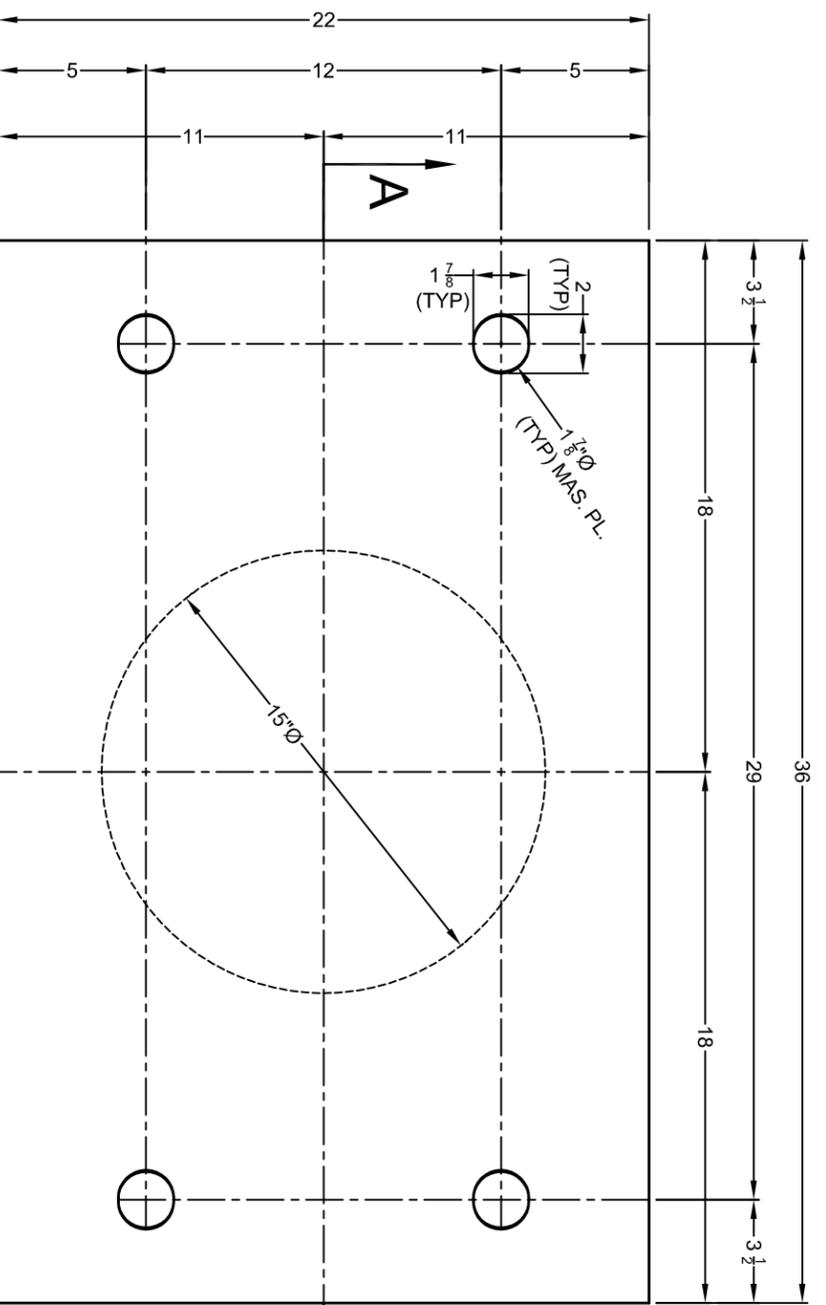


PLAN VIEW

QTY. REQ'D. = 2 ASSY.
MARKS G1 & G4 @ END BRIDGE

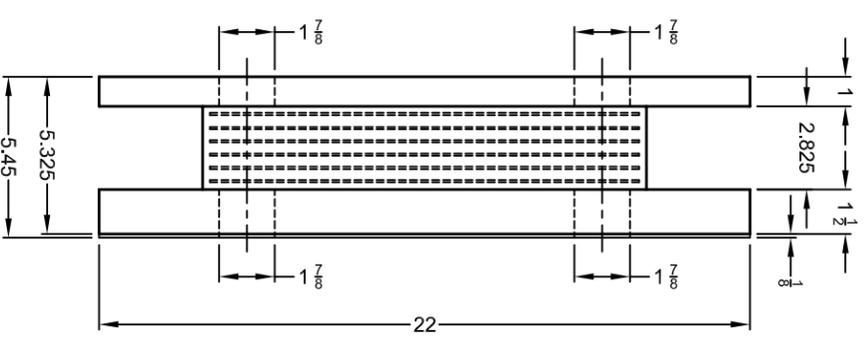

SIDE VIEW

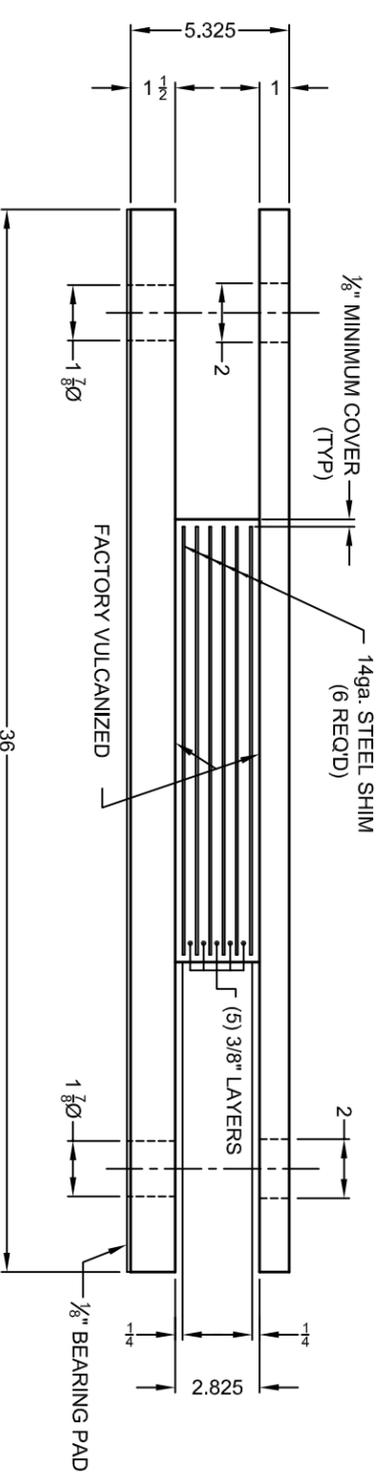

SECTION A-A

SEE SHEET 4 OF 4 FOR ANCHOR BOLT DETAILS

Inspection Block	Sign: _____	Date: _____
Initial Dim. Check	Sign: _____	Date: _____
In Process Dim. Chk.	Sign: _____	Date: _____
100% Visual Weld Insp.	Sign: _____	Date: _____
Paint Insp.(see form)	Sign: _____	Date: _____
Final Inspection	Sign: _____	Date: _____

VERMONT DOT
COLCHESTER

PROJECT NO. : STP 5600 (12)

CONTRACT NO. :

ELASTOMERIC FIXED BEARING
DETAILS

AMSCOT
STRUCTURAL PRODUCTS CORP.

SCALE: N.T.S. APPROV'D: _____ DRAWN BY: E.J.G.
DATE: 3/20/15 BF REVISION: 0

FOR: A.L. ST. ONGE

DWG NO: ASO15B1R0 SHEET 1 OF 4