

Highway Safety Corporation

Glastonbury, CT

Welding Procedure Specification

Material specification ASTM A36, A709 Gr 36, A500 gr B, A709 gr 50, A572 gr 50, A992

Welding process Gas Metal Arc Welding (GMAW) Spray Transfer

Manual, semi-automatic, or automatic Semi-Automatic

Position of welding Flat (1F) or Horizontal (2F)

Filler metal specification AWS A5.18

Filler metal classification ER70S-6

Electrode and manufacturer Lincoln Electric Lincoln Weld L-56

Flux and manufacturer N/A

Shielding gas 86% Argon / 14% CO2 Flow rate 35-45 CFM

Single or multiple pass Single or Multiple

Single or multiple arc Single

Welding current DCEP

Polarity Reverse - electrode positive

Welding progression Stringers

Root treatment clean base metal

Preheat and interpass temperature base metal up to 3/4" (50°F) ; over 3/4 thru 1-1/2" (150°F) : over 1-1/2" thru 2-1/2" (225°F)

Postheat treatment None

Electrode extension 3/4" ± 1/4"

WELDING PROCEDURE

Weld size	Pass no.	Electrode size	Welding parameters		Travel speed	Joint detail
			Amperes	Volts		
1/4"	1	0.062"	300 A ± 30	29 V ± 2	15 ipm ± 2	<p>TYPICAL ALL FILLET WELDS</p>

This procedure may vary due to fabrication sequence, fit-up, pass size, etc. within the limitation of variables given in section 5 of latest edition AWS D1.1 / D1.5

WPS no. W-1976

Revision no. 0

Supporting PQR no. Pre-Qualified

Project Name Enosburg, VT

Fabricator Highway Safety Corporation

Prepared By: Paul Radice

Date 3/6/14

Project Number BRO 1448 (40)

Highway Safety Corporation

Glastonbury, CT

Welding Procedure Specification

Material specification A572 gr 50, A709 Gr 50

Welding process Gas Metal Arc Welding (GMAW) Spray Transfer

Manual, semi-automatic, or automatic Semi-Automatic

Position of welding Flat (1F) or Horizontal (2F)

Filler metal specification AWS A5.18

Filler metal classification ER70S-6

Electrode and manufacturer Lincoln Electric Lincoln Weld L-56

Flux and manufacturer N/A

Shielding gas 86% Argon / 14% CO2 Flow rate 35-45 CFM

Single or multiple pass Single or Multiple

Single or multiple arc Single

Welding current DCEP

Polarity Reverse - electrode positive

Welding progression Stringers

Root treatment clean base metal

Preheat and interpass temperature base metal up to 3/4" (50°F) ; over 3/4 thru 1-1/2" (150°F) : over 1-1/2" thru 2-1/2" (225°F)

Postheat treatment None

Electrode extension 3/4" ± 1/4"

WELDING PROCEDURE

Weld size	Pass no.	Electrode size	Welding parameters		Travel speed	Joint detail
			Amperes	Volts		
5/16"	1	0.062"	300 A ± 30	29 V ± 2	15 ipm ± 2	
1/2"	1 & 2	0.062"	↓	↓	15 ipm ± 2	

This procedure may vary due to fabrication sequence, fit-up, pass size, etc. within the limitation of variables given in section 5 of latest edition AWS D1.5

WPS no. **W-VTPEDPOST2**

Revision no. **0**

Supporting PQR no. **Pre-Qualified**

Project Name **Enosburg, VT**

Fabricator **Highway Safety Corporation**

Prepared By: **Paul Radice**

Date **3/6/14**

Project Number **BRO 1448 (40)**

Highway Safety Corporation

Glastonbury, CT

Welding Procedure Specification

Material specification ASTM A500 gr B

Welding process Gas Metal Arc Welding (GMAW)

Manual, semi-automatic, or automatic Semi-Automatic

Position of welding Flat (1F) or Horizontal (2F)

Filler metal specification AWS A5.18

Filler metal classification ER70S-6

Electrode and manufacturer Lincoln Electric Lincoln Weld L-56

Flux and manufacturer N/A

Shielding gas 86% Argon / 14% CO2 Flow rate 35-45 CFM

Single or multiple pass Single

Single or multiple arc Single

Welding current DCEP

Polarity Reverse - electrode positive

Welding progression Stringers

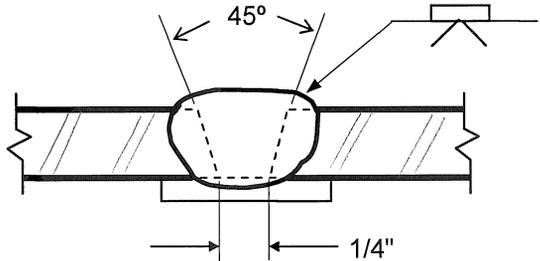
Root treatment clean base metal

Preheat and interpass temperature base metal up to 3/4" (50°F)

Postheat treatment None

Electrode extension 3/4" ± 1/4"

WELDING PROCEDURE

Weld size	Pass no.	Electrode size	Welding parameters		Travel speed	Joint detail
			Amperes	Volts		
	1	0.063"	300 A ± 30	29 V ± 2	15 ipm ± 2	B-U2a-GF 

This procedure may vary due to fabrication sequence, fit-up, pass size, etc. within the limitation of variables given in section 5 of latest edition AWS D1.1

WPS no. W-VGwBCK

Revision no. 0

Supporting PQR no. Pre-Qualified

Project Name Enosburg, VT

Fabricator Highway Safety Corporation

Prepared By: Paul Radice

Date 3/6/14

Project Number BRO 1448 (40)