



# Woodstock

## VT Route 106 Bridge 24

### Have questions?

Would you like to receive weekly updates?

Please contact Cindy Cook:  
Woodstockbridge@adamantaccord.com  
1 (802) 917-5005

### PROJECT MILESTONES

- Bid Advertisement
  - September 2015
- Construction
  - Start
    - April/May 2016
  - Est. Bridge closure Start
    - May 12, 2016
  - Est. Bridge Opening
    - June 6, 2016

### Woodstock BRF 0151(21) over Kedron Brook

**Project Location: Town of Woodstock in Windsor County on VT 106 over Kedron Brook. The bridge is located at mile marker 3.04 between intersections with Kendall Road and Bryant Road.**

The Woodstock VT 106 Bridge 24 project will replace the existing bridge, which is in deteriorated condition and does not meet current design standards for curb-to-curb widths and hydraulics. The existing bridge is a 29-foot long single span concrete T-beam structure constructed in 1924.

The new bridge will be a precast concrete frame supported on cantilever abutments located behind the existing abutments. The new bridge will be constructed with Accelerated Bridge Construction (ABC) methods on the existing alignment to minimize right-of-way, environmental, and utility impacts. The span of the bridge will be lengthened to approximately 45-feet to improve the hydraulic capacity of the structure. The replacement bridge will be 30 feet wide with two 11-foot travel lanes and 4-foot shoulders in each direction.

Local and through traffic along VT 106 will be impacted during construction and maintenance of traffic is a critical issue. VTrans evaluated alternatives for maintenance of traffic during construction in an engineering study completed in January 2013. The study considered construction duration and traffic, right-of-way, utility, and natural resource impacts. Two traffic maintenance options were considered, a short term bridge closure with an offsite detour, which would allow the new bridge to be constructed with ABC, and a temporary bridge. The engineering study recommended replacing the bridge with ABC with traffic maintained on an offsite detour during a 2 to 4 week short term road closure. This innovative approach will expedite construction through the use of precast elements, minimize impacts to adjacent wetlands, as well as minimize traffic disruptions while increasing the safety of the traveling public and construction workers.





**Target Construction Schedule:** The bridge will be replaced starting in April/May, 2016.

**Contractor:** Miller Construction, Inc.

**Low Bid:** \$1,999,264.00


**VTrans Project Manager:** Rob Young, P.E., Project Manager

**VTrans Resident Engineer:** Tom Chase

**Project Outreach Coordinator:** Cindy Cook

**Detour Route:** During the 21 day bridge closure period scheduled to begin on May 16, 2016, traffic will be rerouted onto detour.

**Detour:** This detour would reroute northbound VT 106 traffic east on VT 44, north on US 12, then west on US 4 to Woodstock.

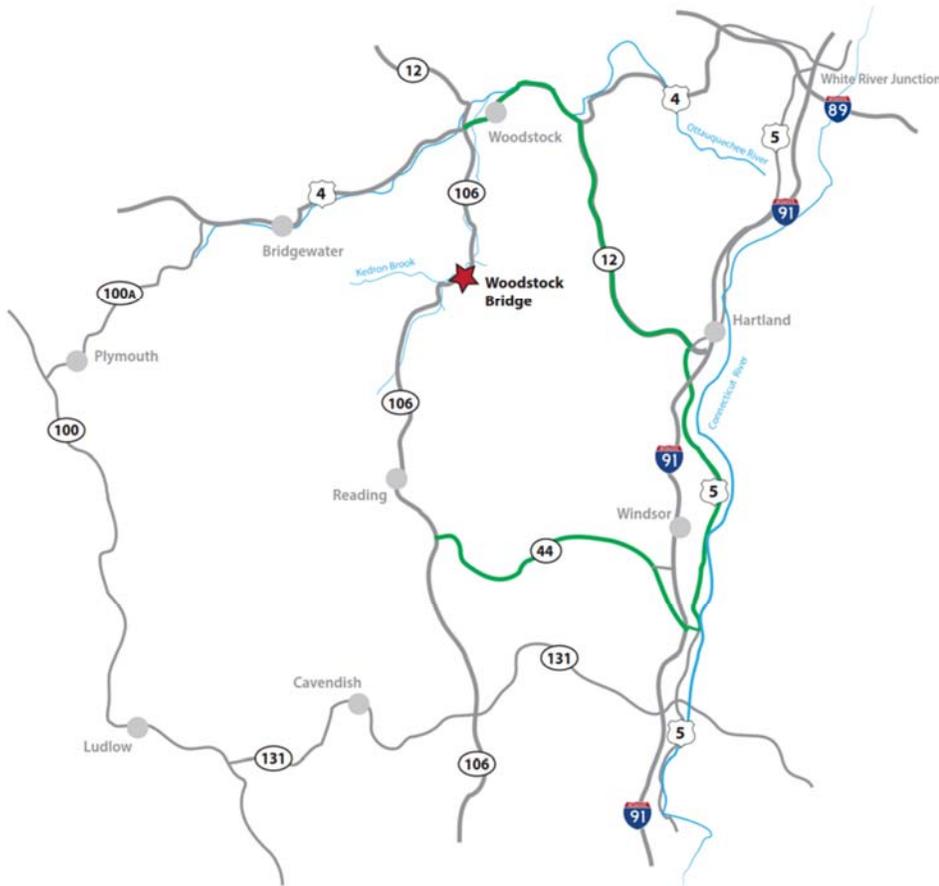

Regional Detour Map

*For more detailed information, [click here](#)*



*Deficient shoulder widths and poor condition of bridge rail.*



*Bridge rail with previously repaired section.*



<https://www.facebook.com>



<https://twitter.com/511VT>