IRISH SETTLEMENT ROAD TH. 46 BR. 28

CAMBRIDGE, VT

STATE OF VERMONT ROBERT J. [illegible] REGISTERED PROFESSIONAL ENGINEER

LIFTING LOOP DESIGN CALCULATIONS

28D NEXT BEAMS $W/T_{BEAM} = 83.2^K$, MAX.

THERE ARE (4) LIFT LOOPS WITH (2) AT EA. END OF BEAM

LOAD / LIFT LOCATION $= 83.2/4 = 20.8^K$

ASSUME 60° MIN. SLING ANGLE WITH HORIZONTAL FOR HOISTING.

DESIGN LOAD / LIFT LOCATION $= 20.8^K / 0.866 = 24.0^K$

FROM ATTACHED PCI LITERATURE (SECTION 5.2.8) @ EA. LIFT POINT

USE (4) 0.600"ϕ 270 KSI STRAND LIFT LOOPS, MIN. EMBED 26"

SWL (4:1 SF) $= 1.1 \times 26^K = 28.6^K > 24.0^K$ O.K. ✓

ALSO CHECK USING PCI FIG 6.15.7A, ATTACHED

$$\phi P_c = \phi\, 2.67 \lambda \sqrt{f'_{ci}}\,(x_1)(y_1 + 2l_e)$$

$$= (0.85)(2.67)(1.0)(6000)^{0.5}\left(\frac{13.75+15}{2}\right)(2 \times 26")$$

$$= 131.4^K$$

FOR 4:1 SF

$$SWL = 131.4^K/4 = 32.9^K > 24.0^K \quad \text{OK} ✓$$

TOPS

2/3

Fig. 5.2.10 Arrangement for equalizing lifting loads

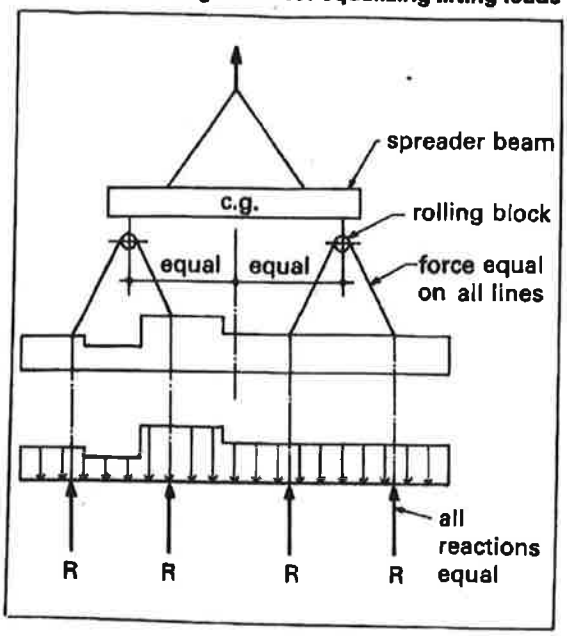

lines equal. The member can then be analyzed as a beam with varying load supported by equal reactions.

The force in inclined lift lines can be determined from Fig. 5.2.7.

5.2.8 Handling devices

The most common lifting devices are prestressing strand or cable loops projecting from the concrete, threaded inserts, or special proprietary devices.

Since lifting devices are subject to dynamic loads, ductility of the material is part of the design requirement. Deformed reinforcing bars should not be used since the deformations result in stress concentrations from the shackle pin. Also, reinforcing bars are often hard-grade or re-rolled rail steel with little ductility and low impact strength at cold temperatures. Smooth bars of a known steel grade may be used if adequate embedment or mechanical anchorage is provided. The diameter must be such that localized failure will not occur by bearing on the shackle pin.

Prestressing strand is often used for lifting loops. The variables involved make it almost impossible to calculate a capacity which can be used for all situations. Generally, producers will establish standard criteria for use in handling the standard products manufactured by that plant. Table 5.2.3 is an example which has been used successfully.

Reduced capacities for shorter embedment lengths may be suitable. In shallow products, providing a 90° bend can reduce the required embedment length significantly. Lightly rusted strand has better bond than bright strand.

The diameter of the bend of the loop should be at least 4 in. For smaller diameters, the loop capacities in Table 5.2.3 should be reduced to:

1 in. dia. — 70 %
2 in. dia. — 85 %
3 in. dia. — 90 %

The angle of incline of lifting has little effect on the strand lifting loop capacity if the angle from the horizontal is more than about 20°. Typical handling methods are usually such that this angle is no less than 60°.

Table 5.2.3 Capacity of ½ in. diameter, 270 ksi strands used as lifting loops

Lifting angle	Embedment length (in.)	Single loop (kips)	Double loop (kips)	Triple loop (kips)
45 degrees 	16	5	8.5	11.5
	22	8	13	17.5
	28	10	18	23
	34	11	23	29
Vertical 	16	7.5	12.5	16.5
	22	11.5	19	24.5
	28	15.5	25.5	33
	34	16	32.5	41

1. These values are limited by slippage rather than strand strength, with a factor of safety of 4. For other strand diameters, multiply table values by 0.75 for ⅜ in. diameter, 0.85 for 7/16 in. diameter, and 1.1 for 0.6 in. diameter.
2. Minimum f'_c = 3000 psi.
3. Multiple strand loops must be fabricated to ensure equal force on each strand.

Figure 6.15.7A (continued) Design tensile strength for $h \geq h_{min}$, ϕP_{c1}—Case 3



x and y are the overall dimensions (width and length) of the stud group.

Case 3: Free edges on two opposite sides

$$\phi P_{c1} = \phi 2.67 \lambda \sqrt{f'_c}\,(x_1)(y_1 + 2\ell_e)$$

$$\phi = 0.85$$

where: x_1 and y_1 are the dimensions of the flat bottom of the part of the truncated pyramid.

For Case 3: $x_1 = x + d_{e1} + d_{e2}$ $\quad y_1 = y$

Note: Table values are based on $\lambda = 1.0$ and $f'_c = 5000$ psi; for different material properties, multiply table values by $\lambda\sqrt{f'_c/5000}$

ℓ_e in.	y_1, in. \ x_1, in.	Design tensile strength, ϕP_{c1} (kips)														
		2	4	6	8	10	12	14	16	18	20	22	24	26	28	30
3	0	2	4	6	8	9	11	13	15	17	19	21	23	25	27	29
	2	3	5	8	10	13	15	18	21	23	25	28	31	33	36	39
	4	3	7	9	13	16	19	23	25	29	32	35	39	42	45	48
	6	4	8	11	15	19	23	27	31	35	39	42	46	50	54	58
	8	5	9	13	18	23	27	31	36	41	45	49	54	59	63	67
	10	5	10	15	21	25	31	36	41	46	51	57	61	67	72	77
	12	6	11	17	23	29	35	41	46	52	58	63	69	75	81	87
	14	7	13	19	25	32	39	45	51	58	64	71	77	83	90	96
	16	7	14	21	28	35	42	49	57	63	71	77	85	92	99	106
4	0	3	5	8	10	13	15	18	21	23	25	28	31	33	36	39
	2	3	7	9	13	16	19	23	25	29	32	35	39	42	45	48
	4	4	8	11	15	19	23	27	31	35	39	42	46	50	54	58
	6	5	9	13	18	23	27	31	36	41	45	49	54	59	63	67
	8	5	10	15	21	25	31	36	41	46	51	57	61	67	72	77
	10	6	11	17	23	29	35	41	46	52	58	63	69	75	81	87
	12	7	13	19	25	32	39	45	51	58	64	71	77	83	90	96
	14	7	14	21	28	35	42	49	57	63	71	77	85	92	99	106
	16	8	15	23	31	39	46	54	61	69	77	85	92	100	108	115
6	0	4	8	11	15	19	23	27	31	35	39	42	46	50	54	58
	2	5	9	13	18	23	27	31	36	41	45	49	54	59	63	67
	4	5	10	15	21	25	31	36	41	46	51	57	61	67	72	77
	6	6	11	17	23	29	35	41	46	52	58	63	69	75	81	87
	8	7	13	19	25	32	39	45	51	58	64	71	77	83	90	96
	10	7	14	21	28	35	42	49	57	63	71	77	85	92	99	106
	12	8	15	23	31	39	46	54	61	69	77	85	92	100	108	115
	14	9	17	25	33	42	50	59	67	75	83	92	100	109	117	125
	16	9	18	27	36	45	54	63	72	81	90	99	108	117	125	135
8	0	5	10	15	21	25	31	36	41	46	51	57	61	67	72	77
	2	6	11	17	23	29	35	41	46	52	58	63	69	75	81	87
	4	7	13	19	25	32	39	45	51	58	64	71	77	83	90	96
	6	7	14	21	28	35	42	49	57	63	71	77	85	92	99	106
	8	8	15	23	31	39	46	54	61	69	77	85	92	100	108	115
	10	9	17	25	33	42	50	59	67	75	83	92	100	109	117	125
	12	9	18	27	36	45	54	63	72	81	90	99	108	117	125	135
	14	9	19	29	39	48	58	67	77	87	96	106	115	125	135	144
	16	10	21	31	41	51	61	72	82	92	103	113	123	133	143	154