

KUBRICKY CONSTRUCTION CORP.
269 BALLARD ROAD

WILTON, NY 12831
518 792-5864



KUBRICKY CONSTRUCTION CORP.
A PROUD MEMBER OF THE D.A. COLLINSSM COMPANIES
An Equal Opportunity Employer

Rutland City BRF 3000 (2014036)
SUBMITTAL 40

Issued 03/20/15
Respond by 04/03/15

To

Timothy Pockette, PE

Topic	629.39 Corporation Stop 2"
Status	For Approval
Spec section	629.39
Responsibility	(16) River St
Sent to approver	3/20/15
Required from approver	4/3/15

From


Volker H.D. Burkowski

Signed by 

Date 3/20/15

Proceed as Indicated _____
Owner Authorized Representative


Date _____

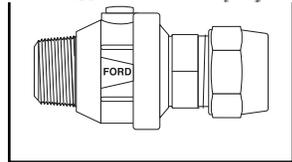

SUBMITTAL INFORMATION

Ballcorp Corporation Stops - (FB1000-x-G-NL style)

AWWA/CC TAPER THREAD INLET BY GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

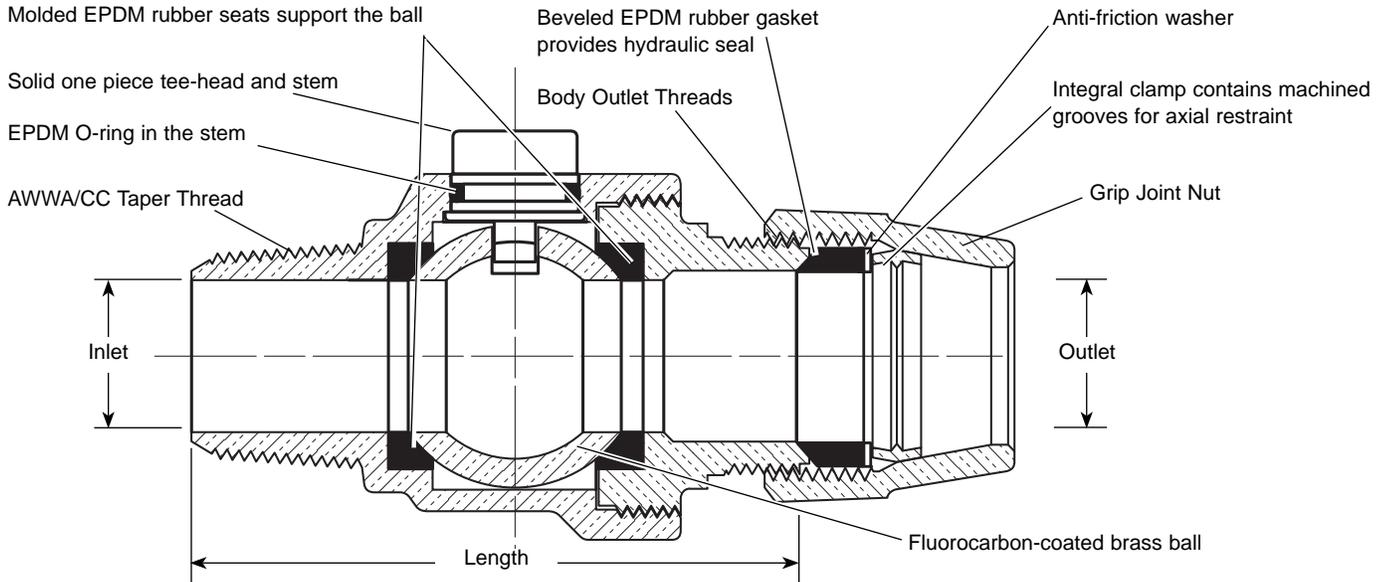

VALVE SIZE	INLET SIZE	OUTLET SIZE	VALVE LENGTH	BODY OUTLET THREADS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
1-1/4"	1-1/4"	1-1/4"	5-15/16"	1-1/4" Flare Copper	4.9	FB1000-5-G-NL	
1-1/4"	1-1/4"	1-1/2"	5-7/8"	1-1/2" Flare Copper	5.7	FB1000-56-G-NL	
1-1/2"	1-1/2"	1-1/2"	6-9/16"	1-1/2" Flare Copper	6.9	FB1000-6-G-NL	
1-1/2"	1-1/2"	2"	6-9/16"	2" Flare Copper	8.5	FB1000-67-G-NL	
2"	2"	2"	7-7/16"	2" Flare Copper	11.1	FB1000-7-G-NL	
2"	2"	2-1/2"	7-9/16"	2-1/2" Flare Copper	10.9	FB1000-78-G-NL	



Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

- ### FEATURES
- All brass that comes in contact with potable water conforms to AWWA standard C800 (UNS NO C89833)
 - Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
 - The product has the letters "NL" cast into the main body for proper identification
 - UL Classified to ANSI/NSF Standard 61 and Annex G
 - Ends are integral or secured with adhesive to prevent unintentional disassembly
 - 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

FORD **The Ford Meter Box Company, Inc.**
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

Submitted By: _____



MODEL 3417DI DUCTILE IRON SADDLE WITH STRAPS

BODY CASTING: Ductile Iron per ASTM A536.

STRAPS: Type 304 (18-8) Stainless Steel per ASTM A240.

STUD BOLTS: Type 304 (18-8) Stainless Steel per ASTM A193.

NUTS: Type 304 (18-8) Stainless Steel per ASTM A194. NOTE: Hex nuts are furnished with fusion bonded coating to prevent seizing and galling.

GASKET: Patented SBR TwinSeal® dual o-ring design incorporating both hydrostatic and mechanical forces to affect a dynamic seal.

FINISH: Epoxy.

Pipe Size		Pipe OD Range		Single Strap	Double Strap	
in.	mm.		in.	mm.		
2	50	A	2.38-2.50	61-64	Epoxy 3/4, 1 CC or NPT	Epoxy 1 1/4, 1 1/2, 2 CC or NPT
3	80	A	3.50	89	\$67.20	\$85.20*
		B	3.45-4.05	88-103	\$67.30	\$77.50**
4	100	A	4.00-4.50	102-114	\$67.30	\$77.50**
		B	4.74-5.63	120-143	\$67.80	N/A
		C	4.74-5.14	120-131	\$68.40	\$77.50
6	150	A	6.00-6.63	152-168	\$76.20	\$86.00
		B	6.84-7.64	174-194	\$76.20	\$86.00
8	200	A	8.00-8.63	203-219	\$92.50	\$106.40
		B	8.45-10.10**	216-257	\$95.80	\$106.40
10	250	A	10.00-11.10	254-282	\$112.40	\$128.50
		B	10.64-12.12	270-308	\$112.40	\$128.50
12	300	A	12.00-13.20	305-335	\$130.30	\$149.10
		B	12.62-14.32	321-364	\$130.30	\$149.10
12-14	300-350	A	14.73-15.65	374-398	\$156.00	\$157.80
16-18	400-450	A	17.40-18.88	442-480	\$158.90	\$178.30
18	450	A	19.50	495	\$244.30	\$258.90
20	500	A	21.60	549	\$273.60	\$290.10
24	600	A	25.80	655	\$321.80	\$341.10

*Not Available in 1 1/2 CC or 2 NPT

**Not Available in 2 NPT

••Not to be used on IPS PVC

Standard epoxy coating applied 3-5 mills, heavier applications available. Please consult factory representatives for pricing.

HOW TO ORDER: Choose nominal pipe size x outlet size and thread configuration. EXAMPLE: 4" Ductile Iron O.D. 4.80 with 3/4 CC outlet. Order 3417 - 4B x 3/4 CC Epoxy.

NOTE: Please advise when saddles are being ordered for use on C900 pipe.

Manufacturer Suggestion: For PVC pipe applications, order saddle which has OD of pipe at the top of the range.