


**SUBMITTAL INFORMATION**

**Ballcorp Corporation Stops - (FB1000-x-G-NL style)**

**AWWA/CC TAPER THREAD INLET BY GRIP JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET**

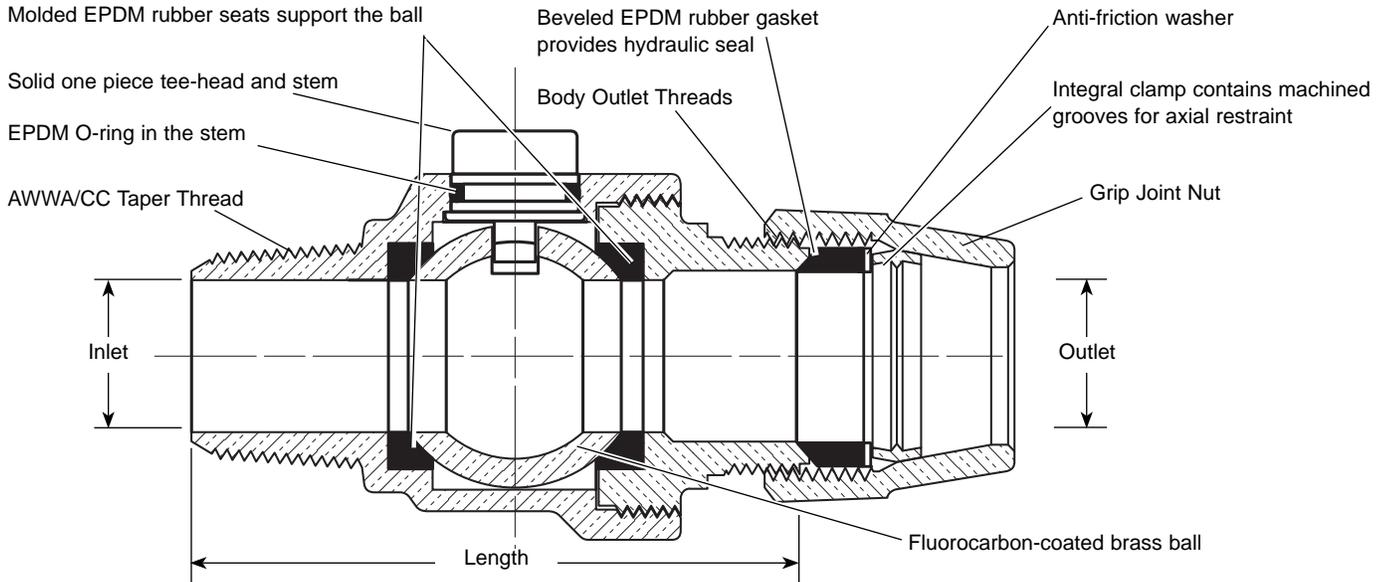

VALVE SIZE	INLET SIZE	OUTLET SIZE	VALVE LENGTH	BODY OUTLET THREADS	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
1-1/4"	1-1/4"	1-1/4"	5-15/16"	1-1/4" Flare Copper	4.9	FB1000-5-G-NL	
1-1/4"	1-1/4"	1-1/2"	5-7/8"	1-1/2" Flare Copper	5.7	FB1000-56-G-NL	
1-1/2"	1-1/2"	1-1/2"	6-9/16"	1-1/2" Flare Copper	6.9	FB1000-6-G-NL	
1-1/2"	1-1/2"	2"	6-9/16"	2" Flare Copper	8.5	FB1000-67-G-NL	
2"	2"	2"	7-7/16"	2" Flare Copper	11.1	FB1000-7-G-NL	
2"	2"	2-1/2"	7-9/16"	2-1/2" Flare Copper	10.9	FB1000-78-G-NL	



**Note:** Ford recommends using insert stiffeners with plastic pipe or tubing.

- FEATURES**
- All brass that comes in contact with potable water conforms to AWWA standard C800 (UNS NO C89833)
  - Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
  - The product has the letters "NL" cast into the main body for proper identification
  - UL Classified to ANSI/NSF Standard 61 and Annex G
  - Ends are integral or secured with adhesive to prevent unintentional disassembly
  - 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product

Vermont Agency of Transportation

RECEIVED

CK'D BY MEM OK'D BY CWC

Mar. 20, 2015

RESUBMIT APPROVED ✓  
BY C. Carlson DATE 04-30-2015

**FORD**  
**The Ford Meter Box Company, Inc.**  
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443  
 Phone: 260-563-3171 / Fax: 800-826-3487  
 Overseas Fax: 260-563-0167  
 http://www.fordmeterbox.com

Submitted E

08/24/10

MULTIPLIER  
 [ ]

NSF



## MODEL 3417DI DUCTILE IRON SADDLE WITH STRAPS

**BODY CASTING:** Ductile Iron per ASTM A536.

**STRAPS:** Type 304 (18-8) Stainless Steel per ASTM A240.

**STUD BOLTS:** Type 304 (18-8) Stainless Steel per ASTM A193.

**NUTS:** Type 304 (18-8) Stainless Steel per ASTM A194. NOTE: Hex nuts are furnished with fusion bonded coating to prevent seizing and galling.

**GASKET:** Patented SBR TwinSeal® dual o-ring design incorporating both hydrostatic and mechanical forces to affect a dynamic seal.

**FINISH:** Epoxy.

Pipe Size			Pipe OD Range		Single Strap	Double Strap
in.	mm.		in.	mm.	Epoxy 3/4, 1 CC or NPT	Epoxy 1 1/4, 1 1/2, 2 CC or NPT
2	50	A	2.38-2.50	61-64	\$67.20	\$85.20*
3	80	A	3.50	89	\$67.30	\$77.50**
		B	3.45-4.05	88-103	\$67.30	\$77.50**
4	100	A	4.00-4.50	102-114	\$67.80	\$77.50
		B	4.74-5.63	120-143	\$68.40	N/A
		C	4.74-5.14	120-131	N/A	\$77.50
6	150	A	6.00-6.63	152-168	\$76.20	\$86.00
		B	6.84-7.64	174-194	\$76.20	\$86.00
8	200	A	8.00-8.63	203-219	\$92.50	\$106.40
		B	8.45-10.10**	216-257	\$95.80	\$106.40
10	250	A	10.00-11.10	254-282	\$112.40	\$128.50
		B	10.64-12.12	270-308	\$112.40	\$128.50
12	300	A	12.00-13.20	305-335	\$130.30	\$149.10
		B	12.62-14.32	321-364	\$130.30	\$149.10
12-14	300-350	A	14.73-15.65	374-398	\$156.00	\$157.80
16-18	400-450	A	17.40-18.88	442-480	\$158.90	\$178.30
18	450	A	19.50	495	\$244.30	\$258.90
20	500	A	21.60	549	\$273.60	\$290.10
24	600	A	25.80	655	\$321.80	\$341.10

\*Not Available in 1 1/2 CC or 2 NPT

\*\*Not Available in 2 NPT

•• Not to be used on IPS PVC

Vermont Agency of Transportation

**RECEIVED**

CK'D BY MEM OK'D BY CWC

Mar. 20, 2015

Standard epoxy coating applied 3-5 mills, heavier applications available. Please consult factory repr

HOW TO ORDER: Choose nominal pipe size x outlet size and thread configuration. EXAMPLE: 4" Ductile Iron O

NOTE: Please advise when saddles are being ordered for use on C900 pipe.

Manufacturer Suggestion: For PVC pipe applications, order saddle which has OD of pipe at the top of the range

RESUBMIT  
BY C. Carlson

APPROVED ✓

DATE 04-30-2015