
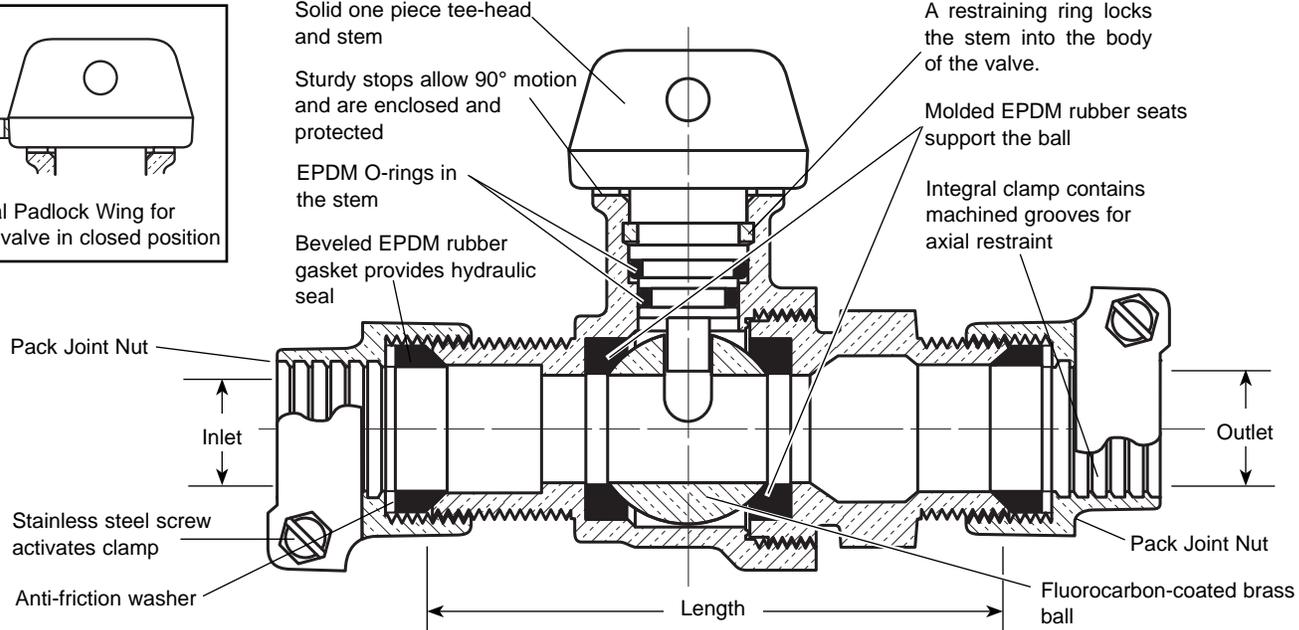


SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B44-xxx-NL style)

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET



| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|---------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-15/16" | 2.4 | B44-333-NL | |
| 3/4" | 1" | 3/4" | 4-3/16" | 2.5 | B44-343-NL | |
| 3/4" | 1" | 1" | 4-3/16" | 2.7 | * B44-344W-NL | |
| 1" | 1" | 1" | 4-13/16" | 3.2 | B44-444-NL | |
| 1" | 1-1/4" | 1-1/4" | 5-7/8" | 5.0 | B44-455-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 6-3/8" | 6.4 | B44-555-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 7" | 9.1 | B44-666-NL | |
| 1-1/2" | 2" | 2" | 8-1/4" | 11.1 | B44-677-NL | |
| 2" | 2" | 2" | 7-1/4" | 13.8 | B44-777-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.
*Available with Padlock Wing only.



FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction.
- Ends are integral or secured with adhesive to prevent unintentional disassembly.
- Hole for attaching curb box rod or handle is provided in tee-head.
- 300 PSI working pressure.
- The product has the letters "NL" cast into the main body for proper identification.
- UL Classified to ANSI/NSF Standard 61.

Optional Padlock Wing for locking valve in closed position. Insert "W" into part number.
Optional Full 360° tee-head rotation. Insert "R" into part number.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

FORD
The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

Submitted By: _____



SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B11-xxx-NL style)

FEMALE IRON PIPE THREAD INLET BY FEMALE IRON PIPE THREAD OUTLET

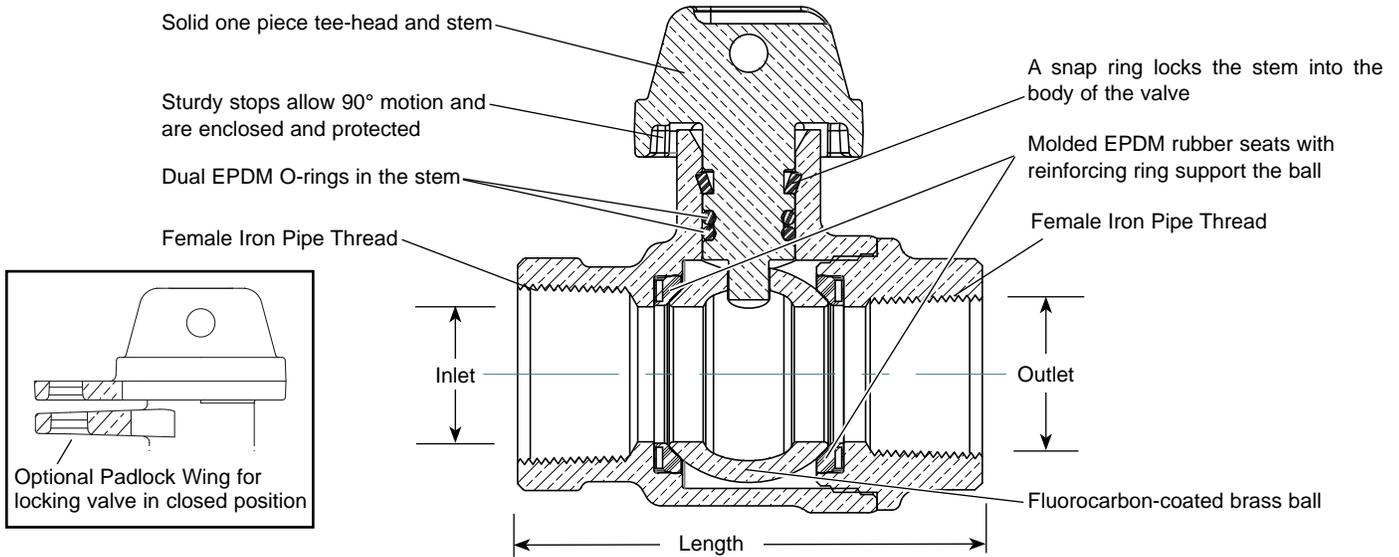


Image shown above is a B11-444-NL

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-1/64" | 1.5 | B11-333-NL | |
| 3/4" | 1" | 3/4" | 3-17/64" | 1.6 | B11-343-NL | |
| 3/4" | 1" | 1" | 2-15/32" | 1.6 | B11-344-NL | |
| 1" | 1" | 1" | 3-7/16" | 2.0 | B11-444-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 4-1/64" | 4.2 | B11-555-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 4-15/32" | 4.8 | B11-666-NL | |
| 2" | 2" | 2" | 5-1/4" | 7.2 | B11-777-NL | |
| 2" | 2-1/2" | 2-1/2" | 6-3/64" | 11.1 | B11-788-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Hole for attaching curb box rod or handle is provided in tee-head
- 300 PSI working pressure

Optional Padlock Wing for locking valve in closed position. Add "W" to part number
Optional full 360° tee-head rotation. Add "R" to part number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

09/11/14

Submitted By:

Blank space for signature or name.

Eclipse Boxes

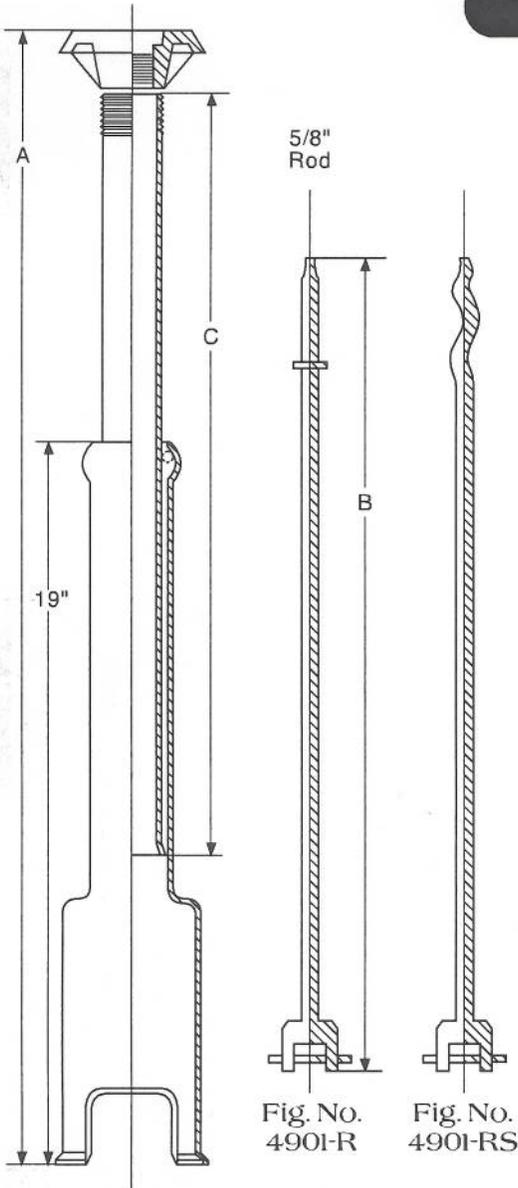


Fig. No. E-100 & E-125


Fig. No. 4901-R

Fig. No. 4901-RS

Fig. No. E-100 & E-125 Eclipse Boxes Complete

- "Eclipse" Arched Pattern Curb Boxes in two steel pipe shaft sizes: 1" (Fig. No. E-100) 1 1/4" (Fig. No. E-125) for curb stops 1/2"-1 1/4".
- Steel Pipe Shaft available in 1" or 1 1/4" is adjustable up and down and held in place by a brass ring.
- Bottom is cast iron. It is belled and arched to fit curb stops.
- The permanent steel rod is forged at the top end to receive a short cut-off wrench. The rod is welded to the cut-off key at the bottom. A connecting pin is provided to attach the key to the valve tee. A centering ring is placed on the rod to keep rod centered in the top pipe section. Fig. No. 4901-RS also available.
- Lids are cast iron in two separate designs:
Type A — Cast iron with water works head and pentagon brass plug.
Type B — Cast iron with two 1/2" holes for operating with a straddle wrench. Has brass bushing with standard pipe thread to attach to pipe section.
- Complete curb box consists of lid, top pipe, cast iron bottom, and rod assembly (rod, ring and pin).
- All "Eclipse" Boxes have 12" range of extension
- 5/8" Steel Rod. 1" and 1 1/4" Steel Pipe.

When Ordering Specify: Fig. No. – Size No. – Cover marked GAS or WATER or Special Lettering at Extra Cost.

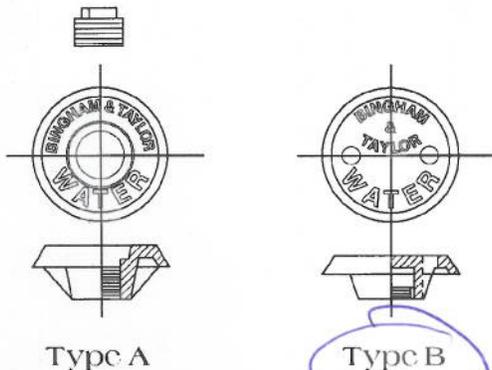

Type A

Type B

| Size Dim. A | Rod Dim. B | Pipe Dim. C | Weight |
|-------------|------------|-------------|--------|
| 1.5-2.5 | 16.75 | 11 | 15.0 |
| 2.0-3.0 | 21.00 | 17 | 16.0 |
| 2.5-3.5 | 27.00 | 23 | 16.5 |
| 3.0-4.0 | 33.00 | 29 | 17.0 |
| 3.5-4.5 | 39.00 | 35 | 18.0 |
| 4.0-5.0 | 45.00 | 41 | 19.0 |
| 4.5-5.5 | 51.00 | 47 | 20.0 |
| 5.0-6.0 | 57.00 | 53 | 21.0 |
| 5.5-6.5 | 63.00 | 59 | 22.0 |
| 6.0-7.0 | 69.00 | 65 | 23.0 |
| 6.5-7.5 | 75.00 | 71 | 24.0 |
| 7.0-8.0 | 81.00 | 77 | 25.0 |

| Size Dim. A | Rod Dim. B | Pipe Dim. C | Weight |
|-------------|------------|-------------|--------|
| 1.5-2.5 | 16.75 | 13 | 15.0 |
| 2.0-3.0 | 21.00 | 19 | 16.0 |
| 2.5-3.5 | 27.00 | 25 | 16.5 |
| 3.0-4.0 | 33.00 | 33 | 17.0 |
| 3.5-4.5 | 39.00 | 37 | 18.0 |
| 4.0-5.0 | 45.00 | 43 | 19.0 |
| 4.5-5.5 | 51.00 | 49 | 20.0 |
| 5.0-6.0 | 57.00 | 55 | 21.0 |
| 5.5-6.5 | 63.00 | 61 | 22.0 |
| 6.0-7.0 | 69.00 | 67 | 23.0 |
| 6.5-7.5 | 75.00 | 73 | 24.0 |
| 7.0-8.0 | 81.00 | 79 | 25.0 |


w/ 30" SS ROD



SUBMITTAL INFORMATION

Curb Box Base - (CB-7 style)

BASE TO ADAPT ARCH BASE CURB BOXES TO CURB STOPS LARGER THAN 1"

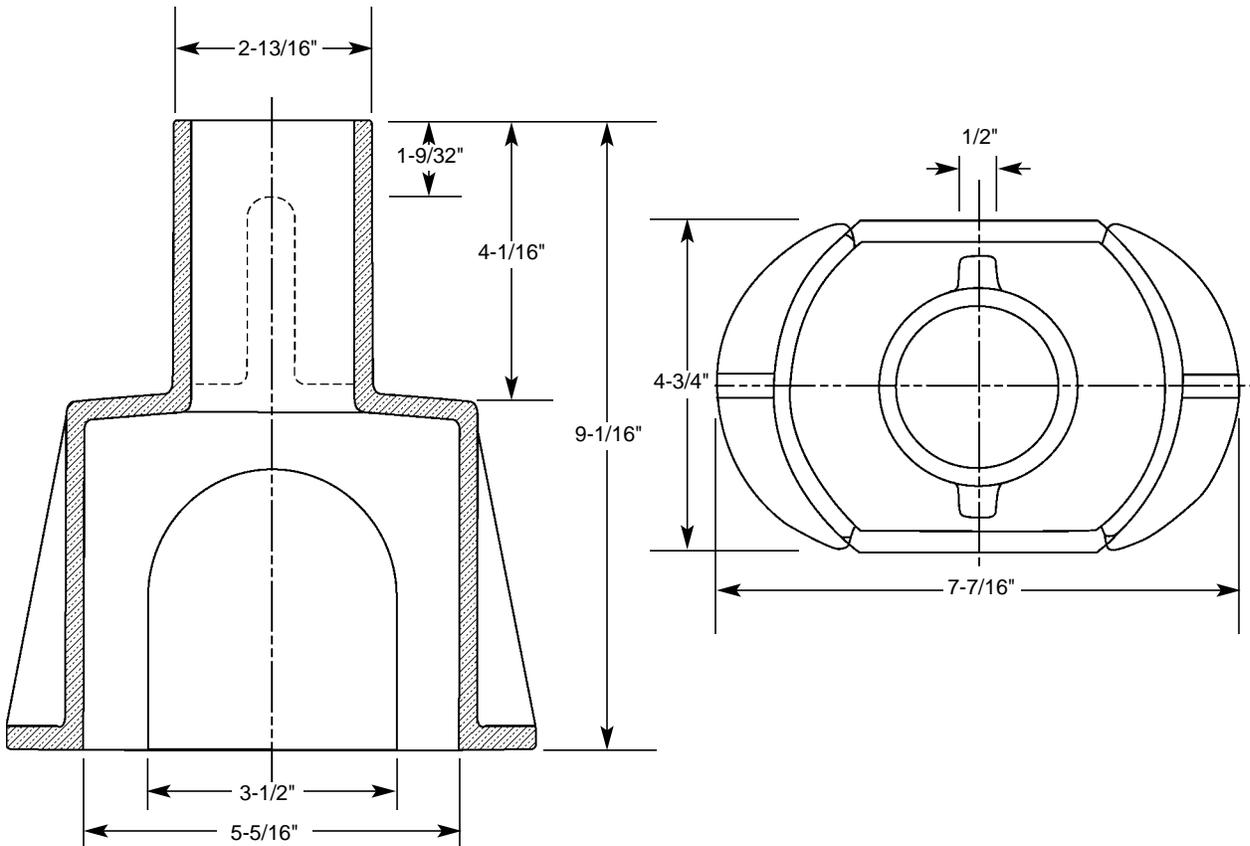

| APPROX. Wt. LBS. | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|----------------|---------------------|
| 8 | CB-7 | |

FEATURES

- Made of Cast Iron ASTM A48, Class 25
- Painted Black Asphalt.
- Fits over 1-1/4", 1-1/2" and 2" Ball Valve Curb Stops.
- Inserts into any Ford Arch Base Curb Box having 2-7/8" or larger I.D. at bottom.
- Increases overall height of curb box by 5".

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443

Phone: 260-563-3171 / Fax: 800-826-3487

Overseas Fax: 260-563-0167

<http://www.fordmeterbox.com>

04/30/02

Submitted By: