
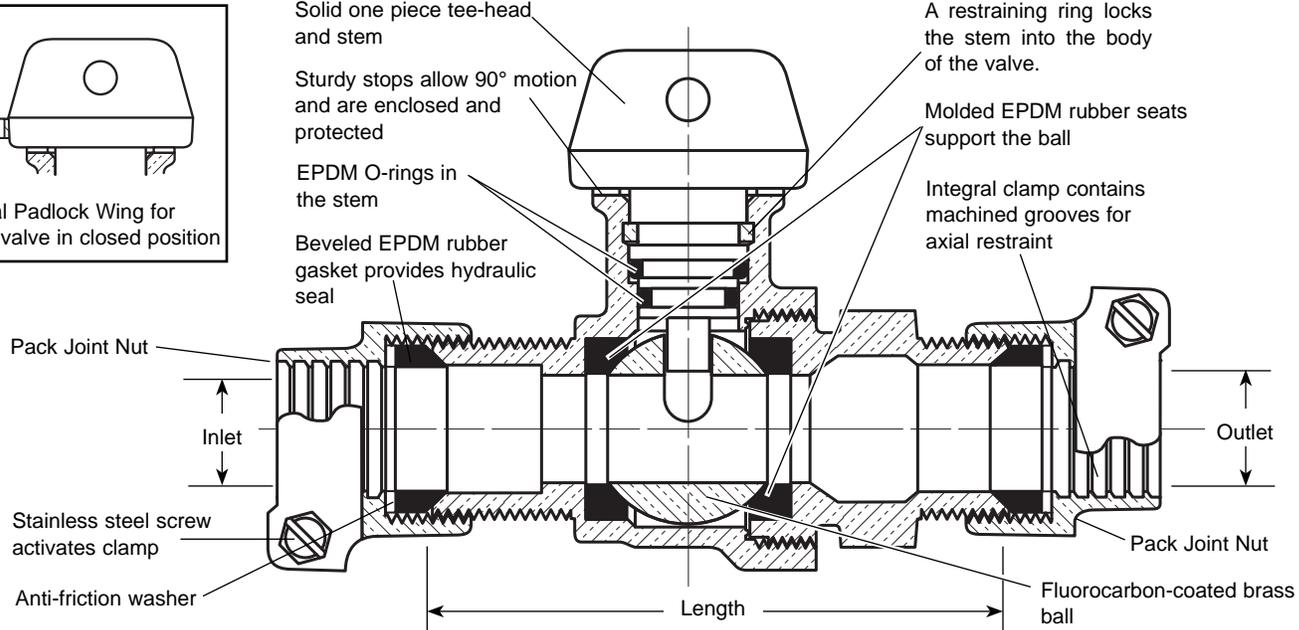


SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B44-xxx-NL style)

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

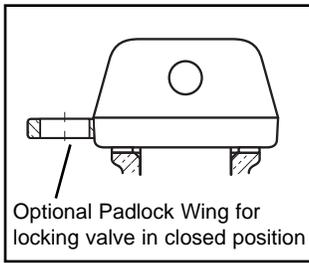

VALVE SIZE	INLET SIZE	OUTLET SIZE	LENGTH	APPROX. WT. LBS	PART NUMBER	✓ SUBMITTED ITEM(S)
3/4"	3/4"	3/4"	3-15/16"	2.4	B44-333-NL	
3/4"	1"	3/4"	4-3/16"	2.5	B44-343-NL	
3/4"	1"	1"	4-3/16"	2.7	* B44-344W-NL	
1"	1"	1"	4-13/16"	3.2	B44-444-NL	
1"	1-1/4"	1-1/4"	5-7/8"	5.0	B44-455-NL	
1-1/4"	1-1/4"	1-1/4"	6-3/8"	6.4	B44-555-NL	
1-1/2"	1-1/2"	1-1/2"	7"	9.1	B44-666-NL	
1-1/2"	2"	2"	8-1/4"	11.1	B44-677-NL	
2"	2"	2"	7-1/4"	13.8	B44-777-NL	

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.
 *Available with Padlock Wing only.



FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS NO C89833)
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction.
- Ends are integral or secured with adhesive to prevent unintentional disassembly.
- Hole for attaching curb box rod or handle is provided in tee-head.
- 300 PSI working pressure.
- The product has the letters "NL" cast into the main body for proper identification.
- UL Classified to ANSI/NSF Standard 61.

Optional Padlock Wing for locking valve in closed position. Insert "W" into part number.
Optional Full 360° tee-head rotation. Insert "R" into part number.

Vermont Agency of Transportation
RECEIVED
 CK'D BY MEM OK'D BY CWC
 Feb. 23, 2015
 RESUBMIT APPROVED ✓
 BY C. Carlson DATE 05-01-2015

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.

FORD
The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 http://www.fordmeterbox.com

Submitted By: _____

Feb. 23, 2015

RESUBMIT
BY C. Carlson

APPROVED ✓
DATE 05-01-2015

Eclipse Boxes

Fig. No. E-100 & E-125

Eclipse Boxes Complete

- "Eclipse" Arched Pattern Curb Boxes in two steel pipe shaft sizes: 1" (Fig. No. E-100) 1 1/4" (Fig. No. E-125) for curb stops 1/2"-1 1/4".
- Steel Pipe Shaft available in 1" or 1 1/4" is adjustable up and down and held in place by a brass ring.
- Bottom is cast iron. It is belled and arched to fit curb stops.
- The permanent steel rod is forged at the top end to receive a short cut-off wrench. The rod is welded to the cut-off key at the bottom. A connecting pin is provided to attach the key to the valve tee. A centering ring is placed on the rod to keep rod centered in the top pipe section. Fig. No. 4901-RS also available.
- Lids are cast iron in two separate designs:
Type A — Cast iron with water works head and pentagon brass plug.
Type B — Cast iron with two 1/2" holes for operating with a straddle wrench. Has brass bushing with standard pipe thread to attach to pipe section.
- Complete curb box consists of lid, top pipe, cast iron bottom, and rod assembly (rod, ring and pin).
- All "Eclipse" Boxes have 12" range of extension
- 5/8" Steel Rod. 1" and 1 1/4" Steel Pipe.

When Ordering Specify: Fig. No. – Size No. – Cover marked GAS or WATER or Special Lettering at Extra Cost.


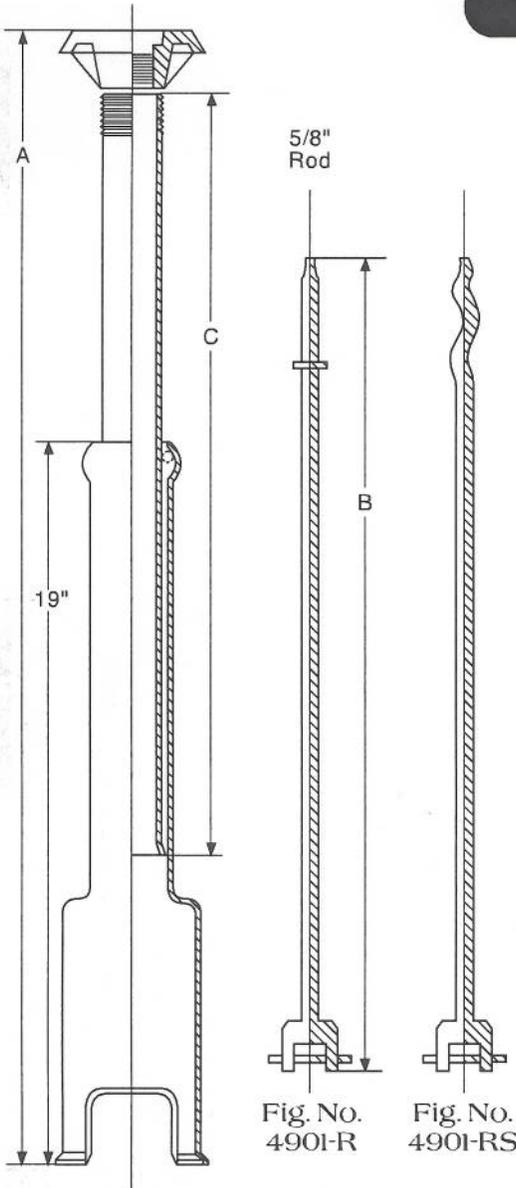


Fig. No. E-100 & E-125

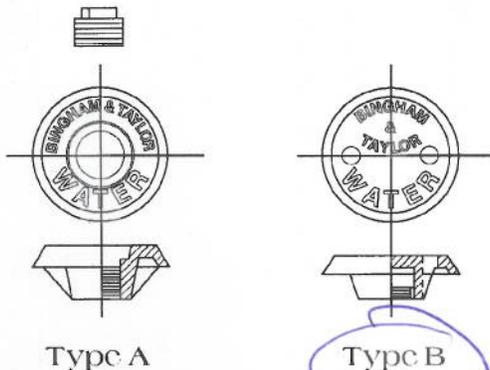

Type A

Type B

Size Dim. A	Rod Dim. B	Pipe Dim. C	Weight
1.5-2.5	16.75	11	15.0
2.0-3.0	21.00	17	16.0
2.5-3.5	27.00	23	16.5
3.0-4.0	33.00	29	17.0
3.5-4.5	39.00	35	18.0
4.0-5.0	45.00	41	19.0
4.5-5.5	51.00	47	20.0
5.0-6.0	57.00	53	21.0
5.5-6.5	63.00	59	22.0
6.0-7.0	69.00	65	23.0
6.5-7.5	75.00	71	24.0
7.0-8.0	81.00	77	25.0

Size Dim. A	Rod Dim. B	Pipe Dim. C	Weight
1.5-2.5	16.75	13	15.0
2.0-3.0	21.00	19	16.0
2.5-3.5	27.00	25	16.5
3.0-4.0	33.00	33	17.0
3.5-4.5	39.00	37	18.0
4.0-5.0	45.00	43	19.0
4.5-5.5	51.00	49	20.0
5.0-6.0	57.00	55	21.0
5.5-6.5	63.00	61	22.0
6.0-7.0	69.00	67	23.0
6.5-7.5	75.00	73	24.0
7.0-8.0	81.00	79	25.0

w/ 30" SS ROD