J.A. McDONALD, INC.

PO Box 132, Lyndon Center, VT 05850 (802) 626-5201

CORPORATE RESOLUTION DESIGNATING AGENT

J. A. McDONALD, INC.

J. A. McDonald, Inc., a Vermont Corporation ("The Corporation"), by this written consent of its sole director, adopts the following resolution:

Be It Resolved that Eric Boyden and Judythe D. Desrochers, or either of them, are hereby designated as the Corporation's Agents for the purposes of signing on behalf of the Corporation any and all contracts, subcontracts, change orders, supplementary agreements and bonds relating to the Contract between the Corporation and the Vermont Agency of Transportation for the construction project consisting of replacement of Bridge 11 with a new precast concrete structure with related approach and channel work; known as – VAOT Project Clarendon BRO 1443(48).

Each of Eric Boyden and Judythe D. Desrochers is hereby authorized to execute on the Corporation's behalf any document or instrument necessary or desirable to implement and fulfill the terms of the Contract for construction of the Clarendon BRO 1443(48) Project.

Effective as of the 3rd day of December, 2015.

J. A. McDONALD, INC.

BY: Judythe D. Desrochers

Judythe D. Desrochers, Corp. Secretary

State of Vermont
County of Caledonia

At Lyndon Center in the County of Caledonia this 3rd day of December, 2015, personally appeared Judythe D. Desrochers, Corporate Secretary of J. A. McDonald, Inc., and acknowledged the foregoing instrument by her sealed and subscribed to be her own free act and deed.

Before me,

Donna L. LaPoint

Notary Public
My Commission Expires: 2/10/2019

SCHEDULE OF INSURANCE RATES ON EXTRA WORK

APPLICABLE TO THE Clarendon BRO 1443 (48) PROJECT

To the Secretary of Transportation, Montpelier, Vermont

In connection with the contract for the above project, I/we submit herewith the following classification of work and the rates of insurance applicable to extra work performed and accepted on said project:

WORKER'S COMPENSATION

Classification No.	5606 Proj. Manager	Rate 2.67
Classification No.	6217 Excavation 6217 Grading	Rate 10.02 10.02
Classification No.	5507 Street & Road 6319 Water Mains	Rate 9.70 4.79
Classification No.	5222 Bridge - Concrete	Rate 10.78

GENERAL LIABILITY

Classification No.	91580 Exec. Supervisor	Rate 4.012
Classification No.	94007 Excavation 95410 Grading	Rate 4.458 2.153
Classification No.	99946 Water Mains 99315 Street & Road	Rate 2.751 3.597
Classification No.	91266 Bridge - Concrete	Rate 3.542

AUTOMOBILE LIABILITY

Classification No.	Light Truck	Rate $ 447
Classification No.	Medium Truck	Rate $ 466
Classification No.	Heavy Truck	Rate $ 528
Classification No.	Extra Heavy Truck	Rate $ 1,061

*Federal Social Security Act	Rate 7.65%
*Federal Unemployment Insurance	Rate 0.60% (Net)
*Vermont Unemployment Compensation Act	Rate 8.4%

All items of insurance as above on extra work performed and accepted shall be allowed on the final estimate as per the Vermont Standard Specifications For Construction.

December 4, 2015
Date

J. A. McDonald, Inc.
Name of Corporation, Co-Partnership or Individual

Eric Boyden, President
Name and Title of Individual Signing the Contract

Lyndon Center, VT 05850
Town or City, State

*MUST BE FILLED IN

VERMONT

State of Vermont
Agency of Transportation
Contract Administration
One National Life Drive
Montpelier, VT 05633-5001
www.aot.state.vt.us/conadmin

[phone] 802-828-2641
[fax] 802-828-5545
[ttd] 800-253-0191

CA-95

TO: CONTRACT ADMINISTRATION
MONTPELIER, VERMONT

RE: Clarendon BRO 1443 (48)

I hereby certify that I have access to the STANDARD SPECIFICATIONS FOR CONSTRUCTION, dated 2011, by clicking: http://vtranscontracts.vermont.gov/construction-contracting/2011-standard-specifications

Respectfully,

J. A. McDonald, Inc.
Name of Corporation, Co-Partnership or Individual

Eric Boyden
Name of Individual Signing the Contract

Signature of Individual Signing the Contract

President
Title of Individual Signing the Contract

To be filled in completely by Contractor

(Street) P.O. Box 132
(Town or City) Lyndon Center
(State) Vermont
(Date) November 24, 2015

To be filled in completely by Contractor

JAMCD-1 OP ID: BD

ACORD

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 12/01/2015

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
Paige & Campbell, Inc.
P.O. Box 469
Barre, VT 05641
Jonathon P. Shea, CPCU
Phone: 802-476-6631
Fax: 802-476-5917

CONTACT NAME:
PHONE (A/C, No, Ext):
FAX (A/C, No):
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A : Travelers Insurance Co.	25682
INSURER B :	
INSURER C :	
INSURER D :	
INSURER E :	
INSURER F :	

INSURED
J A McDonald Inc.
P.O. Box 132
Lyndon Center, VT 05850

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	GENERAL LIABILITY X COMMERCIAL GENERAL LIABILITY CLAIMS-MADE X OCCUR X Contractual Liab GEN'L AGGREGATE LIMIT APPLIES PER: POLICY X PRO-JECT LOC	X		DTCO584M645599	12/10/2014	12/10/2015	EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence) MED EXP (Any one person) PERSONAL & ADV INJURY GENERAL AGGREGATE PRODUCTS - COMP/OP AGG	$ 1,000,000 $ 300,000 $ 15,000 $ 1,000,000 $ 2,000,000 $ 2,000,000 $
A	AUTOMOBILE LIABILITY X ANY AUTO ALL OWNED AUTOS HIRED AUTOS SCHEDULED AUTOS NON-OWNED AUTOS			DT810584M645599	12/10/2014	12/10/2015	COMBINED SINGLE LIMIT (Ea accident) BODILY INJURY (Per person) BODILY INJURY (Per accident) PROPERTY DAMAGE (Per accident)	$ 1,000,000 $ $ $ $
A	X UMBRELLA LIAB X OCCUR EXCESS LIAB CLAIMS-MADE DED X RETENTION $ 10,000			DTCUP584M6455	12/10/2014	12/10/2015	EACH OCCURRENCE AGGREGATE	$ 10,000,000 $ 10,000,000 $
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) Y/N N If yes, describe under DESCRIPTION OF OPERATIONS below	N/A		DTJUB-530M003	01/01/2015	01/01/2016	X WC STATU-TORY LIMITS OTH-ER E.L. EACH ACCIDENT E.L. DISEASE - EA EMPLOYEE E.L. DISEASE - POLICY LIMIT	$ 1,000,000 $ 1,000,000 $ 1,000,000
A	Equipment Floater			QT660540M2764	12/10/2014	12/10/2015	SEE BELOW	IF APPLIES *

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Re: Clarendon BRO 1443(48)

Certificateholder is additional insured for general liability as required in a signed contract.

CERTIFICATE HOLDER

VTAOT02

VT Agency of Transportation
Transportation Contracts
Specialist
One National Life Drive
Montpelier, VT 05633-5001

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

S Francine Deede

© 1988-2010 ACORD CORPORATION. All rights reserved.

The ACORD name and logo are registered marks of ACORD

Compliance Bond

Bond # 091848

CA-112

STATE OF VERMONT
CONTRACT BOND

KNOW ALL MEN BY THESE PRESENTS, That we J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

as Principal, and Berkley Insurance Company
475 Steamboat Road
Greenwich, CT 06830

as Surety, are held and firmly bound unto the State of Vermont, as Obligee, in the penal sum of One Million Three Hundred Fifty Three Thousand Four Hundred Sixty Nine Dollars and Fifty Cents ($1,353,469.50), good and lawful money of the United States of America, for the payment of which, well and truly to be made, we bind ourselves, our heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the above bounden Principal has entered into a certain written contract with the above named Obligee, the State of Vermont dated the 4th day of December A.D. 2015 for the construction of a certain project in the State of Vermont known as **Clarendon BRO 1443 (48)** which contract is hereby referred to and made a part hereof as fully and to the same extent as if set forth at length herein:

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH that, if the above bounden Principal and his subcontractors and his or their agents and servants shall well and truly keep, do and perform, each and every, all and singular the matters and things in said contract set forth and specified to be by the said Principal kept, done and performed at the time and in the manner in said contract specified and shall pay over, make good and reimburse the State of Vermont all loss or losses and damage or damages which the above named Obligee, the State of Vermont, may sustain by reason of failure or default on the part of the Principal or his subcontractors, or his or their agents and servants, to fully carry out the terms of said contract, then this obligation shall be void; otherwise, to be and remain in full force and effect.

In Witness Whereof we hereunto set our hands and seals this 4 day of December A.D. 2015.

In Presence of **(TWO WITNESSES REQUIRED)**

Barbara S. Horn

[illegible]

as to Principal

J. A. McDonald, Inc.
Name of Corporation, Co-partnership or Individual

[illegible] L.S.
Authorized Signature

President
Title

(TWO WITNESSES REQUIRED)

Rosa Robbins

[illegible]

as to Surety.

Berkley Insurance Company
Bonding Company

S Francine Beede L.S.
Authorized Signature

S. Francine Beede, Attorney-In-Fact
Title

Compliance Bond

CONTRACT BOND

J.A. McDonald, Incorporated

585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

Principal

Berkley Insurance Company

475 Steamboat Road
Greenwich, CT 06830

Surety.

and

STATE OF VERMONT

Obligee.

Date 12/4 2015

Amount, $1,353,469.50

Approved 12/4 2015

Secretary of Transportation
or Duly Authorized Agent

Bond # 091848

Labor and Materials Bond

CA-113

STATE OF VERMONT
CONTRACT BOND

KNOW ALL MEN BY THESE PRESENTS, That we J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

as Principal, and Berkley Insurance Company
475 Steamboat Road
Greenwich, CT 06830

As Surety, are held and firmly bounden, unto the Secretary of Transportation for the State of Vermont, and his successors in office, as Obligee, in the penal sum of One Million Three Hundred Fifty Three Thousand Four Hundred Sixty Nine Dollars and Fifty Cents ($1,353,469.50), good and lawful money of the United States of America, for the payment of which, well and truly to be made, we bind ourselves, our heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the above bounden Principal has entered into a certain written contract with the State of Vermont, dated the 4th day of December A.D. 2015 for the construction of a certain project in the State of Vermont known **Clarendon BRO 1443 (48)** which contract is hereby referred to and made a part hereof as fully and to the same extent as if set forth at length herein:

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH that, if the above bounden, Principal shall pay, settle, liquidate and discharge the claims of all creditors for material, merchandise, labor, rent, hire of vehicles, power shovels, rollers, concrete mixers, tools and other appliances, professional services, premiums and other services used or employed in carrying out the terms of said contract between said Principal and the State of Vermont, and shall pay all taxes, both State and municipal, and contributions to the Vermont Commissioner of Employment and Training, accruing during the term of performance of said contract, this agreement to make such payment being in compliance with the requirements of 19 Vermont Statutes Annotated, Section 10(9), as amended, to furnish security there under, and being in fact such security, then this obligation shall be void; otherwise, to be and remain in full force and effect.

In Witness Whereof we hereunto set our hands and seals this 4 day of December A.D. 2015.

In Presence of **(TWO WITNESSES REQUIRED)**

Barbara S. Hanin
Carl Phu
as to Principal

J. A. McDonald, Inc.
Name of Corporation, Co-partnership or Individual

L.S.
Authorized Signature

President
Title

(TWO WITNESSES REQUIRED)

Rosa Robbins
Ruth Tyrel
as to Surety.

Berkley Insurance Company
Bonding Company

S. Francine Beede L.S.
Authorized Signature

S. Francine Beede, Attorney-In-Fact
Title

Labor & Materials Bond

CONTRACT BOND

J.A. McDonald, Incorporated

585 Gilman Road
PO Box 132
Lyndon Center, VT 05850
Principal

Berkley Insurance Company

475 Steamboat Road
Greenwich, CT 06830
Surety.

and

STATE OF VERMONT

Obligee.

Date 12/4 2015

Amount, $1,353,469.50

Approved 12/4 2015

Secretary of Transportation
or Duly Authorized Agent

No. BI- 438

POWER OF ATTORNEY
BERKLEY INSURANCE COMPANY
WILMINGTON, DELAWARE

NOTICE: The warning found elsewhere in this Power of Attorney affects the validity thereof. Please review carefully.

KNOW ALL MEN BY THESE PRESENTS, that BERKLEY INSURANCE COMPANY (the "Company"), a corporation duly organized and existing under the laws of the State of Delaware, having its principal office in Greenwich, CT, has made, constituted and appointed, and does by these presents make, constitute and appoint: ***Jonathon P. Shea, Steven M. Shea, S. Francine Beede or Susanne J. Megrath of Paige & Campbell, Inc. of Barre, Vermont*** its true and lawful Attorney-in-Fact, to sign its name as surety only as delineated below and to execute, seal, acknowledge and deliver any and all bonds and undertakings, with the exception of Financial Guaranty Insurance, providing that no single obligation shall exceed ***Twenty Five Million and 00/100 U.S. Dollars (U.S.$25,000,000.00)***, to the same extent as if such bonds had been duly executed and acknowledged by the regularly elected officers of the Company at its principal office in their own proper persons.

This Power of Attorney shall be construed and enforced in accordance with, and governed by, the laws of the State of Delaware, without giving effect to the principles of conflicts of laws thereof. This Power of Attorney is granted pursuant to the following resolutions which were duly and validly adopted at a meeting of the Board of Directors of the Company held on January 25, 2010:

RESOLVED, that, with respect to the Surety business written by Berkley Surety Group, the Chairman of the Board, Chief Executive Officer, President or any Vice President of the Company, in conjunction with the Secretary or any Assistant Secretary are hereby authorized to execute powers of attorney authorizing and qualifying the attorney-in-fact named therein to execute bonds, undertakings, recognizances, or other suretyship obligations on behalf of the Company, and to affix the corporate seal of the Company to powers of attorney executed pursuant hereto; and said officers may remove any such attorney-in-fact and revoke any power of attorney previously granted; and further

RESOLVED, that such power of attorney limits the acts of those named therein to the bonds, undertakings, recognizances, or other suretyship obligations specifically named therein, and they have no authority to bind the Company except in the manner and to the extent therein stated; and further

RESOLVED, that such power of attorney revokes all previous powers issued on behalf of the attorney-in-fact named; and further

RESOLVED, that the signature of any authorized officer and the seal of the Company may be affixed by facsimile to any power of attorney or certification thereof authorizing the execution and delivery of any bond, undertaking, recognizance, or other suretyship obligation of the Company; and such signature and seal when so used shall have the same force and effect as though manually affixed. The Company may continue to use for the purposes herein stated the facsimile signature of any person or persons who shall have been such officer or officers of the Company, notwithstanding the fact that they may have ceased to be such at the time when such instruments shall be issued.

IN WITNESS WHEREOF, the Company has caused these presents to be signed and attested by its appropriate officers and its corporate seal hereunto affixed this 10 day of May, 2013.

Attest:

(Seal) By _____
Ira S. Lederman
Senior Vice President & Secretary

Berkley Insurance Company

By _____
Jeffrey M. Hafter
Senior Vice President

WARNING: THIS POWER INVALID IF NOT PRINTED ON BLUE "BERKLEY" SECURITY PAPER.

STATE OF CONNECTICUT)
) ss:
COUNTY OF FAIRFIELD)

Sworn to before me, a Notary Public in the State of Connecticut, this 10 day of May, 2013, by Ira S. Lederman and Jeffrey M. Hafter who are sworn to me to be the Senior Vice President and Secretary, and the Senior Vice President, respectively, of Berkley Insurance Company.

_____
Notary Public, State of Connecticut

KATHLEEN COREY
NOTARY PUBLIC
CONNECTICUT
MY COMMISSION EXPIRES OCTOBER 31, 2017

CERTIFICATE

I, the undersigned, Assistant Secretary of BERKLEY INSURANCE COMPANY, DO HEREBY CERTIFY that the foregoing is a true, correct and complete copy of the original Power of Attorney; that said Power of Attorney has not been revoked or rescinded and that the authority of the Attorney-in-Fact set forth therein, who executed the bond or undertaking to which this Power of Attorney is attached, is in full force and effect as of this date.

Given under my hand and seal of the Company, this 4 day of December, 2015.

(Seal)

_____
Andrew M. Tuma

WARNING – Any unauthorized reproduction or alteration of this document is prohibited. This power of attorney is void unless seals are readable and the certification seal at the bottom is embossed. The background imprint, warning and confirmation (on reverse) must be in blue ink.

Instructions for Inquiries and Notices Under the Bond Attached to This Power

Berkley Surety Group is the affiliated underwriting manager for the surety business of: Acadia Insurance Company, Berkley Insurance Company, Berkley Regional Insurance Company, Carolina Casualty Insurance Company, Union Standard Insurance Company, Continental Western Insurance Company, and Union Insurance Company.

To verify the authenticity of the bond, please call (866) 768-3534 or email BSGInquiry@berkleysurety.com

---

Any written notices, inquiries, claims or demands to the surety on the bond to which this Rider is attached should be directed to:

Berkley Surety Group
412 Mount Kemble Avenue
Suite 310N
Morristown, NJ 07960
Attention: Surety Claims Department

Or

email BSGClaim@berkleysurety.com

Please include with all notices the bond number and the name of the principal on the bond. Where a claim is being asserted, please set forth generally the basis of the claim. In the case of a payment or performance bond, please identify the project to which the bond pertains.

No. BI- 438

POWER OF ATTORNEY
BERKLEY INSURANCE COMPANY
WILMINGTON, DELAWARE

NOTICE: The warning found elsewhere in this Power of Attorney affects the validity thereof. Please review carefully.

KNOW ALL MEN BY THESE PRESENTS, that BERKLEY INSURANCE COMPANY (the "Company"), a corporation duly organized and existing under the laws of the State of Delaware, having its principal office in Greenwich, CT, has made, constituted and appointed, and does by these presents make, constitute and appoint: ***Jonathon P. Shea, Steven M. Shea, S. Francine Beede or Susanne J. Megrath of Paige & Campbell, Inc. of Barre, Vermont*** its true and lawful Attorney-in-Fact, to sign its name as surety only as delineated below and to execute, seal, acknowledge and deliver any and all bonds and undertakings, with the exception of Financial Guaranty Insurance, providing that no single obligation shall exceed ***Twenty Five Million and 00/100 U.S. Dollars (U.S.$25,000,000.00)***, to the same extent as if such bonds had been duly executed and acknowledged by the regularly elected officers of the Company at its principal office in their own proper persons.

This Power of Attorney shall be construed and enforced in accordance with, and governed by, the laws of the State of Delaware, without giving effect to the principles of conflicts of laws thereof. This Power of Attorney is granted pursuant to the following resolutions which were duly and validly adopted at a meeting of the Board of Directors of the Company held on January 25, 2010:

RESOLVED, that, with respect to the Surety business written by Berkley Surety Group, the Chairman of the Board, Chief Executive Officer, President or any Vice President of the Company, in conjunction with the Secretary or any Assistant Secretary are hereby authorized to execute powers of attorney authorizing and qualifying the attorney-in-fact named therein to execute bonds, undertakings, recognizances, or other suretyship obligations on behalf of the Company, and to affix the corporate seal of the Company to powers of attorney executed pursuant hereto; and said officers may remove any such attorney-in-fact and revoke any power of attorney previously granted; and further

RESOLVED, that such power of attorney limits the acts of those named therein to the bonds, undertakings, recognizances, or other suretyship obligations specifically named therein, and they have no authority to bind the Company except in the manner and to the extent therein stated; and further

RESOLVED, that such power of attorney revokes all previous powers issued on behalf of the attorney-in-fact named; and further

RESOLVED, that the signature of any authorized officer and the seal of the Company may be affixed by facsimile to any power of attorney or certification thereof authorizing the execution and delivery of any bond, undertaking, recognizance, or other suretyship obligation of the Company; and such signature and seal when so used shall have the same force and effect as though manually affixed. The Company may continue to use for the purposes herein stated the facsimile signature of any person or persons who shall have been such officer or officers of the Company, notwithstanding the fact that they may have ceased to be such at the time when such instruments shall be issued.

IN WITNESS WHEREOF, the Company has caused these presents to be signed and attested by its appropriate officers and its corporate seal hereunto affixed this 10 day of May, 2013.

Attest: Berkley Insurance Company

(Seal) By _____ By _____

Ira S. Lederman
Senior Vice President & Secretary

Jeffrey M. Hafter
Senior Vice President

WARNING: THIS POWER INVALID IF NOT PRINTED ON BLUE "BERKLEY" SECURITY PAPER.

STATE OF CONNECTICUT)
) ss:
COUNTY OF FAIRFIELD)

Sworn to before me, a Notary Public in the State of Connecticut, this 10 day of May, 2013, by Ira S. Lederman and Jeffrey M. Hafter who are sworn to me to be the Senior Vice President and Secretary, and the Senior Vice President, respectively, of Berkley Insurance Company.

_____
Notary Public, State of Connecticut

KATHLEEN COREY
NOTARY PUBLIC
CONNECTICUT
MY COMMISSION EXPIRES OCTOBER 31, 2017

CERTIFICATE

I, the undersigned, Assistant Secretary of BERKLEY INSURANCE COMPANY, DO HEREBY CERTIFY that the foregoing is a true, correct and complete copy of the original Power of Attorney; that said Power of Attorney has not been revoked or rescinded and that the authority of the Attorney-in-Fact set forth therein, who executed the bond or undertaking to which this Power of Attorney is attached, is in full force and effect as of this date.

Given under my hand and seal of the Company, this 4 day of December, 2015.

(Seal) _____
Andrew M. Tuma

WARNING – Any unauthorized reproduction or alteration of this document is prohibited. This power of attorney is void unless seals are readable and the certification seal at the bottom is embossed. The background imprint, warning and confirmation (on reverse) must be in blue ink.

Instructions for Inquiries and Notices Under the Bond Attached to This Power

Berkley Surety Group is the affiliated underwriting manager for the surety business of: Acadia Insurance Company, Berkley Insurance Company, Berkley Regional Insurance Company, Carolina Casualty Insurance Company, Union Standard Insurance Company, Continental Western Insurance Company, and Union Insurance Company.

To verify the authenticity of the bond, please call (866) 768-3534 or email BSGInquiry@berkleysurety.com

---

Any written notices, inquiries, claims or demands to the surety on the bond to which this Rider is attached should be directed to:

Berkley Surety Group
412 Mount Kemble Avenue
Suite 310N
Morristown, NJ 07960
Attention: Surety Claims Department

Or

email BSGClaim@berkleysurety.com

Please include with all notices the bond number and the name of the principal on the bond. Where a claim is being asserted, please set forth generally the basis of the claim. In the case of a payment or performance bond, please identify the project to which the bond pertains.

STATE OF VERMONT

AGENCY OF TRANSPORTATION

SPECIAL PROVISIONS
CONTRACT AGREEMENT
CONTRACT SCHEDULE

PROJECT NUMBER	PROJECT NAME
BRO 1443 (48)	**CLARENDON**

Date of Letting	November 6, 2015
Date of Contract	December 4, 2015
Anticipated Completion Date	September 2, 2016
Amount of Contract	$1,353,469.50

Contractor	J.A. McDonald, Inc.
Address	585 Gilman Road PO Box 132 Lyndon Center VT 05850

Bonding Company	Berkley Insurance Company
Address	475 Steamboat Road Greenwich, CT 06830

Project
Clarendon BRO 1443 (48)

VERMONT
AGENCY OF TRANSPORTATION
2011 Standard Specifications for Construction

CONTRACT AGREEMENT

J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

Required Contract Provisions for Federal-Aid Construction
Standard Federal EEO Specifications
Vermont Agency of Transportation Contractor Workforce Reporting Requirements
Workers' Compensation; State Contracts Compliance Requirement
General Special Provisions dated April 7, 2015
Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants
Special Provisions
Vermont Minimum Labor & Truck Rates
Disadvantaged Business Enterprise (DBE) Policy Contract Requirements
US Department of Labor Davis – Bacon Wage Rates
Asphalt Price Adjustment Provisions dated April 6, 2010
Stream Alteration Consultation #HD-1-0447 (e-mail) dated June 5, 2014
Army Corps of Engineers Permit #NAE-2014-1203 dated July 23, 2014
Certification for Federal-Aid Contracts
Contractor's EEO Certification
Contract CA-111-B Form
Schedule of Items
Contractor's Signature Page

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

   The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

   Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

   Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

   a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

   b. The contractor will accept as its operating policy the following statement:

      "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. **EEO Officer:** The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

   b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. **Training and Promotion:**

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. **Unions:** If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. **Reasonable Accommodation for Applicants / Employees with Disabilities:** The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. **Assurance Required by 49 CFR 26.13(b):**

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. **Minimum wages**

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
(ii) The classification is utilized in the area by the construction industry; and
(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. **Withholding**

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. **Payrolls and basic records**

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency.

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. **Apprentices and trainees**

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. **Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. **Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. **Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. **Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. **Disputes concerning labor standards.** Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. **Certification of eligibility.**

    a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

    b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

    c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. **Overtime requirements.** No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. **Violation; liability for unpaid wages; liquidated damages.** In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. **Withholding for unpaid wages and liquidated damages.** The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. **Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

   a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

   (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

   (2) the prime contractor remains responsible for the quality of the work of the leased employees;

   (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

   (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

   B "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. **Instructions for Certification – First Tier Participants:**

   a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

   b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

   c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

   d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

   e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

   f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

   g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

   h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

   i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

*****

2. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:**

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

*****

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

*****

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

   a. To the extent that qualified persons regularly residing in the area are not available.

   b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

   c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

CA-26

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (EXECUTIVE ORDER 11246)

1. As used in these specifications:

   a. "Covered Area" means the geographical area described in the solicitation from which this contract resulted.

   b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority.

   c. "Employer Identification Number" means the Federal Social Security Number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

   A Minority Group Member is:

   ...American Indian or Alaskan Native
   consisting of all persons having origins in any of the original people of North American and who maintain cultural identification through tribal affiliations or community recognition.

   ...Black
   consisting of all persons having origins in any of the Black racial groups of Africa.

   ...Asian or Pacific Islander
   consisting of all persons having origins in any of the original people of the Far East, Southeast Asia, the Indian Sub-Continent or the Pacific Islands. This area includes China, India, Japan, Korea, the Philippines and Samoa.

   ...Hispanic
   consisting of all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish culture or origin.

   ...Cape Verde an
   consisting of all persons having origins in the Cape Verde Islands.

   ...Portuguese
   consisting of all persons of Portuguese, Brazilian or other Portuguese culture or origin.

2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of $10,000.00 the provisions of these specifications and the notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in the Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or subcontract participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. the overall good faith performance by other Contractors or subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or subcontractor's failure to make good faith efforts to achieve the Plan goals and timetables.

4. The Contractor shall implement the specific affirmative action standards provided in Paragraphs 7a through p of these specifications. The goals set for the Contractor in the solicitation from which this contract resulted are expressed as percentages in the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. The Contractor is expected to make substantially uniform progress toward its goals in each craft during the period specified.

5. Neither the provisions of any collective bargaining agreement nor the failure by a union with whom the Contractor has a collective bargaining agreement to refer either minority or women shall excuse the Contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the non-working training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity . The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully and shall implement affirmative action steps at least as extensive as the following:

   a. Ensure and maintain a working environment free of harassment, intimidation and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment with specific attention to minority or female individuals working at such sites or in such facilities.

   b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.

d. Provide immediate written notifications to the Regional Director when the union or unions, with which the Contractor has a collective bargaining agreement, have not referred to the Contractor a minority person or woman sent by the Contractor or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under Paragraph 7b above.

f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction is performed.

g. Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, Supervisors etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, and providing written notification to, and discussing the Contractor's EEO policy with, other Contractors and subcontractors with whom the Contractor anticipates doing business.

i. Direct its recruitment efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notifications to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment-related activities to ensure that the EEO policy and Contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are non-segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (Paragraph 7a through p). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the Contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under Paragraph 7a through p of these Specifications provided that the Contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, reflected in the Contractor's minority and female workforce participation , makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's, and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's non-compliance.

9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is under-utilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex or national origin.

11. The Contractor shall not enter into any subcontract with any person for firm debarred from Government contracts pursuant to Executive Order 11246.

12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, terminations and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in Paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.

14. The Contractor shall designate a responsible official to monitor all employment-related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application or requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)

1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.

2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

Economic Areas	Timetables	Goals for Minority participation for each trade (%)	Goals for Female Participation in each trade (%)
Entire State of Vermont:			
Vermont 003 Burlington, VT Non-SMSA Counties NH Coos; NH Grafton: NH Sullivan; VT Addison; VT Caledonia; VT Chittenden; VT Essex; VT Franklin; VT Grand Isle; VT Lamoille; VT Orange; VT Orleans; VT Rutland; VT Washington; VT Windsor	Indefinite	0.8	6.9
Connecticut (Mass) 006 Hartford - New Haven Springfield, CT-MA Non-SMSA Counties CT Litchfield; CT Windham; MA Franklin; NH Cheshire; VT Windham	Indefinite	5.9	
New York 007 Albany - Schnectady - Troy, NY Non-SMSA Counties NY Clinton; NY Columbia; NY Essex; NY Fulton; NY Greene; NY Hamilton; NY Sohoharie; NY Warren; NY Washington; VT Bennington	Indefinite	2.6	

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulation in CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3 (a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten working days of award of any construction subcontract in excess of $10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notifications shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; and the geographical area in which the subcontract is to be performed.

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is (insert description of the geographical areas where the contract is to be performed giving the state, county and city, if any)

VERMONT AGENCY OF TRANSPORTATION
CONTRACTOR WORKFORCE REPORTING REQUIREMENTS

The Contractor/Subcontractor shall submit to the State Resident Engineer assigned to this project, monthly and cumulative workforce information, on reporting forms provided herein. The monthly and cumulative workforce information shall be listed by construction trade category with the percentage of minority and female project hours in each category indicated. Failure to provide this information to the Resident Engineer on a monthly basis will result in suspension of bi-weekly progress payments, or part thereof due under the contract, until such time as the Contractor or Subcontractor demonstrates compliance with these contract terms.

Note: In lieu of using the reporting forms provided herein, the Contractor may use U.S. Department of Labor form CC-257, "Monthly Employment Utilization Report".

VTrans Working to Get You There
Vermont Agency of Transportation

CONTRACTOR MONTHLY EMPLOYMENT UTILIZATION REPORT
Vermont Agency of Transportation
Office of Civil Rights and Labor Compliance

PROJECT NAME AND NUMBER:	CURRENT GOALS	REPORTING PERIOD
	MINORITY:	FROM:
	FEMALE: 6.9%	TO:

CONTRACTOR'S NAME AND ADDRESS: _____

NUMBER OF WORK HOURS OF EMPLOYMENT												PERCENTAGE		NUMBER OF EMPLOYEES			
CONSTRUCTION TRADE CLASSIFICATION	TOTAL NUMBER - ALL WORK HOURS OF EMPLOYEES *BY TRADE*	BLACK (NOT OF HISPANIC ORIGIN)		HISPANIC		ASIAN OR PACIFIC ISLANDERS		AMERICAN INDIAN OR ALASKAN NATIVE		WHITE (NOT OF HISPANIC ORIGIN)		*PERCENTAGE* OF TOTAL WORK HOURS BY MINORITY & FEMALE		TOTAL *NUMBER* OF EMPLOYEES		TOTAL *NUMBER* OF MINORITY EMPLOYEES	
	(BOTH MALE AND FEMALE)	M	F	M	F	M	F	M	F	M	F	MINORITY	FEMALE	M	F	M	F
TOTALS												%	%				

COMPANY OFFICIAL'S SIGNATURE AND TITLE	TELEPHONE NUMBER	DATE SIGNED	PAGE _____ OF _____

INSTRUCTIONS FOR FILING
MONTHLY EMPLOYMENT UTILIZATION REPORT

1. **PROJECT NAME AND NUMBER**
   Complete project name and number as assigned by the Vermont Agency of Transportation.

2. **CONTRACTOR'S NAME AND ADDRESS**
   Indicate the name and address of the *PRIME CONTRACTOR* with a construction contract funded in whole or in part with Federal funds.

3. **CURRENT GOALS**
   See section of contract regarding requirement for Affirmative Action (Executive Order 11246).

4. **REPORTING PERIOD**
   Monthly, beginning with the effective date of the contract.

5. **CONSTRUCTION TRADE CLASSIFICATION**
   Indicate only those classifications used on this contract.

6. **TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE**
   Indicate the total number of hours (male and female *combined*) worked by employees in each trade classification.

7. **BLACK,/HISPANIC/ASIAN/AMERICAN INDIAN/WHITE CATEGORIES**
   Indicate the total number of hours (male and female *separated*) worked by each specified ethnic group of employees in each classification.

8. **PERCENTAGE OF TOTAL WORK HOURS - MINORITY**
   Indicate the PERCENTAGE of total minority work hours (male and female MINORITIES *combined)* of all work hours (the sum of the BLACK, HISPANIC, ASIAN, and AMERICAN INDIAN columns divided by the sum of TOTAL NUMBER OF ALL WORK HOURS - just one figure for each construction trade.)

9. **PERCENTAGE OF TOTAL WORK HOURS - FEMALE**
   Divide the TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE for each classification by the total number of females reported in BLACK, HISPANIC, ASIAN, AMERICAN INDIAN **and WHITE** for each classification.

10. **TOTAL NUMBER OF EMPLOYEES**
    Indicate the total number of male employees and the total number of female employees working in each classification in the contractor's work force during the reporting period.

11. **TOTAL NUMBER OF MINORITY EMPLOYEES**
    Indicate the total number of male *MINORITY* employees and the total number of female *MINORITY (non-white)* employees working in each classification in the contractor's work force during the reporting period.

12. **COMPLETE THE FORM: SIGNATURE, TITLE, PHONE NUMBER, DATE, PAGE ____ OF ____.**

13. **AT THE END OF EACH MONTH, SUBMIT** the completed Monthly Employment Utilization Report Form to the State Resident Engineer on the project site. One of these forms should be completed for each month of the contract.

VTrans Working to Get You There
Vermont Agency of Transportation

CONTRACTOR CUMULATIVE MONTHLY EMPLOYMENT UTILIZATION REPORT
(Include ALL SUBCONTACTORS)

Vermont Agency of Transportation
Office of Civil Rights and Labor Compliance

PROJECT NAME AND NUMBER:	CURRENT GOALS	REPORTING PERIOD
	MINORITY: _____	FROM: _____
	FEMALE: 6.9%	TO: _____

CONTRACTOR'S NAME AND ADDRESS: _____

NUMBER OF WORK HOURS OF EMPLOYMENT												PERCENTAGE		NUMBER OF EMPLOYEES			
CONSTRUCTION TRADE CLASSIFICATION	TOTAL NUMBER - ALL WORK HOURS OF EMPLOYEES *BY TRADE*	BLACK (NOT OF HISPANIC ORIGIN)		HISPANIC		ASIAN OR PACIFIC ISLANDERS		AMERICAN INDIAN OR ALASKAN NATIVE		WHITE (NOT OF HISPANIC ORIGIN)		*PERCENTAGE* OF TOTAL WORK HOURS BY MINORITY & FEMALE		TOTAL *NUMBER* OF EMPLOYEES		TOTAL *NUMBER* OF MINORITY EMPLOYEES	
	(BOTH MALE AND FEMALE)	M	F	M	F	M	F	M	F	M	F	MINORITY	FEMALE	M	F	M	F
TOTALS												%	%				

COMPANY OFFICIAL'S SIGNATURE AND TITLE	TELEPHONE NUMBER	DATE SIGNED	PAGE _____ OF _____

INSTRUCTIONS FOR FILING
CUMULATIVE MONTHLY EMPLOYMENT UTILIZATION REPORT

[Using the Monthly Employment Utilization Reports collected from the subcontractors on the job, ***COMBINE all the information*** *to complete the CUMULATIVE Monthly Employment Utilization Report Form and submit to the State Resident Engineer on the project each month.]*

1. **PROJECT NAME AND NUMBER**
   Complete project name and number as assigned by the Vermont Agency of Transportation.

2. **CONTRACTOR'S NAME AND ADDRESS**
   Indicate the name and address of the *PRIME CONTRACTOR* with a construction contract funded in whole or in part with Federal funds.

3. **CURRENT GOALS**
   See section of contract regarding requirement for Affirmative Action (Executive Order 11246).

4. **REPORTING PERIOD**
   Monthly, beginning with the effective date of the contract.

5. **CONSTRUCTION TRADE CLASSIFICATION**
   Indicate only those classifications used on this contract.

6. **TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE**
   Indicate the total number of hours (male and female *combined*) worked by employees in each trade classification.

7. **BLACK,/HISPANIC/ASIAN/AMERICAN INDIAN/WHITE CATEGORIES**
   Indicate the total number of hours (male and female *separated*) worked by each specified ethnic group of employees in each classification.

8. **PERCENTAGE OF TOTAL WORK HOURS - MINORITY**
   Indicate the PERCENTAGE of total minority work hours (male and female MINORITIES *combined)* of all work hours (the sum of the BLACK, HISPANIC, ASIAN, and AMERICAN INDIAN columns divided by the sum of TOTAL NUMBER OF ALL WORK HOURS - just one figure for each construction trade.)

9. **PERCENTAGE OF TOTAL WORK HOURS - FEMALE**
   Divide the TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE for each classification by the total number of females reported in BLACK, HISPANIC, ASIAN, AMERICAN INDIAN **and WHITE** for each classification.

10. **TOTAL NUMBER OF EMPLOYEES**
    Indicate the total number of male employees and the total number of female employees working in each classification in the contractor's work force during the reporting period.

11. **TOTAL NUMBER OF MINORITY EMPLOYEES**
    Indicate the total number of male *MINORITY* employees and the total number of female *MINORITY (non-white)* employees working in each classification in the contractor's work force during the reporting period.

12. **COMPLETE THE FORM: SIGNATURE, TITLE, PHONE NUMBER, DATE, PAGE ____ OF ____.**

13. **AT THE END OF EACH MONTH, SUBMIT** the completed **CUMULATIVE** Monthly Employment Utilization Report Form to the State Resident Engineer on the project site. One of these forms should be completed for each month of the contract.

WORKERS' COMPENSATION; STATE CONTRACTS COMPLIANCE REQUIREMENT

Vermont Agency of Transportation
Subcontractor Reporting Form

This form must be completed in its entirety by the Contractor and included in all requests to sublet or assign work as outlined in Section 108.01 of the Standard Specifications for Construction.

The Agency of Transportation in accordance with Act 54, Section 32 of the Acts of 2009 and for total projects costs exceeding $250,000.00 requires the contractor to comply with the following provisions and requirements:

The Contractor is required to provide a list of subcontractors on the job along with lists of subcontractor's subcontractors and by whom those subcontractors are insured for workers' compensation purposes. Include additional pages if necessary. This is not a requirement for subcontractor's providing supplies only and no labor to the overall contract or project.

Subcontractor	Insured By		Subcontractor's Sub	Insured By

Date: _____ Project Name & Number: _____

Name of Company: _____ Contact Name: _____

Address: _____ Title: _____

_____ Phone Number: _____

E-mail: _____ Fax Number: _____

By: _____ Name: _____
Signature* (Type or Print)

*Form must be signed by individual authorized to sign on the contractor's behalf.

Rev. 11-01-10

GENERAL SPECIAL PROVISIONS FOR ALL PROJECTS
2011 STANDARD SPECIFICATIONS

SECTION 101 - DEFINITIONS AND TERMS

1. 101.01 ABBREVIATIONS, is hereby modified by adding the following new abbreviation directly after "ABS":

ACL	Advanced Certification List

2. 101.01 ABBREVIATIONS, is hereby further modified by adding the following new abbreviation directly after "ANSI":

APL	Approved Products List

3. 101.01 ABBREVIATIONS, is hereby still further modified by adding the following new abbreviation directly after "CPM":

CPPP	Corrugated Polypropylene Pipe

4. 101.02 DEFINITIONS, HOLIDAYS, is hereby modified by deleting the ninth row in the listing (for "Columbus Day").

5. 101.02 DEFINITIONS, HOLIDAYS, is hereby further modified by adding the following as the twelfth row in the listing (directly after "Thanksgiving Day"):

Day After Thanksgiving	Fourth Friday in November

SECTION 103 - TAXES AND INSURANCE

6. 103.04 INSURANCE REQUIREMENTS, part (e) General Insurance Conditions, is hereby modified by deleting the second paragraph in its entirety.

SECTION 105 - CONTROL OF THE WORK

7. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby modified by deleting the second paragraph in its entirety.

8. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby further modified by deleting the first sentence of the third paragraph.

9. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby still further modified by adding the phrase "in an accessible format" at the end of the third paragraph.

10. 105.03 PLANS AND WORKING DRAWINGS, part (b) Working Drawings, subpart (4) List of Working Drawings, is hereby modified by deleting the phrase "Roadway, Traffic, and Safety Engineer" and replacing it with the phrase "Project Manager" in the twenty-third row (beginning "641").

11. 105.14 SUNDAY AND HOLIDAY WORK, part (b) Holidays, is hereby corrected by deleting punctuation "," at the end of the paragraph and replacing it with punctuation ".".

12. 105.16 LOAD RESTRICTIONS, part (a) General, is hereby modified by being deleted in its entirety and replaced with the following:

    (a) General. All Contractors, subcontractors, suppliers, or others involved in any project-related activities shall comply with all legal load restrictions specified in Title 23 VSA § 1392 in the hauling of equipment or material on public roads, including that beyond the limits of the project. The application for and possession of any hauling or related permit will not relieve the Contractor or others involved in any project-related activities of any liability that may arise due to any damage resulting from the use or moving of equipment, vehicles, or any other project-related activity.

13. 105.16 LOAD RESTRICTIONS, part (b) Limitations or Use of Equipment and Vehicles, is hereby modified by being deleted in its entirety and replaced with the following:

    (b) Limitations on Use of Equipment and Vehicles. Use of equipment and vehicles is subject to the following:

        (1) No vehicle or equipment exceeding the load restrictions cited in Title 23 VSA § 1392 will be permitted on any structure as defined by the Engineer.

        (2) The operation of any equipment or vehicle of such mass (weight) or any other project-related equipment loaded so as to cause damage to structures, the roadway, or to any other type of active construction will not be permitted, regardless of the limits set forth in Title 23.

        (3) Hauling or operation of said vehicles or equipment over any permanent course of any bituminous pavement or any structure during active construction will not be permitted.

        (4) No loads of any category will be permitted on a concrete pavement or concrete structure prior to expiration of the curing period and until the concrete reaches its specified 28-day compressive strength.

        (5) Notwithstanding those restrictions above, the Contractor shall be responsible for any and all damages incurred to any public roadway as defined in Title 23 due to the use of any equipment or vehicles related to project activities.

14. 105.26 OPENING WASTE, BORROW, AND STAGING AREAS, part (f), is hereby corrected by deleting punctuation "." at the end of the paragraph.

SECTION 108 - PROSECUTION AND PROGRESS

15. 108.09 TEMPORARY SUSPENSION OF THE WORK, part (d) Seasonal Closure, is hereby modified by deleting the phrase "of the Engineer, and only under such conditions as specified therein" and replacing it with the phrase "from the Regional Construction Engineer".

16. 108.09 TEMPORARY SUSPENSION OF THE WORK, part (d) Seasonal Closure, is hereby further modified by adding the following:

Permission will only be granted for work which will result in a direct benefit to the State or the traveling public. Items which may be considered as a benefit include but are not limited to shorter Contract duration, a cost savings, increased safety for the traveling public, and an ability to ensure the quality of work. The Contractor shall request permission in writing, detailing what Contract items may be affected, a schedule of work, and the benefits to the State or traveling public.

17. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (8), is hereby modified by deleting the phrase ", delays in submittals, errors in submittals, and the Contractor's means and methods of construction".

18. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (9), is hereby modified by deleting the phrase ", including but not limited to the Contractor's means and methods of construction".

19. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (11), is hereby modified by being deleted in its entirety.

20. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (13), is hereby modified by adding the following as the first sentence:

Industry-wide material or supply shortages not reasonably anticipated by the Contractor at the time the Contract was entered.

21. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (13), is hereby further modified by changing the word "Delay" to the word "Delays" at the beginning of the first sentence.

22. 108.12 FAILURE TO COMPLETE WORK ON TIME, part (c) Liquidated Damages; General; Days Charged, is hereby modified by deleting the DAILY CHARGE FOR LIQUIDATED DAMAGES FOR EACH WORKING DAY OF DELAY table in its entirety and replacing it with a new table as follows:

DAILY CHARGE FOR LIQUIDATED DAMAGES
FOR EACH WORKING DAY OF DELAY

Original Contract Amount		
From More Than ($)	To And Including ($)	Daily Charge Per Day of Delay ($)
0	500,000	1,200.00
500,000	1,000,000	1,300.00
1,000,000	1,500,000	1,400.00
1,500,000	3,000,000	1,800.00
3,000,000	5,000,000	2,300.00
5,000,000	10,000,000	3,500.00
10,000,000	20,000,000	5,900.00
20,000,000+	---------	10,700.00

SECTION 109 - MEASUREMENT AND PAYMENT

23. SECTION 109 - MEASURMENT AND PAYMENT, is hereby corrected by deleting pages 1-141 and 1-142 in their entirety.

SECTION 203 - EXCAVATION AND EMBANKMENTS

24. 203.01 DESCRIPTION, is hereby modified by adding the phrase "performing test borings for the purpose of determining areas of roadway and embankment subsurface voids;" after the phrase "trimming and shaping of slopes;" in the first sentence of the first paragraph.

25. 203.01 DESCRIPTION, is hereby further modified by adding the following new part (l):

    (l) Test Borings. Test Borings shall consist of an investigative and planned approach to determining areas of roadway and embankment subsurface voids and repairing bored areas.

26. 203.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

    PVC Plastic Pipe.....710.06

27. 203.02 MATERIALS, is hereby further modified by adding the following paragraphs:

    Concrete for backfilling subsurface voids shall meet the requirements of Controlled Density (Flowable) Fill of Section 541.

    Bituminous concrete pavement shall conform to the requirements of Section 406 or 490, as applicable for the Contract, with the exception that the mix design submittal and plant inspection requirements set forth in Section 406 or 490 will not apply.

28. 203.03 GENERAL CONSTRUCTION REQUIREMENTS, is hereby modified by adding the following as the eighth paragraph:

    Prior to the construction of Test Borings and the placement of Controlled Density (Flowable) Fill, the Contractor shall submit to the Engineer site-specific plans, detailing the schedule of work (for these two items), type and location of drilling, sleeve installation, pumping system, confirmatory boring operation, method of filling bore hole (with or without voids being encountered), and repair of the roadway section (sand, gravel, and pavement).

29. 203.11 EMBANKMENTS, is hereby modified by adding the following new part (e):

    (e) Test Borings. Test borings shall be performed at the approximate locations indicated in the Plans and/or as directed by the Engineer.

    When used adjacent to culverts, test borings shall extend to a depth equal to the bottom of the culvert using casing advanced drilling methods. Alternate drilling equipment that provides a suitably clean, open hole may be submitted to the Engineer for approval.

If void(s) are encountered, Controlled Density (Flowable) Fill shall be placed to completely fill the void(s). Confirmatory borings shall be performed in these locations as directed by the Engineer.

The roadway surface at boring hole locations shall be backfilled and then patched using Bituminous Concrete Pavement.

30. 203.13 METHOD OF MEASUREMENT, is hereby modified by adding the following new part (e):

(e) Test Borings. The quantity of Test Borings to be measured for payment will be the number of meters (linear feet) of test boring performed in the complete and accepted work.

31. 203.14 BASIS OF PAYMENT, is hereby modified by adding the phrase "and Test Borings" after the phrase "Shoulder Berm Removal" in the first sentence of the first paragraph.

32. 203.14 BASIS OF PAYMENT, is hereby further modified by adding the phrase "submitting site-specific plans as required, performing test borings, installing sleeves, backfilling, patching with bituminous concrete pavement," after the phrase "work specified," in the second sentence of the first paragraph.

33. 203.14 BASIS OF PAYMENT, is hereby corrected by adding a period at the end of the sixth paragraph.

34. 203.14 BASIS OF PAYMENT, is hereby still further modified by adding the following paragraph and pay item:

Filling of subsurface voids encountered in performing Test Borings will be paid for under Contract item 541.45.

Payment will be made under:

Pay Item	Pay Unit
203.45 Test Borings	Meter (Linear Foot)

SECTION 310 – RECLAIMED STABILIZED BASE

35. 310.04 CONSTRUCTION, is hereby modified by deleting the phrase "or dust control" after the word "stabilizing" in the third paragraph.

36. 310.04 CONSTRUCTION, is hereby further modified by adding the following sentence to the third paragraph:

When a dust control agent is not exclusively specified on the Plans, water and/or Calcium Chloride shall be used as that agent to meet all requirements of this Section.

37. 310.10 BASIS OF PAYMENT, is hereby modified by adding the following as the fourth paragraph:

Calcium Chloride used for dust control after the reclamation will not be paid for directly, but will be considered incidental to the Reclaimed Stabilized Base item.

SECTION 406 - MARSHALL BITUMINOUS CONCRETE PAVEMENT

38. 406.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 406.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby modified by deleting footnote designation "(1)" after "Cold Feed Gradation" in the fourth row.

39. 406.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 406.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby further modified by adding the following as the fifth row:

Cold Feed % Fractured Face & Thin and Elongated Particles(1)	Day of initial paving and 1 per week(4)	ASTM D5821 ASTM D4791

40. 406.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 406.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby still further modified by deleting footnote 1 in its entirety and replacing it as follows:

1 - "Fractured faces" (for gravel sources only). "Thin and elongated" of particles retained on the No. 4 (4.75 mm) sieve and above.

41. 406.03 COMPOSITION OF MIXTURE, part (f) Boxed Samples, is hereby corrected by adding the word "Engineer" to the end of the second (last) sentence.

42. 406.05 BITUMINOUS MIXING PLANT AND TESTING, part (a) Requirements for All Plants, subpart (12) Testing Facilities, is hereby modified by adding the following as the fourth paragraph:

The laboratory shall be equipped with a monitoring system readout that provides real-time access to active Agency project(s) production status. The system shall accumulate and provide the following information via digital display: Project name and number, truck number, ticket number, product description, and accumulated project daily quantity and load quantity accurate to the nearest metric ton (ton). The display shall be continually updated by the plant's recording system. Waivers may be considered for plants with production capacities not capable of exceeding 150 metric tons (tons) per hour.

43. 406.16 SURFACE TOLERANCE, is hereby modified by adding the phrase ", with the exception of all limited access highway on and off ramps," after the phrase "miscellaneous mix" in the second (last) sentence of the sixth (last) paragraph.

SECTION 490 - SUPERPAVE BITUMINOUS CONCRETE PAVEMENT

44. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby modified by deleting the fourth row (for "Dust Proportion") in its entirety and replacing it with the following:

Dust Proportion (Filler/Asphalt Ratio)	0.60 - 1.20 (Wet Sieve) (Dry Sieve for Production - Types IS and IIS: 0.50 - 1.20 Types IIIS, IVS, and VS: 0.50 - 1.00)

45. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby further modified by deleting the sixth row (for "Voids in Mineral Aggregate") in its entirety and replacing it with the following:

Voids in Mineral Aggregate (VMA)%	12.5 min.	13.5 min.	14.5 min	15.5 min.	16.5 min.	17.5 min.

46. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby still further modified by deleting the ninth row (for "Voids Filled With Asphalt") in its entirety.

47. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby still further modified by deleting footnotes (3), (4), and (5) in their entirety.

48. 490.03 COMPOSTION OF MIXTURE, part (b) Design Criteria, is hereby modified by deleting the heading "Voids Filled With Asphalt (VFA)" and the equation "VFA = 100 x ((VMA - V_a)/VMA)" in the second paragraph.

49. 490.03 COMPOSITION OF MIXTURE, part (c) Mix Design, is hereby modified by deleting the phrase ", and a single percentage for VFA" in the first sentence of the third paragraph.

50. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03C - PRODUCTION TESTING TOLERANCES is hereby modified by deleting the seventh (last) row (for "VFA") in its entirety.

51. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03C - PRODUCTION TESTING TOLERANCES is hereby further modified by deleting footnote 2 in its entirety.

52. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby modified by deleting footnote designation "(1)" after "Cold Feed Gradation" in the fourth row.

53. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby further modified by adding the following as the fifth row:

Cold Feed % Fractured Face & Thin and Elongated Particles(1)	Day of initial paving and 1 per week(4)	ASTM D5821 ASTM D4791

54. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03D - MINIMUM QUALITY CONTROL GUIDELINES, is hereby still further modified by deleting footnote 1 in its entirety and replacing it as follows:

1 - "Fractured faces" (for gravel sources only). "Thin and elongated" of particles retained on the No. 4 (4.75 mm) sieve and above.

55. 490.05 BITUMINOUS MIXING PLANT AND TESTING, part (a) Requirements for All Plants, subpart (12) Testing Facilities, is hereby modified by adding the following as the third paragraph:

The laboratory shall be equipped with a monitoring system readout that provides real-time access to active Agency project(s) production status. The system shall accumulate and provide the following information via digital display: Project name and number, truck number, ticket number, product description, and accumulated project daily quantity and load quantity accurate to the nearest metric ton (ton). The display shall be continually updated by the plant's recording system. Waivers may be considered for plants with production capacities not capable of exceeding 150 metric tons (tons) per hour.

56. 490.14 COMPACTION, part (c) Coring Protocol, is hereby corrected by deleting text "0" and replacing it with text ")" in the first sentence of the seventh paragraph.

57. 490.16 SURFACE TOLERANCE, is hereby modified by adding the phrase ", with the exception of all limited access highway on and off ramps," after the phrase "miscellaneous mix" in the second (last) sentence of the sixth (last) paragraph.

SECTION 501 – HPC STRUCTURAL CONCRETE

58. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (Metric), is hereby modified by deleting the fourth column (with header "Max. Slump (mm)") in its entirety and replacing it with the following:

Max.[7] Slump (mm)

N/A
---

59. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (Metric), is hereby further modified by adding the following footnote:

[7] The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 200 mm, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

60. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby modified by deleting the fourth column (with header "Max. Slump (in)") in its entirety and replacing it with the following:

Max.[7] Slump (mm)

N/A
---

61. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby corrected by deleting text "700 mm" and replacing it with text "28 inches" in footnote 4.

62. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby further modified by adding the following footnote:

[7] The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 8 inches, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

63. 501.03 CLASSIFICATION AND PROPORTIONING, ninth paragraph (beginning "A minimum of thirty (30)..."), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence.

64. 501.11 DEPOSITING CONCRETE UNDERWATER, part (a) General, subpart (1), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence of the second paragraph.

SECTION 505 - PILING

65. 505.09 BASIS OF PAYMENT, is hereby modified by adding the following pay item:

Pay Item	Pay Unit
505.12 Steel Piling, HP 250 x 85 (HP 10 x 57)	Meter (Linear Foot)

SECTION 506 - STRUCTURAL STEEL

66. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby modified by deleting the tenth paragraph (Beginning "Bolts shall be tightened…") in its entirety and replacing it with the following:

    Bolts shall be tightened to develop a tension not less than 5 percent in excess of the minimum bolt tension specified in Table 506.19A. Bolts shall not be tightened to more than the maximum tension specified in Table 506.19A.

67. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby further modified by deleting subparts (1) Calibrated Wrench Method, (2) Turn of the Nut Method, and (3) Torque Method in their entirety.

68. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, subpart (4) Tension Control Assembly Method, is hereby modified by being re-designated as part (1).

69. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, subpart (5) Direct Tension Indicator Method, is hereby modified by being re-designated as part (2).

70. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby still further modified by deleting TABLE 506.19B (including associated paragraphs) in its entirety.

71. 506.19 BOLTING AND CONNECTIONS, part (d) Acceptance of Bolt Tensioning, is hereby modified by deleting the second and third sentences of the first paragraph.

72. 506.19 BOLTING AND CONNECTIONS, part (d) Acceptance of Bolt Tensioning, is hereby further modified by deleting the fourth, fifth, ninth, eleventh, and twelfth paragraphs in their entirety.

SECTION 507 - REINFORCING STEEL

73. 507.01 DESCRIPTION, is hereby modified by adding the phrase "of the level specified" after the phrase "bar reinforcement".

74. 507.01 DESCRIPTION, is hereby further modified by adding the following paragraphs:

    Levels and associated types of reinforcing steel are specified as follows:

    (a) Level I (Limited Corrosion Resistance). Level I reinforcing includes plain, low alloy, and epoxy coated reinforcing steel.

    (b) Level II (Improved Corrosion Resistance). Level II reinforcing includes stainless clad and dual-coated reinforcing steel.

    (c) Level III (Exceptional Corrosion Resistance). Level III reinforcing includes solid stainless reinforcing steel.

    The location, level, and when specified, type of reinforcing shall be as indicated in the Plans. Reinforcing supplied shall meet the requirements of the level specified or any higher level. Only one type of reinforcing steel shall be used for each level for the Contract work, unless permitted in writing by the Engineer.

75. 507.02 MATERIALS, is hereby modified by deleting the sixth (final) entry in the Subsection listing.

76. 507.03 FABRICATION AND SHIPMENT, part (a) General, is hereby modified by adding the phrase "deformed bar" after the phrase "shall be" in the first paragraph.

77. 507.03 FABRICATION AND SHIPMENT, part (a) General, is hereby corrected by deleting punctuation ".." and replacing it with punctuation "." at the end of the first paragraph.

78. 507.04 PROTECTION OF MATERIAL, is hereby modified by adding the following as the second sentence in the first paragraph:

When multiple levels of reinforcing steel are used on a project, they shall be stored separately, including during transport in order that there is no direct contact between the bars.

79. 507.04 PROTECTION OF MATERIAL, is hereby further modified by deleting the phrase "The epoxy coating" and replacing it with the word "Coatings" in the third sentence of the third paragraph.

80. 507.04 PROTECTION OF MATERIAL, is hereby still further modified by deleting the phrase "as required for damaged areas" and replacing it with the phrase "per the coating manufacturer's recommendations and to the satisfaction of the Engineer" in the third sentence of the fifth (last) paragraph.

81. 507.04 PROTECTION OF MATERIAL, is hereby still further modified by adding the following paragraph:

Ends of Level II reinforcing steel where the mild steel is exposed shall be repaired in the following manner:

(a) Cut ends of dual-coated reinforcing steel shall be coated with a two-part epoxy patching material as specified by the coating manufacturer. The materials and procedures shall be approved by the Engineer prior to the repairs being performed.

(b) Cut ends of stainless clad reinforcing steel shall be epoxied and capped in accordance with the manufacturer's recommendations with either stainless steel caps or plastic caps. Caps shall be sealed to prevent the intrusion of moisture.

82. 507.05 PLACING AND FASTENING REINFORCING STEEL, is hereby modified by deleting the sixth paragraph in its entirety and replacing it with the following:

Tie wires and supports used for installation of reinforcement shall be composed of the same material as any steel being contacted or shall be plastic. When forms are to be removed in their entirety, uncoated steel chairs equipped with snug-fitting, high-density, polyethylene tips which provide 3 mm (1/4 inch) clearance between the metal and any exposed surface may be used.

83. 507.10 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase ", Epoxy Coated Reinforcing Steel, and Galvanized Reinforcing Steel" and replacing it with the phrase "of the type and size specified" in the first paragraph.

84. 507.10 METHOD OF MEASUREMENT, is hereby further modified by adding the phrase "of the type specified" at the end of the second paragraph (beginning "The quantity of Drilling and Grouting Dowels…").

85. 507.11 BASIS OF PAYMENT, is hereby modified by deleting the following pay items:

Pay Item	Pay Unit
507.15 Reinforcing Steel	Kilogram (Pound)
507.17 Epoxy Coated Reinforcing Steel	Kilogram (Pound)
507.18 Galvanized Reinforcing Steel	Kilogram (Pound)

86. 507.11 BASIS OF PAYMENT, is hereby further modified by adding the following pay items:

Pay Item	Pay Unit
507.11 Reinforcing Steel, Level I	Kilogram (Pound)
507.12 Reinforcing Steel, Level II	Kilogram (Pound)
507.13 Reinforcing Steel, Level III	Kilogram (Pound)

SECTION 509 - LONGITUDINAL DECK GROOVING

87. 509.03 CONSTRUCTION DETAILS, is hereby modified by deleting the last line of the second paragraph (beginning "Depth: 4 mm…") and replacing it with the following:

Depth: 6 mm (±2 mm)((1/4")(±1/16"))

SECTION 510 - PRESTRESSED CONCRETE

88. 510.12 INSTALLATION, part (a) Prestressed Concrete, subpart (2) Initial Post-tensioning, is hereby modified by deleting the first sentence in its entirety.

SECTION 516 - EXPANSION DEVICES

89. 516.01 DESCRIPTION, is hereby modified by adding the phrase ", or partially removing and modifying," after the word "installing".

90. 516.05A PARTIAL REMOVAL AND MODIFICATION, is hereby made a new Subsection of the Standard Specifications as follows:

516.05A PARTIAL REMOVAL AND MODIFICATION. The Contractor shall partially remove and modify the existing bridge joint at the locations indicated in the Plans and as directed by the Engineer.

Steel for new joint plates shall meet the requirements of Subsection 714.02.

The Contractor shall remove and dispose of existing joint plates, drain troughs, and associated hardware.

The Contractor shall grind existing steel plates and/or shoulder concrete to the configuration shown on the Plans. The final surface shall be to the satisfaction of the Engineer.

91. 516.06 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Partial Removal and Modification of Bridge Joint to be measured for payment will be the number of meters (linear feet) of bridge joint removed and modified in the complete and accepted work, measured along its centerline.

92. 516.07 BASIS OF PAYMENT, is hereby modified by adding the following paragraph and pay item:

The accepted quantity of Partial Removal and Modification of Bridge Joint will be paid for at the Contract unit price per meter (linear foot). Payment will be full compensation for partially removing and modifying the existing joint as specified and as detailed in the Plans, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
516.20 Partial Removal and Modification of Bridge Joint	Meter (Linear Foot)

SECTION 525 - BRIDGE RAILINGS

93. 525.02 MATERIALS, is hereby modified by adding the following as the third entry in the Subsection listing:

Structural Steel.....714.02

94. 525.06 INSTALLATION, part (a) General, is hereby modified by adding the following as the sixth (last) paragraph:

Concrete railing shall receive an aesthetic finish in accordance with Subsection 501.16. Cracks in concrete railing shall be repaired by a method approved by the Engineer. Cracks in concrete greater than 0.25 mm (0.01 inch) may be cause for rejection.

95. 525.08 BASIS OF PAYMENT, is hereby modified by adding the phrase "for furnishing all forms, joint filler, admixtures, trial batches, and connection plates for approach railing terminal connectors; for satisfactory completion of any necessary repairs, surface finishing, and curing;" after the phrase "for all work necessary for verifying and adjusting post height and/or bolt spacing of existing posts;" in the second (last) sentence of the third paragraph.

96. 525.08 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Pay Item	Pay Unit
525.45 Bridge Railing, Galvanized Steel Tubing/ Concrete Combination	Meter (Linear Foot)

SECTION 531 - BRIDGE BEARING DEVICES

97. 531.04 FABRICATION, part (b) Surface Protection, is hereby corrected by deleting punctuation ",." at the end of the paragraph and replacing it with punctuation ".".

SECTION 540 - PRECAST CONCRETE

98. 540.02 MATERIALS, is hereby modified by deleting the fourteenth entry (beginning "Coated Bar Reinforcement…") in the Subsection listing.

99. 540.02 MATERIALS, is hereby further modified by adding the following as the twenty-ninth entry in the Subsection listing:

Sheet Membrane Waterproofing, Preformed Sheet……726.11

100. 540.07 FABRICATION, part (e) Placing Concrete, is hereby modified by deleting the phrase "done with care" and replacing it with the phrase "performed in accordance with Subsection 501.10(f)" in the third (last) sentence.

101. 540.10 INSTALLATION, is hereby modified by adding the following new part (c):

(c) Sheet Membrane Waterproofing. A reinforced asphalt, synthetic resin, or coal-tar based preformed sheet membrane shall be placed over the joints of precast concrete units in accordance with the Contract Documents. All work performed shall be in accordance with the manufacturer's recommendations.

Material for membrane shall meet the requirements of Subsection 726.11.

Waterproofing shall not be performed in wet weather or when the temperature is below 5°C (40°F), without the authorization of the Engineer.

The concrete surfaces that are to be waterproofed shall be reasonably smooth and free from projections or holes and shall be cleaned of dust and loose material. The surfaces shall be visibly dry prior to and during application of the membrane system.

102. 540.14 BASIS OF PAYMENT, is hereby modified by adding the following paragraph:

Furnishing and placing preformed sheet membrane waterproofing, including primer, mastic, polyurethane membrane sealant, and surface preparation, is considered incidental to the work for Precast Concrete Structure.

SECTION 541 - STRUCTURAL CONCRETE

103. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby modified by deleting footnote designation "*" in the first and fourth entries of the third row (for "Class A" concrete).

104. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby further modified by deleting footnote "*" and associated text (beginning "* When this class of concrete…").

105. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby still further modified by deleting the fourth (with header "Range in Slump (mm)") and fifth (with header "Air Cont. (%)") columns in their entirety and replacing them with the following:

Range* in Slump (mm)	Air Content (%)
---	7.0 ± 1.5
---	7.0 ± 1.5
---	7.0 ± 1.5
---	5.5 ± 1.5
---	5.5 ± 1.5
---	7.0 ± 1.5

106. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby still further modified by adding the following footnote:

* The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 200 mm, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

107. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric) is hereby still further modified by adding the following as the eighth (bottom) row with the included footnotes:

Controlled Density (Flowable) Fill	To be designed ***	To be designed ****	To be designed *****	10 min.	704.01 (Fine Aggregate)	0.85 max. ******	---

*** A mineral admixture may be used to replace a portion of the cement.

**** The minimum amount of water shall be used to produce the desirable flow for the intended use without showing segregation.

***** The slump (flowability) shall be such that material is able to completely fill the voids or area as needed without segregation.

******A minimum of 3 cylinders per test age required to constitute a test. If average strength at 28 days exceeds 115% of max. strength, then payment for Contract item 541.45 will be 85% of the Contract bid price.

108. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby modified by deleting footnote designation "*" in the first and fourth entries of the third row (for "Class A" concrete).

109. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby further modified by deleting footnote "*" and associated text (beginning "* When this class of concrete…").

110. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby still further modified by deleting the fourth (with header "Range in Slump (in.)") and fifth (with header "Air Cont. (%)") columns in their entirety and replacing them with the following:

Range* in Slump (mm)	Air Content (%)
---	7.0 ± 1.5
---	7.0 ± 1.5
---	7.0 ± 1.5
---	5.5 ± 1.5
---	5.5 ± 1.5
---	7.0 ± 1.5

111. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby still further modified by adding the following footnote:

* The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 8 inches, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

112. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English) is hereby modified by adding the following as the eighth (bottom) row with the included footnotes:

Controlled Density (Flowable) Fill	To be designed ***	To be designed ****	To be designed *****	10 min.	704.01 (Fine Aggregate)	125 max. ******	---

*** A mineral admixture may be used to replace a portion of the cement.

**** The minimum amount of water shall be used to produce the desirable flow for the intended use without showing segregation.

***** The slump (flowability) shall be such that material is able to completely fill the voids or area as needed without segregation.

******A minimum of 3 cylinders per test age required to constitute a test. If average strength at 28 days exceeds 115% of max. strength, then payment for Contract item 541.45 will be 85% of the Contract bid price.

113. 541.10 PLACING CONCRETE, part (c) Placement Limitations, is hereby modified by adding the following paragraphs:

Flowable fill shall be applied to voids and other locations as specified in the Contract Documents and as directed by the Engineer. Flowable fill shall be able to completely fill the existing voids.

If voids are discovered, the Engineer may direct the Contractor to submit a plan for filling the remaining voids. This work, including preparing and submitting the plan and filling any remaining voids, will be at the Contractor's expense.

114. 541.11 DEPOSITING CONCRETE UNDERWATER, part (a) General, subpart (1), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence of the second paragraph.

115. 541.19 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase "or LW" and replacing it with the phrase "LW, or Flowable Fill" in the first sentence of the first paragraph.

116. 541.20 BASIS OF PAYMENT, is hereby modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
541.45 Controlled Density (Flowable) Fill	Cubic Meter (Cubic Yard)

SECTION 580 - STRUCTURAL CONCRETE REPAIR

117. 580.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

Polymer Concrete Repair Material.....780.05

118. 580.03 PROPORTIONING AND MIXING, is hereby modified by deleting the last sentence of the first paragraph in its entirety and replacing it with the following:

The product shall not be extended with sand or gravel, except for Rapid Setting Concrete Repair Material with Coarse Aggregate and Polymer Concrete Repair Material when mixed with approved aggregates in conformance with the manufacturer's recommendations.

119. 580.04 SURFACE PREPARATION FOR REPAIRS, OVERLAYS AND MEMBRANES, is hereby modified by adding the word "abrasive" after the phrase "shall be" and before the phrase "blast cleaned" in the first sentence of the third paragraph.

120. 580.04 SURFACE PREPARATION FOR REPAIRS, OVERLAYS AND MEMBRANES, is hereby further modified by adding the phrase ", or Polymer Concrete Repair Material," after the word "Aggregate" in the sixth paragraph.

121. 580.08 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase "and not for new patches, which will be the responsibility of the Contractor" and replacing it with the phrase ", with no deductions made for areas of new patches" in the second sentence of the ninth paragraph.

122. 580.08 METHOD OF MEASUREMENT, is hereby further modified by adding the phrase ", and Polymer Concrete Repair Material" after the word "Aggregate" in the first sentence of the tenth paragraph.

123. 580.09 BASIS OF PAYMENT, is hereby modified by adding the phrase ", and Polymer Concrete Repair Material" after the word "Aggregate" in the seventh paragraph.

124. 580.09 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
580.21 Polymer Concrete Repair Material	Cubic Meter (Cubic Yard)

SECTION 601 - CULVERTS AND STORM DRAINS

125. 601.02 MATERIALS, is hereby modified by adding the following as the sixth entry in the Subsection listing:

Corrugated Polypropylene Pipe.....710.07

126. 601.07 JOINING PIPE, is hereby modified by adding the following new part (d) as follows:

(d) Corrugated Polypropylene Pipe. Corrugated Polypropylene pipe shall be joined by a system designed and approved by the pipe manufacturer. Couplings and fittings shall provide sufficient longitudinal strength to preserve pipe alignment and prevent separation at the joints.

127. 601.11 BASIS OF PAYMENT, is hereby modified by changing the end of the pay item number range for CPEP Elbow from 601.5999 to 601.5899.

128. 601.11 BASIS OF PAYMENT, is hereby further modified by adding the following pay items:

Payment will be made under:

Pay Item	Pay Unit
601.2800 to 601.2999 CPPP(SL)	Meter (Linear Foot)
601.5900 to 601.5999 CPPP Elbow	Each
601.7100 to 601.7199 CPPPES	Each

SECTION 608 - EQUIPMENT RENTAL

129. 608.02 GENERAL REQUIREMENTS, is hereby modified by adding the following new part (i):

(i) Truck-Mounted Attenuator, Advanced Warning Vehicle/Protection Vehicle (AWV/PV). Truck-Mounted Attenuator, AWV/PV shall consist of a Truck-Mounted Attenuator meeting the requirements of Subsection 608.02(h) and be equipped with a Changeable Message Sign in accordance with the MUTCD. The Changeable Message Sign shall be mounted so as to be clearly visible to the traveling public and shall be capable of being controlled from inside the cab of the vehicle, with capable controls including but not limited to turning the sign on and off, changing between preset messages, and inserting new messages when approved by the Engineer. Phases of signing shall have the ability to change automatically when required.

130. 608.04 BASIS OF PAYMENT, is hereby modified by changing the word "item" to "items" and by adding the phrase "and Truck-Mounted Attenuator, AWV/PV" after the phrase "Truck-Mounted Attenuator" in the second (last) paragraph.

131. 608.04 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
608.50 Truck-Mounted Attenuator, AWV/PV	Hour

SECTION 613 - STONE FILL, RIPRAP, AND SLOPE PAVING

132. 613.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

Rock Fill for Gabions.....706.06
Gabion Baskets.....712.04

133. 613.04 PLACING, is hereby modified by adding the following new part (d):

(d) Rock Fill for Gabions. The furnishing and installing of gabion baskets shall be performed in accordance with the manufacturer's recommendations.

The Contractor should expect to perform some manual stone placement to minimize voids and to create a neat, flat vertical surface of gabions.

134. 613.05 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Gabion Wall to be measured for payment will be the number of cubic meters (cubic yards) of Rock Fill for Gabions placed in the complete and accepted work.

135. 613.06 BASIS OF PAYMENT, is hereby modified by adding the phrase "and Gabion Wall" after the word "specified" in the first sentence of the first paragraph.

136. 613.06 BASIS OF PAYMENT, is hereby modified by adding the phrase ", including gabion baskets," after the word "material" in the third (last) sentence of the first paragraph.

137. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the phrase "or rock" after the word "stone" in the first sentence of the second paragraph.

138. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the following paragraph:

Geotextile fabric and bedding material for Gabion Wall will be paid for under the appropriate Contract items.

139. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
613.25 Gabion Wall	Cubic Meter (Cubic Yard)

SECTION 616 - CURBS AND GUTTERS

140. 616.05 REPOINTING GRANITE BRIDGE CURB, is hereby made a new Subsection of the Standard Specifications as follows:

616.05 REPOINTING GRANITE BRIDGE CURB. The existing mortar bed and vertical curb joints shall be repointed as shown on the Plans. Mortar shall meet the requirements of Subsection 707.01.

141. 616.14 METHOD OF MEASUREMENT, is hereby modified by adding the following as the second paragraph:

The quantity of Repointing Granite Bridge Curb to be measured for payment will be the number of liters (gallons) of mortar applied in the completed and accepted work, measured to the nearest liter (gallon).

142. 616.14 METHOD OF MEASUREMENT, is hereby corrected by changing the word "portland" to "Portland" in the fifth (last) paragraph.

143. 616.15 BASIS OF PAYMENT, is hereby modified by adding the following as the second paragraph:

The accepted quantity of Repointing Granite Bridge Curb will be paid for at the Contract unit price per liter (gallon). Payment will be full compensation for furnishing, transporting, handling, and placing the material specified and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

144. 616.15 BASIS OF PAYMENT, is hereby corrected by changing the word "portland" to "Portland" in the fourth paragraph.

145. 616.15 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
616.225 Repointing Granite Bridge Curb	Liter (Gallon)

SECTION 621 - TRAFFIC BARRIERS

146. 621.01 DESCRIPTION, is hereby modified by adding the phrase "repairing," after the phrase "removing,".

147. 621.02 MATERIALS, is hereby modified by adding the following as the fifth entry in the Subsection listing:

Wire Rope or Cable.....713.03

148. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby modified by deleting the phrase "post assemblies and panel units" and replacing it with the phrase "guardrail components" in the second sentence of the first paragraph.

149. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby further modified by deleting the first sentence of the second paragraph in its entirety and replacing it with the following:

Those sections in which height over an extensive portion of the section is greater than 760 mm (30 inches) or less than 675 mm (26 ½ inches) shall be adjusted to a nominal height of 735 mm ±25 mm (29 inches ± 1 inch).

150. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GUARDRAIL OR GUIDE POSTS, is hereby still further modified by deleting the phrase "post assembly replacement or guardrail beam replacement occur" and replacing it with the phrase "guardrail component replacement occurs" in the fourth paragraph.

151. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby still further modified by adding the following as the sixth and seventh paragraphs:

Offset blocks designated for replacement shall be replaced in-kind. Materials shall be in conformance with the applicable requirements of Subsection 728.01 for either wood, steel, or alternative blockouts.

Cable guardrail repair shall be performed in accordance with VTrans Standard Drawing G-6 and as directed by the Engineer.

152. 621.14 METHOD OF MEASUREMENT, is hereby modified by adding the following as the fourth and fifth paragraphs of the Subsection text:

The quantities of Cable Guardrail J-Bolt, Galvanized and Cable Guardrail Splice Unit to be measured for payment will be the number of units installed in the complete and accepted work.

The quantity of Replacement of Guardrail Cable to be measured for payment will be the number of meters (linear feet) installed in the complete and accepted work.

153. 621.14 METHOD OF MEASUREMENT, is hereby further modified by adding the following as the sixth paragraph of the Subsection text:

The quantities of Steel Beam Guardrail Delineator and Steel Beam Guardrail Offset Block to be measured for payment will be the number of each component replaced in the complete and accepted work.

154. 621.15 BASIS OF PAYMENT, is hereby modified by adding the following as the second, third, and fourth paragraphs of the Subsection text:

The accepted quantities of Cable Guardrail J-Bolt, Galvanized and Cable Guardrail Splice Unit will be paid for at the Contract unit price for each.

The accepted quantity of Replacement of Cable Guardrail will be paid for at the Contract unit price per meter (linear foot).

The accepted quantities of Steel Beam Guardrail Delineator and Steel Beam Guardrail Offset Block will be paid for at the Contract unit price for each.

155. 621.15 BASIS OF PAYMENT, is hereby further modified by adding the phrase "removing and disposing of damaged guardrail component(s)," after the phrase "specified," in the first sentence of the seventh paragraph.

156. 621.15 BASIS OF PAYMENT, is hereby still further modified by adding the following pay items:

Payment will be made under:

Pay Item		Pay Unit
621.173	Cable Guardrail J-Bolt, Galvanized	Each
621.174	Cable Guardrail Splice Unit	Each
621.175	Replacement of Guardrail Cable	Meter (Linear Foot)
621.218	Steel Beam Guardrail Delineator	Each
621.219	Steel Beam Guardrail Offset Block	Each
621.70	Guardrail Approach Section, Galvanized Type I	Each
621.71	Guardrail Approach Section, Galvanized Type II	Each
621.726	Guardrail Approach Section, Galvanized 3 Rail Box Beam w/Curb	Each
621.735	Guardrail Approach Section, Steel Beam	Each
621.736	Guardrail Approach Section, Steel Beam w/2.4 m (8 feet) Posts	Each
621.737	Guardrail Approach Section, Galvanized HD Steel Beam	Each
621.738	Guardrail Approach Section, Galvanized HD Steel Beam w/2.4 m (8 feet) Posts	Each
621.748	Guardrail Approach Section to Concrete Combination Bridge Railing, TL-3	Each

SECTION 630 - UNIFORMED TRAFFIC OFFICERS AND FLAGGERS

157. 630.03 CLOTHING AND EQUIPMENT, part (b) For Flaggers, subpart (1), is hereby modified by replacing the phrase "ANSI 107-1999" with the phrase "ANSI 107-2004" in the first sentence.

158. 630.03 CLOTHING AND EQUIPMENT, part (d) For All Traffic Control Personnel, subpart (2), is hereby modified by deleting the word "The" and replacing it with the phrase "When deemed necessary by the Engineer, or when noted in the Plans, the" at the beginning of the first sentence.

SECTION 641 - TRAFFIC CONTROL

159. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby modified by adding the phrase "implement that plan or" after the phrase "the Contractor may" in the first sentence of the fourth paragraph.

160. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby further modified by adding the following as the second sentence of the fourth paragraph:

When the Contractor will implement an Agency-designed traffic control plan, written certification shall be submitted to the Engineer indicating that traffic control will be performed in accordance with the Agency design.

161. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby still further modified by changing the word "This" to the word "An" in the second sentence of the fourth paragraph.

162. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby still further modified by adding the following paragraph:

When the Contract Documents specify that a site-specific traffic control plan be submitted by the Contractor, Construction Drawings shall be submitted in accordance with Section 105. The submitted site-specific plan shall include, for each phase of construction requiring a significant change in temporary traffic control, a narrative description of the proposed temporary traffic control for each phase (including pedestrian accommodations where appropriate) and the major work activities to be completed in each phase; and a layout for each phase of construction showing existing lane configurations, existing traffic control devices (signs, signals, and pavement markings), driveways, ramps, and highway intersections, and the location of all proposed temporary traffic control devices, flaggers, and UTO's. All pertinent dimensions, such as taper lengths, sign spacing, temporary lane widths, and distance(s) from existing traffic control devices shall be labeled.

163. 641.03 TRAFFIC CONTROL DEVICES, is hereby modified by deleting the phrase "have three (3) lines of eight (8) characters per line and conform to Section 6F.55 of the MUTCD" and replacing it with the phrase "be used with a maximum of two phases, each consisting of a maximum of 3 lines of 8 characters" in the sixth paragraph.

164. 641.03 TRAFFIC CONTROL DEVICES, is hereby further modified by deleting the phrase "requirements in Section 6F.56 of" and replacing it with the phrase "Portable Arrow Board requirements in" in the seventh paragraph.

SECTION 646 - RETROREFLECTIVE PAVEMENT MARKINGS

165. 646.02 MATERIALS, is hereby modified by deleting the Subsection listing in its entirety and replacing it with the following:

Polyurea Pavement Markings.....708.08(a)
Low VOC Chlorinated Rubber Traffic Paint.....708.08(b)
Low VOC Acetone Based Traffic Paint.....708.08(b)
Epoxy Paint.....708.08(c)
Waterborne Traffic Paint.....708.08(d)
Methyl-methacrylate Paint.....708.08(e)
Glass Beads.....708.09(a)
Premium Optics.....708.09(b)
Wet Recoverable and Wet Reflective Optics.....708.09(c)
Thermoplastic Pavement Markings, Type A.....708.10(a)
Thermoplastic Pavement Markings, Type B.....708.10(b)
Raised Pavement Markers, Type I.....708.11
Pavement Marking Tape, Type A.....708.12(a)
Pavement Marking Tape, Type B.....708.12(b)
Pavement Marking Tape, Type C.....708.12(c)
Pavement Marking Tape, Type D.....708.12(d)
Line Striping Targets.....708.13(a)
Raised Pavement Markers, Type II.....708.13(b)
Temporary Pavement Marking Tape.....708.13(c)
Pavement Marking Mask.....708.13(d)

166. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby modified by deleting the first paragraph in its entirety.

167. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby further modified by deleting the seventh paragraph in its entirety.

168. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by deleting the word "interim" and replacing it with the phrase "permanent or temporary" in the first sentence of the eighth paragraph.

169. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by adding the phrase "edgeline," after the phrase "centerlines," in the first sentence of the eighth paragraph.

170. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by deleting the ninth paragraph in its entirety.

171. 646.04 APPLICATION OF MARKINGS, GENERAL, part (c) Weather Limitations, subpart (2), is hereby modified by being deleted in its entirety and replaced as follows:

(2) At the time of application of durable pavement markings, the pavement surface and ambient air temperatures shall be as per the manufacturer's published specified application temperatures, and the dew point shall be 5°F or more below the ambient air temperature. If the manufacturer's published recommendations are unavailable, the pavement surface and ambient air temperatures shall be a minimum of 10°C (50°F).

172. 646.04 APPLICATION OF MARKINGS, GENERAL, part (c) Weather Limitations, subpart (3), is hereby modified by being the word "October" and replacing it with the word "November".

173. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (1) Centerline Markings, is hereby modified by deleting the number "100" and replacing it with the phrase "the same width as the lines" in the fourth sentence of the first paragraph.

174. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (1) Centerline Markings, is hereby further modified by deleting the second (last) paragraph in its entirety.

175. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (2) Edgeline Markings, is hereby modified by deleting the second (last) paragraph in its entirety.

176. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (3) Dotted Line, is hereby modified by deleting the second (last) paragraph in its entirety.

177. 646.06 PAINT PAVEMENT MARKINGS, is hereby modified by being re-named WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS.

178. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby modified by changing the word "Retroflective" to "Retroreflective" in the first sentence of the first paragraph.

179. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby further modified by deleting the phrase "shall have a dry film thickness of 380 ±25 µm (15 ±1 mil) for paint, unless otherwise specified, and" in the third (last) sentence of the first paragraph.

180. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby still further modified by adding the following as the third paragraph:

The markings shall be applied at a rate to create a uniform wet film thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon) with glass beads applied at a rate of 960 grams per liter (8.0 lb per gallon) of paint. The Contractor shall provide the Engineer and the Materials Section with the optic drop on rates of all optic materials and daily binder application rates.

181. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby still further modified by deleting the fourth and fifth (last) paragraphs in their entirety.

182. 646.07 DURABLE PAVEMENT MARKINGS, is hereby modified by adding the following as the third sentence of the first paragraph:

Durable pavement markings shall be installed within two weeks of the placement of the wearing course.

183. 646.07 DURABLE PAVEMENT MARKINGS, is hereby further modified by changing punctuation at the end of the third sentence of the first paragraph from ":" to ".".

184. 646.07 DURABLE PAVEMENT MARKINGS, is hereby still further modified by adding the following at the end of the first paragraph:

The Contractor shall select optics that conform with Subsections 708.09(a), 708.09(b), and 708.09(c). The Contractor shall provide the Engineer and the Materials Section with the daily optic drop on rates of all optic materials and daily binder application rates. The Contractor shall perform all quality control activities and provide to the Engineer on a daily basis all retroreflectivity measurements collected. The Agency will perform all acceptance testing activities. The Engineer will select an evaluation section(s) for the purpose of collecting pavement marking retroreflectivity measurements. Retroreflectivity measurements shall be performed in accordance with ASTM D7585, as modified by Table 646.07A.

TABLE 646.07A – EVALUATION SECTION CRITERIA

PAVEMENT MARKING TYPE	EVALUATION SECTION(S) REQUIRED*	EVALUATION SECTION LENGTH m (feet)	MEASUREMENTS REQUIRED
Long Lines	1 per 3.2 km (2 miles)	120 (400)	20
Dashed Lines	1 per 3.2 km (2 miles)	120 (400)	20 (2 per dashed line)

*Projects less than 3.2 km (2 miles) in length shall have a minimum of one (1) evaluation section.

Each spot measurement for all yellow centerline retroreflectivity shall be performed in both directions at each spot location and averaged for acceptance. For long lines and dashed lines, if the average retroreflectivity as determined in accordance with ASTM D7585 fails to meet the minimum retroreflectivity requirements, or if 25% of the individual tests fail to meet the minimum retroreflectivity requirements, the entire length represented by the evaluation section shall be re-marked and re-tested until in compliance, at no additional cost to the Agency.

185. 646.07 DURABLE PAVEMENT MARKINGS, part (a) Pavement Marking Tape, Type I, is hereby modified by being deleted in its entirety and replaced as follows:

(a) Pavement Marking Tape, Type A. Type A tape for pavement markings is classified as high performance or high durable, and non-removable. Type A tape shall conform to the requirements of Subsection 708.12(a).

Type A tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

186. 646.07 DURABLE PAVEMENT MARKINGS, part (b) Epoxy Paint, is hereby modified by being re-designated as part (e).

187. 646.07 DURABLE PAVEMENT MARKINGS, part (c) Thermoplastic, is hereby modified by being re-designated as part (f) Extruded Thermoplastic.

188. 646.07 DURABLE PAVEMENT MARKINGS, part (d) Polyurea Paint, is hereby modified by being re-designated as part (h).

189. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Methyl-methacrylate Paint, is hereby modified by being re-designated as part (i).

190. 646.07 DURABLE PAVEMENT MARKINGS, is hereby further modified by adding the following new parts (b), (c), and (d):

(b) Pavement Marking Tape, Type B. Type B tape for pavement markings is classified as non-removable, used in long line applications. Type B tape shall conform to the requirements of Subsection 708.12(b).

Type B tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

(c) Pavement Marking Tape, Type C. Type C tape for pavement markings is classified as non-removable, used in intersection applications. Type C tape shall conform to the requirements of Subsection 708.12(c).

Type C tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements.

(d) Pavement Marking Tape, Type D. Type D tape for pavement markings is classified as non-removable, used for symbols and legends applications. Type D tape shall conform to the requirements of Subsection 708.12(d).

Type D tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

191. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Epoxy Paint, is hereby modified by deleting the fifth (last) sentence in its entirety.

192. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Epoxy Paint, is hereby further modified by adding the following sentences:

Epoxy paint shall be applied at a rate to create a uniform wet film in place thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon). Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

193. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, is hereby modified by replacing the phrase "708.10" with the phrase "708.10(a)" at the end of the first paragraph.

194. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, is hereby further modified by adding the following as the third paragraph:

Thermoplastic markings shall be applied at a rate to create a uniform hot film in place thickness of 2667 µm (105 mils) with an allowable range of ± 127 µm (±5 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 0.36 square meters per liter (15 square feet per gallon).

195. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (1) Thermoplastic Application Equipment, a. Mobile Applicator Equipment, is hereby modified by deleting the phrase ", between 2.4 and 2.5 mm (96 and 100 mils) thick" and replacing it with the phrase "with a uniform hot film in place thickness of 2667 µm (105 mils), with an allowable range of ± 127 µm (±5 mils)" in the second sentence of the second paragraph.

196. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (1) Thermoplastic Application Equipment, b. Portable Applicator Equipment, is hereby modified by deleting the phrase "between 2 and 2.5 mm (80 and 100 mils) thick" and replacing it with the phrase "with a uniform hot film in place thickness of 2667 µm (105 mils) with an allowable range of ± 127 µm (±5 mils)" in the fourth sentence.

197. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, b. Thermoplastic Composition, is hereby modified by replacing the phrase "708.10" with the phrase "708.10(a)".

198. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, d. Extruded Markings, is hereby modified by deleting the phrase "thickness between 2.4 and 2.5 mm (96 and 100 mils)" and replacing it with the phrase "uniform hot film in place thickness between 2.54 and 2.794 mm (100 and 110 mils)".

199. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Beads, is hereby modified by being re-named Optics.

200. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby modified by adding the phrase "shall be" after the phrase "Type I".

201. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby further modified by adding the phrase "intermix of the" after the phrase "incorporated into the".

202. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby still further modified by deleting the numbers "28" and "30" and replacing them with the numbers "30" and "40", respectively.

203. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 2., is hereby modified by being deleted in its entirety and replaced as follows:

> 2. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

204. 646.07 DURABLE PAVEMENT MARKINGS, is hereby still further modified by adding the following new part (g):

(g) Preformed Thermoplastic. Approved preformed thermoplastic marking materials shall be one of the preformed thermoplastic markings listed on the Approved Products List on file with the Agency's Research and Development Section under Subsection 708.10(b).

205. 646.07 DURABLE PAVEMENT MARKINGS, part (h) Polyurea Paint, is hereby modified by deleting the second sentence in its entirety.

206. 646.07 DURABLE PAVEMENT MARKINGS, part (h) Polyurea Paint, is hereby further modified by adding the following sentences:

Polyurea paint shall be applied at a rate to create a uniform wet film in place thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon). Initial dry retroreflectivity minimums for surface-applied polyurea shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings. Initial dry retroreflectivity minimums for recessed polyurea shall be 600 mcdl/lx/m^2 for yellow markings and 800 mcdl/lx/m^2 for white markings.

207. 646.07 DURABLE PAVEMENT MARKINGS, part (i) Methyl-methacrylate Paint, is hereby modified by deleting the second sentence in its entirety.

208. 646.07 DURABLE PAVEMENT MARKINGS, part (i) Methyl-methacrylate Paint, is hereby further modified by adding new subpart (1) as follows:

(1) Application Requirements.

a. Spray Applied Markings. All spray applied markings shall be applied at a rate to create a uniform wet film in place thickness of 762 µm (30 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.4 square meters per liter (55 square feet per gallon). Initial dry retroreflectivity minimums for surface spray applied methyl-methacrylate shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings. Initial dry retroreflectivity minimums for recessed methyl-methacrylate shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

b. Extruded Markings. All extruded markings shall be applied at a rate to create a uniform wet film in place thickness of 2286 µm (90 mils) with an allowable range of ±127 µm (±5 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 0.45 square meters per liter (18.3 square feet per gallon). Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

c. Structured Markings. All structured markings shall be applied at a rate to create a uniform wet film in place thickness as per the manufacturer's recommendations unless otherwise specified in the Contract Documents. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

209. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby modified by deleting the phrase "Type II" (first entry) and replacing it with the phrase "Temporary Pavement Marking" in the first sentence.

210. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Pavement Marking Tape, Type II, is hereby modified by being re-named Temporary Pavement Marking Tape.

211. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Temporary Pavement Marking Tape, is hereby modified by deleting the first sentence in its entirety and replacing it as follows:

This tape for pavement markings is classified as temporary and is removable.

212. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Temporary Pavement Marking Tape, second sentence, is hereby modified by deleting the phrase "Type II" and replacing it with the word "The" and by deleting the phrase "Subsection 708.12(b)" and replacing it with the phrase "Subsection 708.13(c)".

213. 646.08 TEMPORARY PAVEMENT MARKINGS, part (b) Pavement Marking Mask, is hereby modified by deleting the phrase "Subsection 708.12(c)" and replacing it with the phrase "Subsection 708.13(d)" in the second sentence.

214. 646.08 TEMPORARY PAVEMENT MARKINGS, part (c) Raised Pavement Markers, Type II, is hereby modified by adding the following sentence to the second (last) paragraph:

They shall conform to the requirements of Subsection 708.13(b) and shall be installed in accordance with the manufacturer's requirements.

215. 646.08 TEMPORARY PAVEMENT MARKINGS, part (d) Line Striping Targets, is hereby modified by being deleted in its entirety and replaced as follows:

(d) Line Striping Targets. Line striping targets are intended to be substitutes for pavement markings for not longer than 14 calendar days. Line striping targets shall be maintained and replaced as needed or as directed by the Engineer, until replaced by a temporary or permanent pavement marking.

Line striping targets of the color shown on the Plans or directed by the Engineer shall be installed as described below or as directed by the Engineer.

For solid longitudinal pavement markings, line striping targets shall be placed at 3 m (10 foot) intervals. For double centerline markings, line striping targets shall be paired. For dashed pavement markings, line striping targets shall be placed in groups of 3 spaced at 1.5 m (5 feet), with the groups separated by 10 m (30 foot) spaces, or as determined by the Engineer.

Line striping targets shall not be used to delineate passing zones on two lane non-divided highways.

Line striping targets shall conform to the requirements of Subsection 708.13(a) and shall be installed in accordance with the manufacturer's requirements.

216. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby further modified by deleting the first sentence of the last paragraph in its entirety and replacing it as follows:

Temporary markings on the wearing course of pavement that remain in place for fewer than fourteen calendar days shall be Temporary Pavement Marking Tape, Type II raised pavement markers, or line striping targets.

217. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby still further modified by deleting the word "seven" and replacing it with the word "fourteen" in the second (last) sentence of the last paragraph.

218. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby modified by deleting the phrase "provided is 125% of the material marking thickness" and replacing it with the phrase "meets the requirements of Table 646.09A" in the first sentence.

219. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby further modified by deleting the last sentence in its entirety.

220. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby still further modified by adding the following paragraphs and Table:

The bottom of the recess shall have a smooth, flat finished surface. The use of gang stacked Diamond cutting blades is required for asphalt pavement surfaces. The spacers between blade cuts shall be such that there will be less than a 254 µm (10 mil) rise in the finished groove between the blades.

Recesses shall be clean, dry, and free of laitance, oil, dirt, grease, paint, or other foreign contaminants prior to application of the pavement markings. The Contractor shall re-clean grooves, as necessary, prior to application of any primer or permanent markings. Depth plates shall be provided by the Contractor to assure that desired groove depth is achieved.

TABLE 646.09A - PAVEMENT MARKING RECESS DEPTH

MARKING MATERIAL	STANDARD GLASS BEAD RECESS DEPTH µm (mils)	PREMIUM OPTIC RECESS DEPTH µm (mils)
Permanent Waterborne Paint	762-1016 (30-40)	762-1016 (30-40)
Spray Applied Methyl-methacrylate	1016-1270 (40-50)	1778-2286 (70-90)
Extruded Methyl-methacrylate	2540-2794 (100-110)	2540-2794 (100-110)*
Structured Methyl-methacrylate	As recommended by manufacturer	As recommended by manufacturer*
Thermoplastic	2540-2794 (100-110)	2540-2794 (100-110)*
Polyurea	762-1270 (30-50)	1778-2286 (70-90)
Epoxy	762-1270 (30-50)	1778-2286 (70-90)
Permanent Tape	As recommended by manufacturer	As recommended by manufacturer
*Thermoplastic and Methyl-methacrylate with wet recoverable or wet reflective elements shall have a recess depth of 3048-3302 µm (120-130 mils).		

221. 646.14 BASIS OF PAYMENT, part (a) Paint Pavement Markings, is hereby modified by adding the following pay item ranges:

646.200 to 646.209 100 mm (4 inch) White Line	Meter (Linear Foot)
646.2110 to 646.2119 100 mm (4 inch) Yellow Line	Meter (Linear Foot)
646.2140 to 646.2149 150 mm (6 inch) White Line	Meter (Linear Foot)
646.2150 to 646.2159 150 mm (6 inch) Yellow Line	Meter (Linear Foot)
646.221 to 646.229 200 mm (8 inch) White Line	Meter (Linear Foot)
646.231 to 646.239 200 mm (8 inch) Yellow Line	Meter (Linear Foot)
646.241 to 646.249 300 mm (12 inch) White Line	Meter (Linear Foot)
646.251 to 646.259 300 mm (12 inch) Yellow Line	Meter (Linear Foot)
646.261 to 646.269 600 mm (24 inch) Stop Bar	Meter (Linear Foot)
646.300 to 646.309 Letter or Symbol	Each
646.311 to 646.319 Crosswalk Marking	Meter (Linear Foot)
646.321 to 646.329 Railroad Crossing Symbol	Each

SECTION 653 - EROSION PREVENTION AND SEDIMENT CONTROL MEASURES

222. 653.15 BIOTECHNICAL SLOPE PROTECTION, part (a) Erosion Logs, is hereby modified by being deleted in its entirety and replaced with the following:

(a) Erosion Logs. Erosion logs shall be installed to intercept water flow and collect sediment and associated pollutants by settling and filtering. Erosion logs may be placed over bare or mulched soils or rolled erosion control products; around inlet and outlets; as check dams in unvegetated ditches, slope interrupters on steep slopes, and perimeter control; and along stream banks as a base for plantings. Some types of erosion logs (typically those with a heavier filtering medium such as compost) can be used in applications where underlying conditions are unsuitable (frozen ground, paved surfaces, sensitive plantings areas, etc.) for trenching.

Prior to placing erosion logs, the ground surface shall be properly graded and compacted and free of depressions or obstructions such as tree roots, protruding stones, or other foreign matter.

Erosion logs shall be installed in accordance with the manufacturer's installation guidelines, staking pattern guide, and details based upon the intended use on the construction site.

The Contractor shall remove accumulated sediment when it has reached 1/2 of the effective height of the log, or as directed by the Engineer. Alternatively, a new erosion log may be placed on top of and slightly behind the original one creating more sediment storage capacity. Erosion logs shall be maintained until disturbed area above the device has been permanently stabilized and construction activity has ceased.

When used as a temporary erosion prevention and sediment control measure, erosion logs may be cut open and left in place, but only if the fill material and netting are 100% biodegradable and the material is spread or graded flat so as to not cause concentration of future surface runoff.

SECTION 656 - PLANTING TREES, SHRUBS, AND VINES

223. 656.02 MATERIALS, is hereby modified by deleting the first entry in the Subsection listing (for "Barrier Fence") in its entirety.

224. 656.02 MATERIALS, is hereby further modified by adding the following as the second paragraph (directly below the Subsection listing):

Barrier Fence shall meet the requirements of Section 653.

SECTION 677 - OVERHEAD TRAFFIC SIGN SUPPORTS

225. 677.01 DESCRIPTION, is hereby modified by adding the phrase "and removing and disposing of existing overhead traffic sign supports," after the phrase "supports,".

226. 677.03 GENERAL, is hereby modified by adding the following paragraph:

Where existing overhead traffic sign supports are to be removed, the Contractor shall remove and dispose of the entire sign assembly, including concrete footings, to a depth of 450 mm (18 inches) below existing grade. Areas of ground disturbance shall be restored to the satisfaction of the Engineer.

227. 677.05 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Remove Existing Overhead Sign Assembly of the type specified to be measured for payment will be the number of each assembly removed in the complete and accepted work.

228. 677.06 BASIS OF PAYMENT, is hereby modified by adding the following paragraphs and pay items:

The accepted quantity of Remove Existing Overhead Sign Assembly of the type specified will be paid for at the Contract unit price per each. Payment will be full compensation for removing and disposing of assembly components, including concrete footings; for performing any excavation necessary; for restoring areas of ground disturbance; and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Costs associated with providing traffic control and/or flaggers for performing the work will be paid under the appropriate Contract item(s).

Payment will be made under:

Pay Item	Pay Unit
677.30 Remove Existing Overhead Sign Assembly, Cantilever	Each
677.35 Remove Existing Overhead Sign Assembly, Multi-Support	Each

SECTION 678 - TRAFFIC CONTROL SIGNALS

229. 678.01 DESCRIPTION, is hereby modified by adding the phrase ", and removing existing traffic control systems" after the word "system" in the first paragraph.

230. 678.02 MATERIALS, is hereby corrected by deleting "convers" and replacing it with the word "covers" in the second sentence of the last paragraph of the Subsection text.

231. 678.07 - DETECTORS AND CONTROLLERS, is hereby corrected by deleting "maufacturer" and replacing it with the word "manufacturer" in the first sentence of the second (last) paragraph.

232. 678.11 INSTALLATION, sixteenth paragraph, part (a), is hereby modified by adding the following:

The Contractor shall remove any equipment to be salvaged or reused in such a manner that the equipment is not damaged.

233. 678.13 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Removal of Existing Traffic Control Signal System to be measured for payment will be for each traffic control signal system removed in the complete and accepted work.

234. 678.14 BASIS OF PAYMENT, is hereby modified by adding the phrase "all removal, disposal, and salvage and/or reuse of existing system equipment and components," after the phrase "Electrical Wiring," in the second sentence of the first paragraph.

235. 678.14 BASIS OF PAYMENT, is hereby further modified by adding the following paragraph and pay item:

The accepted quantity of Removal of Existing Traffic Control Signal System will be paid for at the Contract unit price per each. Payment will be full compensation for removing and handling the existing traffic control signal system components as specified in the Contract Documents and for furnishing all labor, materials, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
678.45 Removal of Existing Traffic Control Signal System	Each

SECTION 700 GENERAL

236. 700.01 GENERAL STATEMENT, is hereby corrected by deleting punctuation ".," at the end of the first sentence of the fourth paragraph and replacing it with punctuation ".".

237. 700.02 MATERIALS CERTIFICATIONS, part (a) General, is hereby modified by deleting subpart (3) in its entirety.

238. 700.02 MATERIALS CERTIFICATIONS, part (a) General, is hereby further modified by adding the following as the seventh paragraph:

All certifications shall be forwarded to the Vermont Agency of Transportation Materials Section.

SECTION 702 - BITUMINOUS MATERIALS

239. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby modified by adding the abbreviation "(PGB)" after the word "binder" in the first sentence.

240. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby further modified by deleting the second sentence of the first paragraph in its entirety and replacing it with the following:

PGB shall be asphalt prepared solely by the refining of crude petroleum and shall meet the requirements of AASHTO M 320 from facilities compliant with AASHTO R 29 without the addition of modifiers.

241. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby still further modified by adding the following as the third and fourth (last) sentences of the second paragraph:

If additives are used for the modification of asphalt, preapproval is required. The addition of any material not normally obtained during the initial refining process shall constitute modified asphalt and shall be labeled appropriately.

242. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby still further modified by adding the following as the third (last) paragraph:

The performance graded binder shall be manufactured in accordance with the approved Quality Control Plan. The manufacturer shall remain in compliance with the plan, including all notifications, sampling, testing, and reporting requirements.

243. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (b) Pretest, is hereby modified by being re-designated as part (c).

244. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (c) Certification, is hereby modified by being re-designated as part (d).

245. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), is hereby modified by adding the following new part (b):

(b) Effect of Approval. VTrans reserves its right to remove its approval of any PGB lot if, in the sole discretion of the Agency, such approval was based on a material non-disclosure by the PGB supplier.

SECTION 704 - AGGREGATES

246. 704.10 AGGREGATE FOR BITUMINOUS CONCRETE PAVEMENT, part (a) Aggregate for Marshall Bituminous Concrete Pavement, subpart (1) Grading, c. Recycled Asphalt Pavement (RAP), is hereby modified by deleting the word "four" and replacing it with the word "two" in the seventh sentence of the fifth paragraph.

247. 704.10 AGGREGATE FOR BITUMINOUS CONCRETE PAVEMENT, part (b) Aggregate for Superpave Bituminous Concrete Pavement, subpart (1) Grading, c. Recycled Asphalt Pavement (RAP), is hereby modified by deleting the word "four" and replacing it with the word "two" in the seventh sentence of the sixth paragraph.

SECTION 708 - PAINTS, STAINS, AND TRAFFIC MARKING MATERIALS

248. 708.01 GENERAL REQUIREMENTS, part (c) Sampling, Testing, and Certification, subpart (2) Testing, is hereby modified by adding the following:

All other materials may be required to be tested on a cold weather AASHTO National Transportation Product Evaluation Program (NTPEP) pavement marking test deck.

249. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, is hereby modified by adding the following as the first paragraph:

Ready-mixed Low VOC Chlorinated Rubber Traffic Paint shall consist of 100% chlorinated rubber type, fast drying traffic paint that shall contain properly formulated pigment and vehicle to give the desired results.

250. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (1) Materials, is hereby modified by adding the following new subpart d.:

d. The paint shall contain a maximum of 0.005% w/w (50 ppm w/w) lead. The EPA Method 1311 (TCLP) extract of the paint shall not contain amounts of cadmium, mercury, hexavalent chromium, or other toxic heavy metals in excess of the limits specified in SW-846.

251. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby modified by deleting the phrase "and shall be a 100% acrylic binder" in the first sentence.

252. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby further modified by deleting the phrase "Table 708.08A" and replacing it with the phrase "the following:" in the second (last) sentence.

253. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby still further modified by deleting TABLE 708.08A in its entirety and replacing it with the following:

TABLE 708.08A – LOW VOC CHLORINATED RUBBER TRAFFIC PAINT COMPOSITION

PERFORMANCE CHARACTERISTIC	WHITE	YELLOW/BLUE/ GREEN
Pigment Content, % by Mass (Weight) (ASTM D3723)	55% min. 59% max.	55% min 59% max.
Vehicle Content, % by Mass (Weight)	38% min. 42% max.	38% min. 42% max.
VOC Content, Mass (Weight) per Unit Volume (ASTM D3960)	150 g/L (1.25 lb/gal) max.	150 g/L (1.25 lb/gal) max.
Lead Content, %	0.005% max.	0.005% max.
Yellow Pigment	N/A	Yellow #65 or #75
Titanium Dioxide, Rutile Type II, (ASTM D1394)	120 g/L (1.00 lb/gal) max.	25 g/L (0.21 lb/gal) max.
Total Non-Volatile Content, % by Mass (Weight) (ASTM D2369)	70.0% min.	69.0% min.
Density, (ASTM D1475)	1.50 ± 0.04 kg/L (12.5 ± 0.33) lb/gal	1.46 ± 0.04 kg/L (12.2 +/- 0.33 lb/gal)
Close Cup Flash Point (ASTM D 3278)	4°C (39 °F) min.	4°C (39°F) min.

TABLE 708.08B - LOW VOC ACETONE BASED TRAFFIC PAINT COMPOSITION

PERFORMANCE CHARACTERISTIC	WHITE	YELLOW/BLUE/ GREEN
Pigment Content, % by Mass (Weight) (ASTM D3723)	53% min. 57% max.	51% min 56% max.
Vehicle Content, % by Mass (Weight)	37% min. 42% max.	37% min. 42% max.
VOC Content, Mass (Weight) per Unit Volume (ASTM D3960)	150 g/L (1.25 lb/gal) max.	150 g/L (1.25 lb/gal) max.
Lead Content, %	0.005% max.	0.005% max.
Yellow Pigment	N/A	Yellow #65 or #75
Titanium Dioxide, Rutile Type II, (ASTM D1394)	120 g/L (1.00 lb/gal) max.	25 g/L (0.21 lb/gal) max.
Total Non-Volatile Content, % by Mass (Weight) (ASTM D2369)	70.0% min.	69.0% min.
Density, (ASTM D1475)	1.415 ± 0.04 kg/L (11.8 ± 0.33) lb/gal	1.367 ± 0.04 kg/L (11.4 +/- 0.33 lb/gal)
Close Cup Flash Point (ASTM D 3278)	-20°C (-4°F) min.	-20°C (-4°F) min.

254. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (3) Laboratory Tests, subpart a. Viscosity, is hereby modified by being deleted in its entirety and replaced as follows:

a. Viscosity.

1. Chlorinated Rubber Traffic Paint. The paint viscosity shall not be less than 74 nor more than 90 Krebs units at 25°C (77°F) when tested according to ASTM D562.

2. Acetone Based Traffic Paint. The paint viscosity shall not be less than 70 nor more than 88 Krebs units at 25°C (77°F) when tested according to ASTM D562.

255. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (4) Sampling and Testing, subpart a. Sampling Size, is hereby modified by deleting the phrase "per batch of each type and color of traffic paint" and replacing it with the phrase "of each traffic paint per batch," in the first sentence.

256. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (4) Sampling and Testing, subpart c. Sample Delivery, is hereby modified by deleting the first paragraph in its entirety and replacing it as follows:

> All samples shall be delivered to the Materials Engineer, Vermont Agency of Transportation, Materials Section, 2178 Airport Road Unit B, Berlin, Vermont 05641.

257. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (3) Laboratory Tests, d. Drying Time (No Pick Up Time), is hereby modified by deleting the phrase "380 microns" and replacing it with the phrase "381 µm".

258. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (3) Laboratory Tests, e. No Track Time (Field Test), is hereby modified by deleting the phrase "508 microns" and replacing it with the phrase "508 µm" in the second sentence.

259. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (4) Sampling and Testing, c. Sample Delivery, is hereby corrected by deleting the phrase "1716 Barre-Montpelier Road, Berlin, VT 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the first paragraph.

260. 708.09 GLASS BEADS, is hereby modified by being re-named OPTICS.

261. 708.09 OPTICS, is hereby modified by adding new part (a) heading Glass Beads.

262. 708.09 OPTICS, part (a) Properties, is hereby modified by being re-designated as subpart (1) under part (a) heading Glass Beads.

263. 708.09 OPTICS, part (b) Certification, is hereby modified by being re-designated as subpart (2) under part (a) heading Glass Beads.

264. 708.09 OPTICS, is hereby further modified by adding the following new parts (b) and (c):

(b) Premium Optics. Approved premium optics shall be one of the premium optics listed on the Approved Products List on file with the Agency's Research and Development Section.

(c) Wet Recoverable and Wet Reflective Optics. Approved wet recoverable and wet reflective optics shall be one of the wet recoverable and wet reflective optics listed on the Approved Products List on file with the Agency's Research and Development Section.

265. 708.10 THERMOPLASTIC PAVEMENT MARKINGS, is hereby modified by being deleted in its entirety and replaced as follows:

708.10 THERMOPLASTIC PAVEMENT MARKINGS.

(a) Thermoplastic Pavement Markings, Type A. Type A Thermoplastic Pavement Markings shall be one of the Thermoplastic Pavement Markings on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in long line applications or as specified in the Contract Documents. Thermoplastic composition shall comply with Table 708.10A.

TABLE 708.10A - THERMOPLASTIC PAVEMENT MARKING COMPOSITION
(by mass (weight)

Binder	18% Minimum
Filler	40% Maximum
Glass Beads	30 ±5-40%

(b) Thermoplastic Pavement Markings, Type B. Type B Thermoplastic Pavement Markings shall be one of the Preformed Thermoplastic Pavement Markings on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in intersection applications for legends, stopbars, or symbols or as specified in the Contract Documents.

266. 708.11 RAISED PAVEMENT MARKERS, is hereby modified by being re-named RAISED PAVEMENT MARKERS, TYPE I.

267. 708.12 PAVEMENT MARKING TAPE, is hereby modified by deleting parts (a) Pavement Marking Tape, Type I, (b) Pavement Marking Tape, Type II, and (c) Pavement Marking Mask in their entirety and replacing them as follows:

(a) Pavement Marking Tape, Type A. Type A Pavement Marking Tape shall be one of the non-removable permanent pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section that exhibit high adhesion, high durability, and high retroreflectivity. These markings shall be used in high AADT locations in long line applications as specified in the Contract Documents.

(b) Pavement Marking Tape, Type B. Type B Pavement Marking Tape shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in lower AADT locations in long line applications as specified in the Contract Documents.

(c) Pavement Marking Tape, Type C. Type C Pavement Marking Tape shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used at intersection locations only as specified in the Contract Documents.

268. 708.12 PAVEMENT MARKING TAPE, is hereby further modified by adding the following new part (d):

(d) Pavement Marking Tape, Type D. Type D Pavement Marking Tape for legends and symbols shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used for preformed traffic markings made of the same material as that of an approved permanent Type A, B, or C tape.

269. 708.13 PREFORMED TRAFFIC MARKINGS AND SYMBOLS, is hereby modified by being deleted in its entirety and replaced as follows:

708.13 TEMPORARY DELINEATION SYSTEMS.

(a) Line Striping Targets. Line Striping Targets shall be one of the Line Striping Targets on the Approved Products List on file with the Agency's Research and Development Section.

(b) Raised Pavement Markers, Type II. Acceptable Raised Pavement Markers shall be one of the Raised Pavement Markers on the Approved Products List on file with the Agency's Research and Development Section.

(c) Temporary Pavement Marking Tape. Pavement Marking Tape shall be one of the removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section.

(d) Pavement Marking Mask. Pavement Marking Mask shall be one of the Masking Marking Tapes on the Approved Products List on file with the Agency's Research and Development Section.

270. 708.14 LINE STRIPING TARGETS, is hereby modified by being deleted in its entirety.

SECTION 710 - CULVERTS, STROM DRAINS, AND SEWER PIPES, NONMETAL

271. 710.03 CORRUGATED POLYETHYLENE PIPE, is hereby modified by adding the following as the last sentence:

In order to maintain approval status, polyethylene pipe manufacturers must participate in, and maintain compliance with, the AASHTO National Transportation Product Evaluation Program (NTPEP), which audits producers of the pipe.

272. 710.07 CORRUGATED POLYPROPYLENE PIPE, is hereby made a new Subsection of the Standard Specifications as follows:

273. 710.07 CORRUGATED POLYPROPYLENE PIPE. Corrugated polypropylene pipe and fittings shall conform to the latest revisions of AASHTO M 330, Type S. Acceptable corrugated polypropylene pipe shall be one of the corrugated polypropylene pipe products on the Approved Products List on file with the Agency's Materials and Research Section. In order to maintain approval status, polypropylene pipe manufacturers must participate in, and maintain compliance with, the AASHTO National Transportation Product Evaluation Program (NTPEP), which audits producers of the pipe.

SECTION 712 - CRIBBING MATERIALS

274. 712.04 GABION BASKETS, part (a) Wire for Gabion Baskets, is hereby modified by changing the word "shall" to the word "may" and by adding the phrase "or welded panels" after the phrase "woven wire mesh" in the first sentence of the first paragraph.

275. 712.04 GABION BASKETS, part (a) Wire for Gabion Baskets, is hereby further modified by adding the following as the third sentence of the first paragraph:

Welded panels shall be coated by hot dip galvanizing after fabrication.

276. 712.04 GABION BASKETS, part (b) PVC Coating for Gabion Baskets, is hereby modified by adding the following new subpart (7):

(7) Punch Test. The mesh shall achieve satisfactory performance on the Punch Test, as described in ASTM A975 13.1.4. This requirement applies to both woven and welded gabion baskets.

SECTION 713 - REINFORCING STEEL, WELDED WIRE REINFORCEMENT, AND REINFORCING STRAND

277. 713.01 BAR REINFORCEMENT, is hereby modified by deleting the phrase "conforming to AASHTO M 31M/M 31, including supplementary requirements" and replacing it with the phrase ", unless otherwise specified in the Contract Documents" in the first paragraph.

278. 713.01 BAR REINFORCEMENT, is hereby further modified by adding the following new parts (a)-(f) and associated paragraphs:

(a) Plain Reinforcing Steel. Plain reinforcing steel shall conform to AASHTO M 31M/M 31, including supplementary requirements.

(b) Low Alloy Reinforcing Steel. Low alloy reinforcing steel shall conform to ASTM A 706/A 706M.

(c) Epoxy Coated Reinforcing Steel. Epoxy coated reinforcing steel shall have an electrostatically applied organic epoxy protective coating, which has been prequalified, fabricated, tested, and installed in accordance with AASHTO M 284M/M 284.

(d) Stainless Clad Reinforcing Steel. Stainless clad reinforcing steel shall meet the requirements of AASHTO M 329M/M 329.

(e) Dual-Coated Reinforcing Steel. Dual-coated reinforcing steel shall meet the requirements of ASTM A 1055/A 1055M.

(f) Solid Stainless Reinforcing Steel. Solid stainless reinforcing steel shall meet the requirements of ASTM A 955/A 955M with one of the following UNS designations: S24100, S30400, S31603, S31653, S32101, S32201, S32205, or S32304. Different designations shall not be mixed within the same project.

Where no core steel requirements are specified in the above specifications, the steel core of the bar reinforcement shall meet the requirements of plain reinforcing steel.

Certification. A Type D Certification shall be furnished in accordance with Subsection 700.02. Certification for Epoxy Coated Reinforcing Steel shall include the coating and coating process.

279. 713.07 COATED BAR REINFORCEMENT, is hereby modified by being deleted in its entirety.

280. 713.02 MECHANICAL SPLICES FOR BAR REINFORCEMENT, is hereby modified by adding the phrase ", except that epoxy coated mechanical splices shall be allowed when Level II reinforcing steel is required" after the phrase "intended to splice" in the second sentence of the first paragraph.

SECTION 714 - STRUCTURAL STEEL

281. 714.08 ANCHOR BOLTS, BEARING DEVICES, is hereby corrected by deleting ".F" and replacing it with "F" in the first sentence of the first paragraph.

282. 714.08 ANCHOR BOLTS, BEARING DEVICES, is hereby further corrected by deleting punctuation "." and replacing it with punctuation "." at the end of the second sentence of the first paragraph.

SECTION 726 - PROTECTIVE COATINGS AND WATERPROOFING MATERIALS

283. 726.10 CONCRETE STAINING AND SEALING SYSTEMS, is hereby made a new Subsection of the Standard Specifications as follows:

726.10 CONCRETE STAINING AND SEALING SYSTEMS. Approved Concrete Staining and Sealing Systems shall be one of the Concrete Staining and Sealing Systems on the Approved Products List on file with the Agency's Materials and Research Section.

284. 726.11 SHEET MEMBRANE WATERPROOFING, PREFORMED SHEET, is hereby made a new Subsection of the Standard Specifications as follows:

726.11 SHEET MEMBRANE WATERPROOFING, PREFORMED SHEET. Approved Preformed Sheet Membrane Waterproofing Systems shall be one of the Preformed Sheet Membrane Waterproofing Systems on the Approved Products List on file with the Agency's Materials and Research Section.

SECTION 731 - BEARING PADS FOR STRUCTURES

285. 731.03 ELASTOMERIC MATERIAL, is hereby modified by deleting the second and third paragraphs in their entirety and replacing them with the following:

Unless noted otherwise, elastomer shall have a design hardness of 50 points and a design shear modulus of 0.8 MPa (110 psi).

Testing of elastomeric material shall be waived for bearings that will be encased in concrete in the final work. All other bearings shall be tested in accordance with the following table:

TABLE 731.03A - REQUIRED TESTS

Material Property	Test Method	Required Result
Hardness	ASTM D 2240	design hardness +/- 5 points
	or	
Shear Modulus	ASTM D 412 with AASTHO M 251 Section 8.8.4	design shear modulus +/- 15%
Low Temperature Brittleness	ASTM D 746 Procedure B	Pass Grade 4 test
Shear Bond Strength	AASHTO M 251 Annex A2 or Appendix X2	Pass
Min Tensile Strength	ASTM D 412	15.6 MPa (2250 psi)
Min Ultimate Elongation	ASTM D 412	(650 - 5 X design hardness)%

SECTION 755 - LANDSCAPING MATERIALS

286. 755.17 EROSION LOGS, is hereby modified by being deleted in its entirety and replaced with the following:

Erosion logs are available in varying diameters. The Contractor shall follow the manufacturer's recommendations for the material type and size based on the intended use.

Erosion logs shall be composed of weed-seed-free coir, straw, excelsior, compost, or other biodegradable filtering medium encased in a photo-degradable and/or biodegradable netting or mesh.

Netting shall have openings of 13 to 25 mm (1/2 to 1 inch), with the exception of compost filled logs which should be 3 to 10 mm (1/8 to 3/8 inch) or as recommended by the manufacturer and accepted by the Engineer.

Anchors for erosion logs shall be wooden stakes, U-shaped wire or earth anchors, or rebar stakes; the size and length shall be as recommended by the manufacturer.

Compost shall meet the requirements of Table 755.05A, with the exception that particle size shall be 99% < 50 mm (2 inches) and maximum 30% < 10 mm (3/8 inch).

SECTION 780 - CONCRETE REPAIR MATERIALS

287. 780.05 POLYMER CONCRETE REPAIR MATERIAL, is hereby made a new Subsection of the Standard Specifications as follows:

780.05 POLYMER CONCRETE REPAIR MATERIAL. Approved Polymer Concrete Repair Materials shall be one of the Polymer Concrete Repair Materials on the Approved Products List on file with the Agency's Materials and Research Section.

ATTACHMENT C: STANDARD STATE PROVISIONS
FOR CONTRACTS AND GRANTS

1. **Entire Agreement:** This Agreement, whether in the form of a Contract, State Funded Grant, or Federally Funded Grant, represents the entire agreement between the parties on the subject matter. All prior agreements, representations, statements, negotiations, and understandings shall have no effect.

2. **Applicable Law:** This Agreement will be governed by the laws of the State of Vermont.

3. **Definitions:** For purposes of this Attachment, "Party" shall mean the Contractor, Grantee or Subrecipient, with whom the State of Vermont is executing this Agreement and consistent with the form of the Agreement.

4. **Appropriations:** If this Agreement extends into more than one fiscal year of the State (July 1 to June 30), and if appropriations are insufficient to support this Agreement, the State may cancel at the end of the fiscal year, or otherwise upon the expiration of existing appropriation authority. In the case that this Agreement is a Grant that is funded in whole or in part by federal funds, and in the event federal funds become unavailable or reduced, the State may suspend or cancel this Grant immediately, and the State shall have no obligation to pay Subrecipient from State revenues.

5. **No Employee Benefits For Party:** The Party understands that the State will not provide any individual retirement benefits, group life insurance, group health and dental insurance, vacation or sick leave, workers compensation or other benefits or services available to State employees, nor will the state withhold any state or federal taxes except as required under applicable tax laws, which shall be determined in advance of execution of the Agreement. The Party understands that all tax returns required by the Internal Revenue Code and the State of Vermont, including but not limited to income, withholding, sales and use, and rooms and meals, must be filed by the Party, and information as to Agreement income will be provided by the State of Vermont to the Internal Revenue Service and the Vermont Department of Taxes.

6. **Independence, Liability:** The Party will act in an independent capacity and not as officers or employees of the State.

   The Party shall defend the State and its officers and employees against all claims or suits arising in whole or in part from any act or omission of the Party or of any agent of the Party. The State shall notify the Party in the event of any such claim or suit, and the Party shall immediately retain counsel and otherwise provide a complete defense against the entire claim or suit.

   After a final judgment or settlement the Party may request recoupment of specific defense costs and may file suit in Washington Superior Court requesting recoupment. The Party shall be entitled to recoup costs only upon a showing that such costs were entirely unrelated to the defense of any claim arising from an act or omission of the Party.

   The Party shall indemnify the State and its officers and employees in the event that the State, its officers or employees become legally obligated to pay any damages or losses arising from any act or omission of the Party.

7. **Insurance:** Before commencing work on this Agreement the Party must provide certificates of insurance to show that the following minimum coverages are in effect. It is the responsibility of the Party to maintain current certificates of insurance on file with the state through the term of the Agreement. No warranty is made that the coverages and limits listed

herein are adequate to cover and protect the interests of the Party for the Party's operations. These are solely minimums that have been established to protect the interests of the State.

Workers Compensation: With respect to all operations performed, the Party shall carry workers' compensation insurance in accordance with the laws of the State of Vermont.

General Liability and Property Damage: With respect to all operations performed under the contract, the Party shall carry general liability insurance having all major divisions of coverage including, but not limited to:

Premises - Operations
Products and Completed Operations
Personal Injury Liability
Contractual Liability

The policy shall be on an occurrence form and limits shall not be less than:

$1,000,000 Per Occurrence
$1,000,000 General Aggregate
$1,000,000 Products/Completed Operations Aggregate
$ 50,000 Fire/ Legal/Liability

Party shall name the State of Vermont and its officers and employees as additional insureds for liability arising out of this Agreement.

Automotive Liability: The Party shall carry automotive liability insurance covering all motor vehicles, including hired and non-owned coverage, used in connection with the Agreement. Limits of coverage shall not be less than: $1,000,000 combined single limit.

Party shall name the State of Vermont and its officers and employees as additional insureds for liability arising out of this Agreement.

8. **Reliance by the State on Representations:** All payments by the State under this Agreement will be made in reliance upon the accuracy of all prior representations by the Party, including but not limited to bills, invoices, progress reports and other proofs of work.

9. **Requirement to Have a Single Audit:** In the case that this Agreement is a Grant that is funded in whole or in part by federal funds, the Subrecipient will complete the Subrecipient Annual Report annually within 45 days after its fiscal year end, informing the State of Vermont whether or not a Single Audit is required for the prior fiscal year. If a Single Audit is required, the Subrecipient will submit a copy of the audit report to the granting Party within 9 months. If a single audit is not required, only the Subrecipient Annual Report is required.

   For fiscal years ending before December 25, 2015, a Single Audit is required if the subrecipient expends $500,000 or more in federal assistance during its fiscal year and must be conducted in accordance with OMB Circular A-133. For fiscal years ending on or after December 25, 2015, a Single Audit is required if the subrecipient expends $750,000 or more in federal assistance during its fiscal year and must be conducted in accordance with 2 CFR Chapter I, Chapter II, Part 200, Subpart F. The Subrecipient Annual Report is required to be submitted within 45 days, whether or not a Single Audit is required.

10. **Records Available for Audit:** The Party shall maintain all records pertaining to performance under this agreement. "Records" means any written or recorded information, regardless of physical form or characteristics, which is produced or acquired by the Party in

the performance of this agreement. Records produced or acquired in a machine readable electronic format shall be maintained in that format. The records described shall be made available at reasonable times during the period of the Agreement and for three years thereafter or for any period required by law for inspection by any authorized representatives of the State or Federal Government. If any litigation, claim, or audit is started before the expiration of the three year period, the records shall be retained until all litigation, claims or audit findings involving the records have been resolved.

11. **Fair Employment Practices and Americans with Disabilities Act**: Party agrees to comply with the requirement of Title 21V.S.A. Chapter 5, Subchapter 6, relating to fair employment practices, to the full extent applicable. Party shall also ensure, to the full extent required by the Americans with Disabilities Act of 1990, as amended, that qualified individuals with disabilities receive equitable access to the services, programs, and activities provided by the Party under this Agreement. Party further agrees to include this provision in all subcontracts.

12. **Set Off**: The State may set off any sums which the Party owes the State against any sums due the Party under this Agreement; provided, however, that any set off of amounts due the State of Vermont as taxes shall be in accordance with the procedures more specifically provided hereinafter.

13. **Taxes Due to the State**:

    a. Party understands and acknowledges responsibility, if applicable, for compliance with State tax laws, including income tax withholding for employees performing services within the State, payment of use tax on property used within the State, corporate and/or personal income tax on income earned within the State.

    b. Party certifies under the pains and penalties of perjury that, as of the date the Agreement is signed, the Party is in good standing with respect to, or in full compliance with, a plan to pay any and all taxes due the State of Vermont.

    c. Party understands that final payment under this Agreement may be withheld if the Commissioner of Taxes determines that the Party is not in good standing with respect to or in full compliance with a plan to pay any and all taxes due to the State of Vermont.

    d. Party also understands the State may set off taxes (and related penalties, interest and fees) due to the State of Vermont, but only if the Party has failed to make an appeal within the time allowed by law, or an appeal has been taken and finally determined and the Party has no further legal recourse to contest the amounts due.

14. **Child Support**: (Applicable if the Party is a natural person, not a corporation or partnership.) Party states that, as of the date the Agreement is signed, he/she:

    a. is not under any obligation to pay child support; or
    b. is under such an obligation and is in good standing with respect to that obligation; or
    c. has agreed to a payment plan with the Vermont Office of Child Support Services and is in full compliance with that plan.

    Party makes this statement with regard to support owed to any and all children residing in Vermont. In addition, if the Party is a resident of Vermont, Party makes this statement with regard to support owed to any and all children residing in any other state or territory of the United States.

15. **Sub-Agreements**: Party shall not assign, subcontract or subgrant the performance of this Agreement or any portion thereof to any other Party without the prior written approval of the State. Party also agrees to include in all subcontract or subgrant agreements a tax certification in accordance with paragraph 13 above.

16. **No Gifts or Gratuities**: Party shall not give title or possession of any thing of substantial value (including property, currency, travel and/or education programs) to any officer or employee of the State during the term of this Agreement.

17. **Copies**: All written reports prepared under this Agreement will be printed using both sides of the paper.

18. **Certification Regarding Debarment:** Party certifies under pains and penalties of perjury that, as of the date that this Agreement is signed, neither Party nor Party's principals (officers, directors, owners, or partners) are presently debarred, suspended, proposed for debarment, declared ineligible or excluded from participation in federal programs, or programs supported in whole or in part by federal funds.

    Party further certifies under pains and penalties of perjury that, as of the date that this Agreement is signed, Party is not presently debarred, suspended, nor named on the State's debarment list at: http://bgs.vermont.gov/purchasing/debarment

19. **Certification Regarding Use of State Funds:** In the case that Party is an employer and this Agreement is a State Funded Grant in excess of $1,001, Party certifies that none of these State funds will be used to interfere with or restrain the exercise of Party's employee's rights with respect to unionization.

20. **Internal Controls:** In the case that this Agreement is an award that is funded in whole or in part by Federal funds, in accordance with 2 CFR Part II, §200.303, the Party must establish and maintain effective internal control over the Federal award to provide reasonable assurance that the Party is managing the Federal award in compliance with Federal statutes, regulations, and the terms and conditions of the award. These internal controls should be in compliance with guidance in "Standards for Internal Control in the Federal Government" issued by the Comptroller General of the United States and the "Internal Control Integrated Framework", issued by the Committee of Sponsoring Organizations of the Treadway Commission (COSO).

21. **Mandatory Disclosures:** In the case that this Agreement is an award funded in whole or in part by Federal funds, in accordance with 2CFR Part II, §200.113, Party must disclose, in a timely manner, in writing to the State, all violations of Federal criminal law involving fraud, bribery, or gratuity violations potentially affecting the Federal award. Failure to make required disclosures may result in the imposition of sanctions which may include disallowance of costs incurred, withholding of payments, termination of the Agreement, suspension/debarment, etc.

22. **Conflict of Interest:** Party must disclose in writing any potential conflict of interest in accordance with Uniform Guidance §200.112, Bulletin 5 Section X and Bulletin 3.5 Section IV.B.

(End of Standard Provisions)

Special Provisions for: Clarendon BRO 1443(48)

1. LABOR SUPPLY. Available workers for this Contract may be obtained from Manager, Employment & Training, Rutland, VT. The latest edition of the DBE Registry can be obtained from the Office of Civil Rights and Labor's Webpage at the following address: http://vtranscivilrights.vermont.gov/. Contractors that do not have access to the internet may obtain a copy from the Office of Contract Administration upon request.

2. CONTRACT COMPLETION DATE. This Contract shall be completed on or before September 2, 2016.

3. NOTICE TO BIDDERS. U.S. Department of Labor Davis-Bacon wage rates are applicable to this Contract. Copies of the applicable rates are included in this proposal.

   In the included wage rates, the requirements of Executive Order 13658 do not apply to this Contract.

4. CONTACT WITH THE AGENCY. From the time of advertising until the actual bid opening for this Contract, all prospective Contractors, subcontractors, and suppliers shall direct all inquiries related to this project solely to the Agency's Office of Contract Administration at (802) 828-2641. This number may also be accessed via the Agency's TTY/TDD Telecommunications Relay Service at 1-800-253-0191.

   The deadline for submitting inquiries related to this project to the Office of Contract Administration is 4:30 p.m. Eastern Standard Time on October 30, 2015. No exceptions will be made to this requirement.

5. NOTICE TO BIDDERS. The Contractor is hereby notified that in the absence of the Engineer, the Agency's Safety Officer and the Agency's Hazardous Materials and Waste Coordinator shall each have the authority to suspend work when they determine that a serious safety or environmental violation exists on the job site. The period of time work is suspended due to a serious safety or environmental violation will not be justification for an extension of time.

6. STANDARD SPECIFICATIONS. The provisions of the 2011 STANDARD SPECIFICATIONS FOR CONSTRUCTION, as modified herein, shall apply to this Contract.

7. SUPPLEMENTAL SPECIFICATIONS AND CONTRACT REQUIREMENTS. The Contractor's attention is directed to the following specifications and contract requirements included in the Proposal form and effective for this Contract:

Required Contract Provisions for Federal-Aid Construction
Standard Federal EEO Specifications
VT Agency of Transportation Contractor Workforce Reporting Requirements
Workers' Compensation; State Contracts Compliance Requirement
General Special Provisions dated April 7, 2015
Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants
Vermont Minimum Labor & Truck Rates
Disadvantaged Business Enterprise (DBE) Policy Contract Requirements
U.S. Department of Labor Davis-Bacon Wage Rates
Asphalt Price Adjustment Provisions dated April 6, 2010
Stream Alteration Consultation #HD-1-0447 (e-mail) dated June 25, 2014
Army Corps of Engineers Permit #NAE-2014-1203 dated July 23, 2014
Certification for Federal-Aid Contracts
Contractor's EEO Certification Form
Debarment & Non-Collusion Affidavit

8. NOTICE TO BIDDERS - CONTRACT INSURANCE REQUIREMENTS. The Contractor is hereby notified that in the event of a discrepancy between the stated insurance requirements of Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants and those of Subsection 103.04 of the Standard Specifications for Construction, the requirements of Subsection 103.04 of the Standard Specifications for Construction shall govern.

9. NOTICE TO BIDDERS - ADDITIONAL CONTRACT REQUIREMENT. For construction and transportation projects over $250,000.00, a payroll process by which during every pay period the Contractor collects from the subcontractors or independent contractors a list of all workers who were on the jobsite during the pay period, the work performed by those workers on the jobsite, and a daily census of the jobsite. This information, including confirmation that Contractors, subcontractors, and independent contractors have the appropriate workers' compensation coverage for all workers at the jobsite, and similar information for the subcontractors regarding their subcontractors shall also be provided to the Department of Labor and to the Department of Banking, Insurance, Securities, and Health Care Administration, upon request, and shall be available to the public.

10. NOTICE TO BIDDERS - RE-DESIGNATION OF VTRANS OFFICIALS. The Contractor is hereby notified of the following re-designation of VTrans officials as referenced in the Contract Documents:

Where in the Contract Documents it reads:	It shall be read as and shall mean:
Director of Program Development	Chief Engineer
Assistant Director of Program Development	Deputy Chief Engineer
Roadway, Traffic, and Safety Engineer; Roadway Program Manager; Highway Safety & Design Engineer; Structures Engineer; Structures Program Manager	Director of Project Delivery Bureau
Chief of Local Transportation Facilities	Director of Municipal Assistance Bureau
Construction Engineer; Materials and Research Engineer	Director of Construction and Materials Bureau
Director of Operations	Director of Maintenance and Operations Bureau

11. NOTICE TO BIDDERS - INCENTIVE/DISINCENTIVE (I/D). The Agency's intent is to have the bridge closure period (BCP) be as short a duration as possible. To encourage the Contractor to provide a maximum effort to complete the Identified Work for I/D within the period as defined below, the Agency is willing to pay an incentive.

(a) Dates. The allowable BCP shall start at 7:00AM and end 28 consecutive calendar days later by 6:59 AM. The duration shall be between June 20, 2016 and August 19, 2016. During the BCP the Contractor will be allowed to work on this bridge 24 hours per day, 7 days per week, including holiday periods.

Night work will be allowed during the BCP. See Special Provision Nos. 12 NOTICE TO BIDDERS - REQUIREMENTS FOR NIGHTTIME WORK and 13 NOTICE TO BIDDERS - NIGHTTIME WORK RESTRICTIONS for additional information and requirements.

Upon any Contractor's receipt of the VAOT Contract award letter, the Contractor shall submit to the VAOT Construction Section for review and approval a certified letter indicating the BEGIN CONSTRUCTION DATE for the BCP work. This letter shall be received by the Construction Section a minimum of twenty one (21) calendar days prior to the BEGIN CONSTRUCTION DATE indicated in the letter. The letter shall indicate the last day of the BCP, the I/D finish date.

The I/D period as established above for this Contract is absolutely fixed and will not be changed for any Act of God, omission, improper action, direction of the Engineer, or any other reason unless done so by the Secretary and only under extreme conditions as determined by the Secretary.

There shall be a pre-closure meeting held on site with the Contractor's Superintendent, Contractor's Project Manager, the Engineer, the Project Manager, the Town of Clarendon, Clarendon Fire Department, Vermont State Police, Rutland County Sheriff, Regional Ambulance Service and Rutland Regional Planning Commission to discuss durations of work, types of night work, work sequencing, etc. The Contractor shall be responsible for setting this meeting up and making appropriate contacts. This meeting shall be held a minimum of 14 days prior to the BCP.

All prefabricated concrete elements shall be authorized for shipment prior to the BCP. The bridge shall remain open to traffic until the prefabricated elements are authorized for shipment.

(b) Identified Work. All work required to open the new Bridge to two-way traffic including:

(1) Wearing Course of pavement placed on approaches and bridge;

(2) Permanent bridge and approach railing installed.

No daily lane closures will be allowed before the 14 days prior to the BCP to progress work items outside EPSC and Traffic Control.

In the 14 days prior to the BCP the contractor will be allowed to maintain a minimum of one-lane (10 feet wide) alternating traffic for Pre-Excavation of Integral Abutment Piles, and pile driving operations during daytime hours.

No night work will be allowed during this 14 day window and two-lane, two-way traffic must be maintained on the existing alignment during nighttime hours.

(c) Pay Schedule. The Contractor will receive a lump sum compensation of Forty-Two Thousand dollars ($42,000) for completing the Identified Work before the end of the I/D period.

In addition, the Contractor will be compensated at a rate of eighty-three ($83) per hour that the Identified Work is completed prior to the end of the I/D period, up to a maximum total payment as specified herein. Only full hours where the new bridge is opened by 6:00 a.m. will count toward this extra incentive payment.

The maximum amount payable under the incentive clause shall be fifty-six thousand dollars ($56,000) (including the lump sum payment).

For each hour after the end of the I/D period that the Identified Work remains uncompleted, the Contractor will be assessed a disincentive at a rate of eighty-three ($83) per hour. The full hourly disincentive amount will be assessed for each hour that traffic is not allowed on the bridge for any portion of the hour. There shall be no maximum on the disincentive amount.

This assessed disincentive is separate from, and will be imposed in addition to, liquidated damages which may be imposed for failure to complete the Contract on time.

(d) Underruns and Overruns. The proposal indicates an estimated quantity for each Contract pay item. The fact that the actual amounts used in the construction of this project may vary from the estimate will not be a basis or cause for changing any of the conditions for I/D.

The Agency recognizes that additional work beyond the work indicated in the Plans, is always possible in any construction contract. The Agency is willing to pay for necessary additional work in accordance with the terms and requirements of the Contract and the Standard Specifications for Construction, however, the Contractor shall absorb any resulting construction time within the original project and CPM Schedules, and there will be no adjustments or changes to the I/D dates or I/D conditions.

(e) Payment. Payment will be made as specified in Section 900.

12. NOTICE TO BIDDERS - REQUIREMENTS FOR NIGHTTIME WORK. The Contractor is hereby notified that night work will be allowed during the bridge closure period.

Night work shall be performed in accordance with the National Cooperative Highway Research Program (NCHRP) Report 476 - "Guidelines for Design and Operation of Nighttime Traffic Control for Highway Maintenance and Construction". A copy of this guideline specification may be downloaded from the following website: http://onlinepubs.trb.org/onlinepubs/nchrp/nchrp_rpt_476.pdf.

Prior to beginning night work, the Contractor shall design a lighting system and present it to the Engineer for approval. The Contractor shall not perform any night work or activities within the project limits until the lighting system has been fully approved and is in place on the project.

The designed lighting system shall be mobile, shall be mounted separately from other construction equipment, shall illuminate the entire work area to daylight intensity with minimal glare, and shall be a surrounding design that minimizes shadows in the work area as much as possible.

All costs associated with the lighting system will be considered incidental to Contract item 900.645 Special Provision (Traffic Control, All-Inclusive).

13. NOTICE TO BIDDERS - NIGHTTIME WORK RESTRICTIONS. The Contractor is hereby notified that during the bridge closure period, no work shall be performed between the hours of 9:00 p.m. and 6:00 a.m. that creates a noise level exceeding 75 decibels. The decibel level shall be measured from the point of activity to the nearest occupied residence.

Construction activities expected to reach this noise threshold include pneumatic hammers, hoe-ram, and similar impact type equipment.

The Contractor shall provide the Engineer, for the duration of the nighttime work, with a sound level meter capable of measuring this noise criteria during the bridge closure period.

Sound level meters shall be Rion NL-20, CESVA SC-160, Extech 407780 or an approved equal capable of meeting IEC60651: 1979 Type 2 and IEC60804: 1985 Type 2 Standards.

The cost for providing this equipment and meeting the specified noise level criteria will not be paid for separately, but will be considered incidental to all other Contract items.

14. NOTICE TO BIDDERS. All temporary construction signs shall meet the following requirements:

A. Where sign installations are not protected by guardrail or other approved traffic barriers, all sign stands and post installations shall meet National Cooperative Highway Research Program (NCHRP) Report 350 or the AASHTO Manual for Assessing Safety Hardware (MASH). The appropriate resource shall be determined as described in the MASH publication. No sign posts shall extend over the top of the sign installed on said post(s). When anchors are installed, stub shall not be greater than 100 mm (4 inches) above existing ground.

B. As a minimum, roll up sign material shall have ASTM D 4956 Type VI fluorescent orange retroreflective sheeting.

C. All post-mounted signs and solid substrate portable signs shall have ASTM D 4956 Type VII, Type VIII, or Type IX fluorescent orange retroreflective sheeting.

D. All retroreflective sheeting on traffic cones, barricades, and drums shall be at a minimum ASTM D 4956 Type III sheeting.

E. All stationary signs shall be mounted on two 4.5 kg/m (3 lb/ft) flanged channel posts or 51 mm (2 inch) square steel inserted in 57 mm (2 ¼") galvanized square steel anchors. No sign posts shall extend over the top edge of signs installed on said posts.

F. Prior to placing temporary work zone signs on the project, the Contractor must furnish for the Engineer's approval a detail for temporary work zone signs on steel posts showing stubs projecting a maximum of 100 mm (4 inches) above ground level and bolts for sign post.

G. Construction signs shall be installed so as to not interfere with nor obstruct the view of existing traffic control devices, stopping sight distance, and corner sight distance from drives and town highways.

H. Speed zones, if used, should be a maximum of 16 kph (10 mph) below existing posted speeds. Temporary speed limit certificates must be approved by the Chief Engineer.

15. NOTICE TO BIDDERS. All retroreflective sheeting on permanent signs (signs to remain after the project is completed) shall be at a minimum ASTM D 4956 Type III sheeting, unless otherwise shown on the Plans.

16. ENVIROMENTAL. The northern long-eared bat (NLEB) is federally listed as a threatened species under the Endangered Species Act effective April 2015. This project shall be subject to Avoidance and Minimization Measures to protect the habitat and hibernacula of this species.

Measures applicable to this project include Time of Year (TOY) restrictions for cutting habitat trees.

Habitat trees have been identified inside of the project limits and are subject to TOY restrictions. The Contractor shall not cut trees >3" in diameter from April 15 through August 31. The Contractor shall schedule removal of trees >3" outside of the restricted time. Should the Contractor propose to cut trees within the restricted timeframe they must first hire a qualified biologist to conduct a suitable habitat assessment and acoustic monitoring as necessary. A report shall be submitted to the VTrans Biologist for review. No cutting in the restricted timeframe shall occur until permission is granted by the VTrans Environmental Section. A bridge inspection will be conducted prior to demolish by the VTrans Environmental section

The Contractor is hereby made aware of the potential for TOY restrictions related to proposed Waste, Borrow and Staging areas. Cutting trees outside of the Contract project limits shall require review under Section 105.25 Control of Waste, Borrow, and Staging Areas.

17. UTILITIES: Existing aerial facilities owned by Green Mountain Power, Telephone Operating Company of Vermont (d/b/a FairPoint Communications), and Comcast Communications will be adjusted, as necessary, by employees or agents of the above companies in accordance with the "Approximate Aerial Utility Relocation Route" shown on the project plans.

Contacts for the above listed utility companies are:

Eric McLellan	Green Mountain Power	(802)747-5563
Andy Rice	FairPoint Communications	(802)747-1074
Steve Marshall	Comcast Communications	(802)776-1626

The Contractor is advised that exploratory excavation to locate existing underground facilities may be necessary to protect these facilities from damage. Where approved by the Engineer, these utilities shall be located and/or exposed by methods such as air/vacuum excavation and/or hand digging to determine their exact location. This exploratory work shall be classified as Trench Excavation of Earth, Exploratory and payment will be made under contract Pay Item 204.22.

Employees or agents of the above listed company(ies) are to be allowed free and full access within the project limits with the tools, materials, and equipment necessary to install, operate, maintain, place, replace, relocate, and remove their facilities.

There will be no extra compensation paid to the Contractor for any inconvenience caused by working around and with the company(ies), or their facilities.

Vermont Statutes Annotated, Title 30, Chapter 86 ("Dig Safe") requires notice to Dig Safe before starting excavation activities. The Contractor must telephone Dig Safe at 811 at least 48 hours (excluding Saturdays, Sundays and legal holidays) before, but not more than 30 days before, starting excavation activities at any location. In addition, before excavation and/or pavement grinding in or on the state highway right-of-way, the Contractor must contact the Agency's District Transportation Administrator, and Local Municipalities to obtain/verify the location of Agency and Municipally owned underground utility facilities or to confirm the absence of such facilities.

Should the Contractor desire additional adjustments of the utility facilities for his/her convenience, proper arrangements shall be made in conformance with Subsection 105.07 of the Standard Specifications for Construction.

All Contractors, subcontractors or material suppliers involved in any project-related activity shall comply with all applicable codes and regulations related to working around live electrical lines; including, but not limited to maintaining the required minimum clear distance from an electrical utility facility . The Contractor's Competent Safety Officer shall be well versed in OSHA and VOSHA regulations, and shall be capable of implementing a plan to conform to these regulations during prosecution of work.

18. HIGHWAY PARKING RESTRICTIONS. Only such trucks and equipment as are necessary for the construction of this project will be permitted to stop or park on the shoulders or right-of-way of the highway. Trucks or equipment stopped or parked shall be at least 1.2 m (4 feet) from the edge of the thru traffic lanes. Parking or stopping on the traveled portion of the roadway will not be permitted unless authorized by the Engineer to meet field conditions.

Private automobiles of workers will not be permitted to stop or park on the shoulders or right-of-way of the highway.

Each of the Contractor's trucks or equipment used for the construction of this project and permitted to park or stop as provided above shall be equipped with flashing light signals on the front and rear and the signals shall be operating at all times when parked or stopped on the highway unless otherwise authorized by the Engineer.

The flashing light signals shall be visibly distinct from and physically separate from the hazard warning system required by Federal and State motor vehicle laws and regulations. At least one of these flashing light signals shall be visible to traffic approaching from any angle at all times.

Qualified traffic control personnel shall be employed whenever the Contractor's vehicles or equipment (including that which belongs to the individual workers) enter or leave the traffic flow. All movement, in or out of the traffic flow, shall be with the flow of traffic.

19. SPECIAL CONSTRUCTION REQUIREMENTS.

A. Unless otherwise permitted in writing by the Engineer, the Contractor shall not work during the holiday periods for Labor Day, Veterans Day, Thanksgiving Day, Memorial Day, and July Fourth. The Engineer shall give a written order designating the time of observance of these holidays and of any additional holidays required by the season, anticipated traffic, and local custom. As specified in Subsection 105.14, construction operations shall not be performed on any Sunday without the specific authorization of the Engineer.

Designated holiday periods shall begin at 12:00 noon on the day before the weekend or holiday, whichever applies, and shall end at 7:00 a.m. on the day after the holiday or the weekend, as appropriate.

B. The Contractor shall maintain a safe access to all drives and intersecting side roads at all times during the construction of this project.

C. Two-way radios shall be provided by the Contractor when requested by the Engineer for use by traffic control personnel. All costs for furnishing and using two-way radios will not be paid for directly, but will be considered incidental to Contract item 900.645 Special Provision (Traffic Control, All-Inclusive).

D. The Contractor shall have available on the project the current editions of the Manual on Uniform Traffic Control Devices (MUTCD) and the Standard Highway Signs and Markings (SHSM) Book. Information for obtaining these publications may be found at: http://mutcd.fhwa.dot.gov/index.htm.

ASPHALT PRICE ADJUSTMENT

20. SUPPLEMENTAL SPECIFICATION - ASPHALT PRICE ADJUSTMENT, dated April 6, 2010, is hereby made a new Subsection of the Specifications, superseding all previous editions and their modifications.

21. SUPPLEMENTAL SPECIFICATION - ASPHALT PRICE ADJUSTMENT, dated April 6, 2010, GENERAL REQUIREMENTS AND CONDITIONS, part (b) text, is hereby modified by being deleted in its entirety and replaced with text "NOT USED".

The index price for asphalt cement is $504 per ton.

In addition to materials produced under Contract pay item(s) as allowed in GENERAL REQUIREMENTS AND CONDITIONS, part (a) of the Supplemental Specification, asphalt cement produced under Contract item 900.680 Special Provision (Bituminous Concrete Pavement, Small Quantity) will be included for adjustment.

If an emulsified asphaltic liquid is used in the Contract work under any Contract item subject to the Asphalt Price Adjustment provisions and that liquid is not included in the table under subpart (5) of PRICE ADJUSTMENT PROCEDURES of the Supplemental Specification, the ACEA as defined in subpart (5) for that liquid will be that as determined by averaging Contractor certified test results for the project.

SECTION 108 - PROSECUTION AND PROGRESS

22. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, is hereby modified by adding new subpart (11) as follows:

(11) The days from April 15th to December 1st, inclusive, on which the weather or condition of the ground caused suspension of the work.

SECTION 501 - HPC STRUCTURAL CONCRETE

23. 501.02 MATERIALS, is hereby modified by adding the following:

Where a shrinkage admixture will be used in placing concrete as allowed by the Contract Documents, the following requirements shall be met:

A shrinkage compensating admixture shall be added during the initial concrete mixing phase or as recommended by the chemical manufacturer product representative. The shrinkage compensating admixture shall be one of the products listed below. The final dosage rate will be determined by the product representative and the concrete producer. The dosage rate volume is computed into the final water/cementitious ratio.

Manufacturer: Sika Construction Product Division
Product name: Sika Control 40
Tel.: 1-800-933-7452
Website: http://usa.sika.com/dms/getredirect.get/us01.webdms.sika.com/39

Manufacturer: The Euclid Chemical Company
Product name: Eucon SRA
Tel.: 1-800-321-7628
Website: http://www.euclidchemical.com/fileshare/ProductFiles/techdata/eucon sra.pdf

Manufacturer: BASF (Master Builders)
Product name: MasterLife SRA 20
Tel.: 1-800-628-9900
Website: http://assets.master-builders-solutions.basf.com/Shared%20Documents/EB%20Construction%20Chemcials%20-%20US/Admixture%20Systems/Data%20Sheets/MasterLife/BASF-masterlife-sra-20-tds.pdf

Manufacturer: Grace Construction Products
Product name: Eclipse 4500
Tel.: 1-877-423-6491
Website: www.buildsite.com/pdf/wrgrace/Eclipse-4500-Product-Data-578947.pdf

SECTION 652 - EROSION PREVENTION & SEDIMENT CONTROL PLAN

24. SECTION 652 - EROSION PREVENTION & SEDIMENT CONTROL PLAN, is hereby made a new Section of the Specifications as follows:

25. 652.01 DESCRIPTION. This work shall consist of designing, furnishing, and submitting for acceptance modifications to the Contract Erosion Prevention & Sediment Control Plan (hereinto known as the EPSC Plan), becoming a co-permittee with the Agency of Transportation, State of Vermont on associated permits, monitoring the EPSC Plan using an On-Site Plan Coordinator, and maintaining the erosion prevention and sediment control measures to ensure the effectiveness of the EPSC Plan.

26. 652.02 MATERIALS. Materials required for the field work maintenance of the EPSC Plan shall meet all requirements of the appropriate Section of the VAOT Standard Specifications for Construction.

Materials including manuals, checklists, forms, and other supporting documentation necessary to meet the requirements of these provisions and maintain compliance with associated permits shall be made available to the Engineer by the Contractor and maintained on site by the Contractor. Supporting documents associated with the requirements of General Permit 3-9020 are available upon request to ANR or from the ANR Stormwater web page. The VTrans Erosion Prevention and Sediment Control Plan Contractor Checklist and Low Risk Site Inspection Form are available from the VTrans Construction Environmental Engineer.

27. 652.03 QUALIFICATIONS. Modifications to the EPSC Plan shall be prepared and signed by a Licensed Professional Civil Engineer registered in the State of Vermont or a qualified professional in erosion prevention and sediment control, certified by CPESC, Inc. or equivalent, hereinafter called the "Preparer."

28. 652.04 EROSION PREVENTION & SEDIMENT CONTROL PLAN. The EPSC Plan, developed using a combination of structural, non-structural, and vegetative practices to adequately prevent erosion and control sedimentation, and meeting the requirements of the VTrans Erosion Prevention & Sediment Control Plan Designer Checklist (Non-Jurisdictional and Low Risk) or the Vermont Standards & Specifications for Erosion Prevention & Sediment Control based on area of disturbance and risk, has been included in the Contract Documents.

The Contractor shall use the EPSC Plan included in the Contract and, at the onset of construction as well as throughout the duration of the project, modify it to describe changing conditions and illustrate how the criteria of the determined risk will be upheld. For Non-Jurisdictional and Low Risk projects, the Contractor shall use the VTrans Erosion Prevention and Sediment Control Plan Contractor Checklist. For Moderate Risk projects, the Contractor shall modify the Contract EPSC Plan in accordance with the General Permit 3-9020 Parts 4 through 6. If a modification to the EPSC Plan at a Low or Moderate Risk project alters any criteria of the determined risk, an updated Risk Evaluation shall be prepared.

The Contractor may use the Agency's EPSC Plan sheet(s) as a basis for necessary modifications; however, if necessary to convey the sequential nature and phases of construction activities and associated erosion prevention and sediment control measures, several plan sheets showing successive site conditions are recommended.

All work shown in the EPSC Plan shall be included in the Contractor's CPM Progress Schedule, as required by Subsection 108.03.

29. 652.05 SUBMITTALS. Three sets of the modified EPSC Plan as well as the updated Risk Evaluation, stamped and signed by the Preparer, shall be submitted to the Construction Engineer as Construction Drawings in accordance with Section 105. Submittals shall occur after award of the Contract but not later than the Pre-Construction Conference to allow time for review by the Agency. An Acceptance Memo or comments will be provided to the Contractor within 10 working days.

The Contractor shall respond to comments as soon as possible, but not more than 10 days after the date of VTrans initial correspondence.

Agency review time for response to comments will be completed within an additional 10 working days. Modifications or additions to the EPSC Plan will not be considered as an acceptable delay of the work under Subsection 108.11.

All subsequent modifications to the EPSC Plan and updates to the Risk Evaluation will be reviewed and forwarded to the ANR by the Agency as appropriate.

Construction activities for EPSC Plan modifications that do not require authorization from the ANR shall commence only after the EPSC Plan has been accepted by the Agency. Construction activities for EPSC Plan modifications that do require authorization from the ANR shall commence only after that authorization has been granted.

30. 652.06 MONITORING EROSION PREVENTION & SEDIMENT CONTROL PLAN. The Contractor shall designate a person (On-Site Plan Coordinator) who is directly responsible for the on-site implementation of the EPSC Plan. This person shall generally be on-site on a daily basis during active construction and have the authority to halt construction activities if necessary. The On-Site Plan Coordinator shall have demonstrated experience in construction practices as they relate to erosion prevention and sediment control as well as a general understanding of State and Federal environmental regulations and permits pertaining to the National Pollutant Discharge Elimination System Construction Program. The On-Site Plan Coordinator shall be proficient at reading and interpreting engineering and EPSC plans. Preference will be given to a Licensed Professional Civil Engineer registered in the State of Vermont or a qualified professional in erosion prevention and sediment control, certified by CPESC, Inc. or equivalent. The qualifications of the On-Site Plan Coordinator shall be included in the EPSC Plan. The Engineer, if not satisfied with the performance of this individual, may at any time request a replacement.

During active construction and periods of inactivity, the On-Site Plan Coordinator shall be responsible for inspections and reporting.

(a) Active Construction. Inspections shall occur once every seven calendar days and within 24 hours of the end of a storm event that results in a discharge of stormwater from the site. During the winter construction season (October 15th to April 15th, inclusive), inspections at all sites shall occur daily.

For Non-Jurisdictional and Low Risk projects, inspections shall be conducted using the Agency's EPSC Plan Inspection Report (Non-Jurisdictional and Low Risk Projects).

For Moderate Risk projects, inspections shall be conducted using the General Permit 3-9020 Inspection Report for Moderate Risk Projects referenced in the Permit and available upon award of the Contract.

Immediate action shall be taken to correct the discharges of sediment, including halting or reducing construction activities as necessary, until the discharge and/or the condition is fully corrected. Corrective actions shall be recorded on the monitoring reports and shown on the EPSC Plan. Each report shall be signed by the On-Site Plan Coordinator.

(b) Inactive Construction. Periods such as shutdown during the winter season shall require inspection and reporting of erosion prevention and sediment control measures. The Contractor shall contact the Engineer prior to conducting any inspections. The inspections shall be conducted at least once every 30 days and within 24 hours of any storm or significant snow melt event that may cause stormwater runoff to leave the construction site. The Contractor shall provide, within 24 hours, the necessary personnel, equipment, and materials to repair or correct any deficiencies identified during inspection. All deficiencies and corrective measures taken shall be documented on the reports.

Copies of all reports shall be submitted to the Engineer within 24 hours of inspection or when corrective measures were taken. Copies of all reports shall be kept on site in the Contractor's project files.

31. 652.07 MAINTENANCE OF EROSION PREVENTION & SEDIMENT CONTROL PLAN. This work shall consist of providing all labor and equipment necessary for field maintenance of erosion prevention and sediment control items in the Contract, and providing materials and labor necessary for installing, monitoring, maintaining and, where necessary, removing additional measures needed to correct deficiencies that develop during construction that lessen the performance of the EPSC Plan. Erosion prevention and sediment control measures shall be maintained by the Contractor and removed when authorized by the Engineer. The Contractor shall establish vegetation in all areas disturbed during removal of the erosion prevention and sediment control measures.

Any maintenance required due to the failure of the Contractor to follow the EPSC Plan in its accepted form shall be performed at no additional cost to the Agency.

32. 652.08 METHOD OF MEASUREMENT. The quantity of EPSC Plan to be measured for payment will be on a lump sum basis in the complete and accepted work.

The quantity of Monitoring EPSC Plan will be measured to the nearest 1/4 hour for the actual number of authorized hours spent monitoring, reviewing, and reporting on the construction site(s), including waste, borrow and staging areas or other support activities, as it relates to the EPSC Plan. Travel time and other time not spent at the construction site(s) or time not authorized will not be measured for payment (i.e. travel expenses, clerical staff time, copying, miscellaneous expenses, overhead, etc.).

The quantity of Maintenance of EPSC Plan will be on a lump unit basis for all such field maintenance provided for in the Contract, excluding waste, borrow and staging areas or other support activities.

33. 652.09 BASIS OF PAYMENT. The accepted quantity of EPSC Plan will be paid for at the Contract lump sum price. Payment will be full compensation for the initial preparation of modifications, submittals, and all incidentals necessary to complete the work. Subsequent modifications to the EPSC Plan during Construction will be considered incidental to Contract item 652.10.

Partial payments will be made as follows:

(a) The first payment of 50 percent of the lump sum price for the EPSC Plan will be paid for upon acceptance of the EPSC Plan for the entire project.

(b) The second payment of 35 percent of the lump sum price for the EPSC Plan will be made on the first estimate following the completion of 50 percent of the project.

(c) The third payment of 15 percent of the lump sum price for the EPSC Plan will be made when the project is substantially complete.

The accepted quantity of Monitoring EPSC Plan will be paid for at the Contract unit price per hour. Payment will be full compensation for performing the work specified. Payment will not be made unless a report for the monitoring is submitted to and accepted by the Engineer.

The accepted quantity of Maintenance of EPSC Plan will be paid for as specified for force account work in Subsection 109.06. Payments will be drawn against the Contract Lump Unit amount. To provide a common proposal for all bidders, the Agency has entered an amount in the proposal to become part of the Contractor's total bid. Maintenance related to material supply and disposal areas shall be performed in accordance with Subsection 105.29.

Payment will be made under:

Pay Item	Pay Unit
652.10 EPSC Plan	Lump Sum
652.20 Monitoring EPSC Plan	Hour
652.30 Maintenance of EPSC Plan (N.A.B.I.)	Lump Unit

SECTION 900 - SPECIAL PROVISION ITEMS

HIGH PERFORMANCE CONCRETE, RAPID SET

34. DESCRIPTION. This work shall consist of designing, furnishing, and placing a high early strength, high performance, Portland cement concrete at the locations indicated in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 501 of the Standard Specifications.

35. MATERIALS. Materials shall meet the requirements of Subsection 501.02 and the following:

High Early Strength Portland Cement.....701.04

36. MIX DESIGN SUBMISSION CRITERIA. Concrete shall meet the following requirements:

(a) The mix shall be classified as self-consolidating concrete (SCC) mix. If the project will only be using this mix in flat work application, then the mix will be classified and tested as a conventional concrete with a slump not to exceed 9 inches.

(b) Compressive Strength.

28 day compressive strength - 5000 psi

In addition to this requirement, the Contractor shall be aware that a minimum compressive strength of 4000 psi, as determined by field-cured test cylinders, shall be achieved prior to allowing traffic on the structure.

(c) Permeability. 56 Day Permeability - 2500 coulombs (The permeability may be tested prior to 56 days but results must still be 2500 coulombs or less). Test shall be performed in accordance with Subsection 510.04(b)(6)f.

(d) Air Content. 7 ± 1.5%.

(e) Slump/Spread. The mix shall not exhibit segregation at the slump /spread being used.

(1) For SCC mix the visual stability index (VSI) shall be equal to or less than 1.

(2) Spread range will be established for the initial submittal of mix for approval .The J-Ring Test will be conducted per ASTM C1621.The upper and the lower ranges of the spread shall not have a difference of greater than 2 inches between the J-Ring and spread test or VSI greater than 1. Spread test, ASTM C1611, will be done for the production mix only, unless the Engineer requests J-Ring testing be done.

(f) Alkali-Silica Reactivity (ASR). Test shall be performed in accordance with Subsections 510.04(b)(6)g and 510.04(b)(7).

(g) The mix may contain shrinkage-compensating admixture such that there will be no separation of concrete from adjacent precast units. The Contractor shall include results for the unrestrained shrinkage test method, ASTM C 157, procedure 11.1.2. Take readings for a minimum of 28 days after the curing period is complete. The maximum shrinkage allowed shall be 0.04%. Testing shall be performed by an independent lab that is CCRL accredited in AASHTO T 30 or ASTM C 1260.

(h) A proprietary concrete mix design meeting the same performance requirements may also be considered for use.

37. SUBMITTALS. A minimum of fourteen (14) calendar days prior to placement (or prior to the pre-placement meeting, if one is required), the Contractor shall submit the mix design for approval. The mix design shall be submitted to the Agency's Materials Laboratory, attention Composite Materials Engineer. Concrete under this provision shall not be placed until the mix design has been approved.

(a) Trial Batch. Twenty-one (21) to seven (7) days prior to the first placement, the Contractor shall produce and place a 2 cubic yard trial batch, as an SCC, at a location agreed upon by the Contractor and the Engineer. The purpose of this trial batch is to demonstrate that the mix is capable of producing the wet test results within the specified ranges. The Engineer shall be given a minimum notice of seven (7) days prior to the trial batch pour. The trial batch shall be poured in the presence of the Engineer and the Composite Materials Engineer. The trial batch shall be produced and poured in the same manner, estimated concrete temperature, and time frames that will occur during construction. The Contractor shall provide qualified personnel to test spread, air content, and temperature of the trial batch.

The slump/spread shall be within +/-2 inches for conventional mix or +/-3 inches for SCC, but still be within the established range limits for conventional or SCC. J-Ring test will be done for SCC mix with the difference between the J-Ring and spread test not greater than 2 inches.

If this mix will be used in flat work application, a second trial batch will be required at the anticipated slump the Contractor will need; this trial batch will be tested for the same properties, except for the spread, where it will be for slump. If the mix will only be used in flat work application for the project, the requirement for testing the mix as an SCC will be disregarded. If the trial mix falls outside of any of the listed ranges for the testing criteria, the trial batch shall be subject to rejection.

(b) Mix Acceptance Criteria. The placed concrete will be tested for all mix design criteria as specified herein, with the exception of permeability, shrinkage, and ASR. The Contractor may test the load in accordance with 501.06(a)(2) for initial QC in order to make any needed adjustments. The sample shall be taken in accordance with AASHTO R-60 or ASTM C172. If the test results fall outside of the specified ranges for the tested criteria, the mix shall be subject to rejection.

38. CURING CONCRETE. The method of wet curing used shall meet the requirements of Subsection 501.17. Concrete shall be wet cured until it has reached the minimum design strength as specified herein, verified by testing of field cylinders.

39. LOADING OF CONCRETE. After the concrete has been placed and the finishing operations concluded, it shall not be walked on or disturbed in any manner, including the removal of forms, until curing is complete as specified herein.

The concrete shall obtain the specified minimum design strength prior to any vehicular loading.

A portable compression testing machine calibrated in accordance with Section 5 of ASTM C 39 shall be provided by the Contractor and available on-site for cylinder testing of field-cured cylinders for construction progress. There shall also be a hand held grinding stone included with the compression testing machine. The hand held grinding stone will be used to grind the top of the cylinders to relieve any sharp projections on the cylinder surface. All testing and equipment shall conform to ASTM C 39. Testing shall be performed, and equipment operated by, an Agency project individual(s). The individual(s) shall be trained in the operation of the machine by the owner or representative of the machine who is proficient in the operations and functions of the machine.

If an independent lab is proposed to be used to test the field-cured cylinders, the Contractor shall submit documentation providing verification for the following:

(a) Calibration of the compression machine in accordance with Section 5 of ASTM C 39.

(b) Compression machine meets the requirements of ASTM C 39.

(c) Proficiency of the technician who will be performing the test methods.

The Engineer may approve barring any other unforeseen requirements. The State at any time reserves the right to perform an independent proficiency of the technician for the test methods used and review of the testing facility.

40. METHOD OF MEASUREMENT. The quantity of Special Provision (High Performance Concrete, Rapid Set) to be measured for payment will be the number of cubic meters (cubic yards) of concrete placed in the complete and accepted work, as determined by the prismoidal method using dimensions shown on the Plans or as directed by the Engineer, including the volume of precast concrete stay-in-place forms, but excluding the volume of steel or other stay-in-place forms and form filling materials. No deductions will be made for the volume of concrete displaced by steel reinforcement, structural steel, expansion joint material, scuppers, weep holes, conduits, tops of piles, scoring, chamfers or corners, inset panels of 38 mm (1 ½ inches) or less in depth, or any pipe less than 200 mm (8 inches) in diameter.

41. BASIS OF PAYMENT. The accepted quantity of Special Provision (High Performance Concrete, Rapid Set) will be paid for at the Contract unit price per cubic meter (cubic yard). Payment will be full compensation for performing the work specified, including designing the mix, satisfactory finishing and curing, and for furnishing all forms, materials, including joint filler and bond breaker, labor, tools, admixtures, equipment, including automatic temperature recording units, trial batches, and incidentals necessary to complete the work.

The cost of heating materials and protecting the concrete against cold weather, and any additional cost for cement, will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

The cost of furnishing testing facilities and supplies at the batch plant and the setting of inserts, bench marks, and bridge plaques furnished by the Agency will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

Costs for all materials, labor, and incidentals for steel or other stay-in-place forms and form filling materials will not be paid for separately, but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

Payment will be made under:

Pay Item	Pay Unit
900.608 Special Provision (High Performance Concrete, Rapid Set)(FPQ)	Cubic Yard

STONE FILL, STREAM BED MATERIAL

42. DESCRIPTION. This work shall consist of furnishing and placing stone fill material inside of, as well as upstream and/or downstream of, a structure to facilitate aquatic organism passage and mimic the native channel

43. MATERIAL. Stone Fill shall be approved, hard, blasted, angular rock other than serpentine rock containing the fibrous variety chrysotile (asbestos) supplemented with material excavated from the channel and/or the tailings of a topsoil screening operation, with gradation adjusted to conform to the following:

(a) Type I. The longest dimension of the stone shall be at least 18 inches, and at least 50 percent of the volume of the stone in place shall have a least dimension of 12 inches, and at least 25 percent of the particles shall have a maximum dimension of 2 inches and be well graded material.

(b) Type II. The longest dimension of the stone shall be at least 24 inches, and at least 50 percent of the volume of the stone in place shall have a least dimension of 18 inches, and at least 25 percent of the particles shall have a maximum dimension of 2 inches and be well graded material.

(c) Type III. The longest dimension of the stone shall be at least 36 inches, and at least 50 percent of the volume of the stone in place shall have a least dimension of 24 inches, and at least 25 percent of the particles shall have a maximum dimension of 2 inches and be well graded material.

(d) Type IV. The longest dimension of the stone shall be at least 48 inches, and at least 50 percent of the volume of the stone in place shall have a least dimension of 36 inches, and at least 25 percent of the particles shall have a maximum dimension of 2 inches and be well graded material.

Bed material shall be approved by the Engineer and the Agency of Natural Resources prior to use.

44. PLACING. Stone fill shall be placed at as shown in the Plans. Place the stone such that it does not cause segregation or damage to the structure.

Fill in voids in the stone with a mixture of fines from the existing stream bed material. Fill voids by hand tamping with metal tamping rods, plate compactors, and water pressure with a metal wand to reach between stones.

Once all material has been placed in the stream channel, the Contractor shall slowly wet the stream to minimize the effects of the initial sediment pulse. Every attempt shall be made to minimize the movement of sediment downstream of the site.

There shall be no subsurface flow upon final inspection.

45. METHOD OF MEASUREMENT. The quantity of Special Provision (Stone Fill, Stream Bed Material) to be measured for payment will be the number of cubic meters (cubic yards) installed in the complete and accepted work, measured within the limits shown on the Plans or as directed by the Engineer.

46. BASIS OF PAYMENT. The accepted quantity of Special Provision (Stone Fill, Stream Bed Material) will be paid for at the Contract unit price per cubic meter (cubic yard). Payment will be full compensation for furnishing, transporting, and placing the material specified and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.608 Special Provision (Stone Fill, Stream Bed Material)(TYPE I)	Cubic Yard

CPM SCHEDULE

47. DESCRIPTION. This work shall consist of developing and furnishing a CPM Schedule, including narratives, updates, and revisions for the duration of the Contract.

These provisions shall supersede Subsection 108.03(a) of the Standard Specifications.

48. SUBMISSIONS.

(a) The Contractor is responsible for the scheduling of all Contract work, which shall include, but is not limited to subcontracted work, complete and acceptable submissions, work component fabrications, and delivery of materials. The schedule shall include allowance for time for all aspects of the work including sufficient time for VTrans to perform its functions as indicated in the Contract, including but not limited to acceptance inspection and/or testing, and review and acceptance/approval of any required Working Drawings as defined in Section 105 or otherwise in the Contract Documents.

(b) Provide the following items with each schedule submission. The schedule shall be prepared with MS Project.

(1) An electronic copy in MS Project format with run date and version of the schedule;

(2) A PDF illustrated in color, depicting no more than 50 activities on each 280 by 430 mm (11 by 17 in.) sheet, and with each sheet including title, project name and number, match data for diagram correlation, and a key;

(3) A four-week look-ahead narrative to provide a more detailed plan of upcoming work highlighting the near term priorities. Indicate the anticipated workdays per week, number of shifts per day, number of hours per shift, crew sizes, and assumed resources. If the project requires a road closure, identify any changes in anticipated resources, or work schedule during the closure period.

(c) The CPM schedule shall include the following:

(1) Activities that describe the essential features of the work, activities that might delay Contract completion, and which activities are on the critical path;

(2) The planned start and completion dates for each activity and the duration of each activity stated in work days (field activities of more than 15 work days in duration shall be broken into two or more activities distinguished by location or some other logical feature); this estimated figure shall include considerations for permit limitations, seasonal limitations, and any other anticipated delays.

(3) When the project contains a defined Road or Bridge Closure Period of a minimum of 24 hours and up to a maximum of 28 days, the duration for work within the closure period shall be shown in hours instead of days. The maximum duration of each activity within the closure period shall be limited to twelve (12) hours;

(4) Finish-to-Start relationships among activities, without leads or lags unless justified in the narrative, and approved by the Engineer;

(5) Distinct columns showing Predecessors, Successors, Duration, Actual Start, and Actual Finish for each Activity;

(6) Project suspension or work inactivity that is three (3) days or longer;

(7) Dates related to the procurement of materials, equipment, and articles of special manufacture;

(8) Dates related to the submission of Working Drawings, plans, and other data specified for review or approval by the Agency;

(9) Key milestone dates specified in the Contract including but not limited to; Notice to Proceed, Interim Completion, Permit Restriction Dates, and Contract Completion Date. These shall be the only constraints in the schedule logic;

(10) Activities related to Agency or Third Party reviews and inspections.

(d) For contracts with an original Contract amount in excess of $8,000,000.00 the following additional information shall be shown on the CPM schedule:

(1) Each Contract bid item identified with at least one activity, except:

Lump Sum items, Lump Unit items, Contract items paid by the "Hour", Contract items paid by the "Dollar", Section 641 pay items, and Section 653 pay items.

(2) Each compensable activity shall identify the applicable Contract item(s), along with the total quantity intended to be placed during that activity.

49. BASELINE SCHEDULE. The CPM Schedule submittal shall be received by the Engineer a minimum of seven (7) calendar days prior to the preconstruction meeting. The Engineer and Contractor may review the schedule at the preconstruction meeting. Any requested information and a revised schedule shall be submitted within seven (7) calendar days after receiving the Engineer's request. The Engineer shall be allowed twenty-one (21) calendar days to review the schedule and provide a response. The Engineer will review the schedule by assessing the schedule's compliance with these provisions and conformance with the Contract requirements. By accepting the schedule, the Engineer does not modify the Contract in any way. The Baseline Schedule shall be accepted before any field work begins. The accepted schedule will be used as the Baseline Schedule for the remainder of the project.

The schedule shall define and sequence activities so as to accurately describe the project and to meet Contract requirements for scope of work, phasing, accommodations for traffic, and interim, and project completion dates. Create the schedule, beginning with the date of the Notice to Proceed.

50. SCHEDULE UPDATES. The schedule shall be updated during active construction at the end of every other bi-weekly estimate period (update period) and when directed by the Engineer. Projects with short duration road closures are of particular importance as the project float will be limited. The Contractor shall promptly inform the Engineer of any schedule delays or changes that occur during these periods. The Engineer shall be allowed ten (10) calendar days to review the update for compliance with these provisions and provide a response. Include the following with each update:

(a) Actual start dates of each activity started;

(b) Actual finish dates of each activity finished, or remaining durations of activities started but not yet completed;

(c) Narrative report describing progress during the update period, shifts in the critical activities from the previous update, sources of delay, potential problem areas, work planned for the next update period, and changes made to the schedule. Changes include additions, deletions, or revisions to activities due to the issuance of a Contract revision, changes to an activity duration, changes to relationships between activities, or changes to the planned sequence of work or the method and manner of its performance.

(d) The Original schedule shall be shown as a Baseline.

51. REVISIONS. Schedule revisions shall be submitted within ten (10) calendar days after any of the following:

(a) A written request to revise the schedule from the Engineer;

(b) A delay (actual or projected) to scheduled milestones or project completion dates;

(c) When actual progress falls behind the most recent schedule accepted by the Engineer, either by falling more than two (2) weeks behind schedule or by 5% of the total Contract time, the Contractor shall immediately inform the Engineer in writing. The Engineer may require the Contractor to submit a revised schedule. Neither the Engineer's acceptance of such revised schedule nor any Agency feedback regarding the revised schedule shall be construed as an approval of the revised schedule, nor should it be construed as the Agency's dictation of the Contractor's means and methods;

(d) Issuance of a Change Order/Supplemental Agreement(s) that by adding, deleting, or revising activities, changes the planned sequence of work or the method and manner of its performance;

(e) Issuance of a Change Order/Supplemental Agreement(s) that adds time to the Contract;

(f) The Contractor shall participate in progress meetings at the request of the Engineer to review and discuss the updated schedule information including any activity delay, coordination requirements, change orders, potential delays, and other relevant issues.

The Engineer shall review the revised schedule for compliance with these provisions, and provide a response within ten (10) calendar days.

52. FLOAT. Any float in the schedule is to be credited to the project only.

53. FAILURE TO SUBMIT SCHEDULE. Failure to submit a schedule (i.e. original baseline schedule, required updates, revisions, and when requested by the Engineer) in accordance with these provisions may be grounds for suspension of partial payments, as identified in Subsection 109.08, until a satisfactory schedule meeting the requirements of these provisions is received by the Engineer.

54. METHOD OF MEASUREMENT. The quantity of Special Provision (CPM Schedule) to be measured for payment will be the number of each CPM Schedule (i.e. original baseline schedule, required updates, revisions, and when requested by the Engineer), accepted by the Engineer through the duration of the Contract.

55. BASIS OF PAYMENT. The accepted quantity of Special Provision (CPM Schedule) will be paid for at the Contract unit price for each. Payment will be full compensation for preparing and submitting a schedule as specified, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.620 Special Provision (CPM Schedule)	Each

GUARDRAIL APPROACH SECTION TO CONCRETE BRIDGE RAILING

56. DESCRIPTION. This work shall consist of furnishing and erecting guardrail approach sections to concrete or combination bridge railing as shown in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 621 of the Standard Specifications.

57. SUBMITTALS. Fabrication Drawings shall be submitted to the Structures Engineer for approval in accordance with Subsection 105.03.

58. METHOD OF MEASUREMENT. The quantity of Special Provision (Guardrail Approach Section To Concrete Bridge Railing) to be measured for payment will be the number of units installed in the complete and accepted work, measured within the pay limits shown on the Plans.

59. BASIS OF PAYMENT. The accepted quantity of Special Provision (Guardrail Approach Section To Concrete Bridge Railing) will be paid for at the Contract unit price for each. Payment will be full compensation for furnishing, transporting, handling, and placing the materials specified, including terminal connector, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.620 Special Provision (Guardrail Approach Section To Concrete Bridge Railing)	Each

GUARDRAIL END ASSEMBLY, TYPE IIA

60. DESCRIPTION. This work shall consist of furnishing and erecting guardrail end assembly, Type IIA as detailed on the plans, and connecting it to the corresponding bridge approach railing or box beam guardrail as shown in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 621 of the Standard Specifications.

61. SUBMITTALS. Fabrication Drawings shall be submitted to the Structures Engineer for approval in accordance with Subsection 105.03.

62. METHOD OF MEASUREMENT. The quantity of Special Provision (guardrail end assembly, Type IIA) to be measured for payment will be the number of units installed in the complete and accepted work, measured within the pay limits shown on the Plans.

63. BASIS OF PAYMENT. The accepted quantity of Special Provision (guardrail end assembly, Type IIA) will be paid for at the Contract unit price for each. Payment will be full compensation for furnishing, transporting, handling, and placing the materials specified, including the connections to the corresponding guide rail or bridge approach railing, Typical End assembly detailed in the plans, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.620 Special Provision (Guardrail End Assembly, Type IIA)	Each

PRESTRESSED CONCRETE NEXT D BEAMS

64. DESCRIPTION. This work shall consist of manufacturing, transporting, and erecting precast prestressed concrete members.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 510 of the Standard Specifications.

65. DESIGN AND DRAWINGS. All design details shall be in accordance with the AASHTO LRFD Bridge Design Specifications, the AASHTO LRFD Bridge Construction Specifications, and PCI Northeast's NEXT D Standards dated January, 2010 and their latest revisions.

66. METHOD OF MEASUREMENT. The quantity of Special Provision (Prestressed Concrete Next D Beams) to be measured for payment will be the number of meters (linear feet) of the specified type used in the complete and accepted work.

67. BASIS OF PAYMENT. The accepted quantity of Special Provision (Prestressed Concrete Next D Beams) will be paid for at the Contract unit price per meter (linear foot) for the type specified. Payment will be full compensation for detailing, fabricating, repairing, quality control testing, transporting, handling, and installing the materials specified, including the concrete, reinforcement, prestressing steel, transverse ties, enclosures for prestressing steel, anchorages, mortar, anchor rods, any other material contained within or attached to the members, for furnishing and implementing the erection plan, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Any grouting work for other than shear keys, such as fairing out unevenness between adjacent units and filling leveling screw holes, transverse anchor recesses, and dowel holes, is considered incidental to the work for Special Provision (Prestressed Concrete Next D Beams).

Payment will be made under:

Pay Item	Pay Unit
900.640 Special Provision (Prestressed Concrete Next D Beams)(NEXT 36 D)(FPQ)	Linear Foot

PREFABRICATED BRIDGE UNIT SUPERSTRUCTURE

68. DESCRIPTION. This work shall consist of manufacturing, transporting, and erecting concrete/steel composite prefabricated bridge units (PBU's) as shown on the Plans. The work shall also include connecting the units into a monolithic superstructure through use of closure pours as shown on the Plans.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Sections 501, 506, 507, and 508 of the Standard Specifications.

69. MATERIALS. Materials shall meet the requirements of Subsections 501.02, 506.02, 507.02, 508.02, and the following:

Concrete Repair Material.....780.01-780.04

70. GENERAL FABRICATION REQUIREMENTS. The structural steel furnished under this Section shall be fabricated in a plant meeting the requirements of Subsection 506.03. After fabrication, the structural steel shall be transported to a location, approved by the Agency where the steel will be shop galvanized/metallized, or where the remainder of the composite superstructure unit shall be fabricated.

The Fabricator or Contractor constructing the reinforced concrete portion of the PBU's shall:

(a) Have demonstrated experience in forming, casting, curing, and finishing High Performance Concrete superstructure decks in accordance with Section 501;

(b) Adequately prepare and submit for approval a Quality Control Plan and erection/lifting plan(s) specific to the member detailed.

71. SUBMITTALS. As soon as practical after award of the Contract, all required information shall be prepared and submitted by the Contractor or Fabricator(s). Submittals shall be in accordance with Subsection 105.03 and shall include the following:

(a) Structural Steel. In accordance with Subsection 506.04.

(b) Concrete. In accordance with Subsection 540.04, with the exception that when the PBU's have been designed by the Agency and no modifications to that design are being made by the Fabricator or Contractor, no structural design calculations are required.

(c) Reinforcing Steel. In accordance with Subsection 507.03.

72. INSPECTION. Structural steel shall be inspected by the Agency in accordance with Subsection 106.04 and Section 506.

Concrete elements furnished and the work performed herein shall be inspected by the Agency. The inspector shall have the authority to reject any material or work that does not meet the requirements of these Specifications. Advance notification of at least two (2) weeks must be provided by the Contractor to the Agency's Engineer and the Structural Concrete Engineer concerning the proposed intention to commence work. A minimum of five (5) working days notification must be provided to the Structural Concrete Engineer by the Contractor to confirm the fabrication start date.

Prior to placing any concrete elements produced under these Specifications, the Materials and Research Engineer shall have approved all applicable material certifications required in accordance with Subsection 700.02.

73. FABRICATION.

(a) Forming Members. Forms shall be well constructed, carefully aligned, clean, substantial, and firm, and securely placed and fastened together to provide a level, true riding surface. The adjustable supports and deflection control shall be checked by the Fabricator's engineer prior to pouring and monitored throughout the pouring process. Any defects or damage due to form work, stripping, or handling may be cause for rejection. Holes, cutouts, anchorage, reinforcement, and any other related details shown on the Plans shall be provided for in the members.

The form finish shall be in accordance with the approved Fabrication Drawings.

Relative bearing elevations shall be within ± 0.01′ of that shown on the Plans.

(b) Structural Steel. Structural steel shall be fabricated in conformance with Section 506. All diaphragms shown on the Plans shall be installed prior to placing any concrete formwork.

(c) Welding. All welding shall conform to the requirements of Subsection 506.10.

(d) Reinforcing Steel. Bar reinforcement shall be furnished and installed in conformance with Section 507.

(e) Concrete. Concrete mix and proportioning shall meet the requirements of Subsection 501.03 for Concrete, High Performance Class A. Concrete shall be produced and tested in accordance with Subsections 501.04 through 501.07.

(f) Pre-Production Meeting. Unless the Engineer deems, in writing, that a pre-production meeting is unnecessary, then a pre-production meeting shall be held a minimum of seven (7) calendar days prior to beginning concrete placement. The pre-production meeting shall be attended by, and including but not limited to, the Crew Supervisor, Contractor Project Manager, Inspector or Inspector's Supervisor, and Design Project Manager and/or Designer.

(g) Placing Concrete. Concrete shall not be deposited in the forms until the Agency representative has approved placement of the reinforcement and inserts. The concrete shall be vibrated internally, externally, or a combination thereof to the required consolidation. The vibrating shall be done with care and in such a manner that:

(1) Concrete is uniformly consolidated.

(2) Displacement of reinforcement and inserts is avoided.

(3) Acceptable finish surfaces are produced.

(h) Curing. Curing shall meet the requirements of Subsection 501.17.

(i) Removal of Forms. Forms shall not be removed until the curing period has ended.

(j) Concrete Finishing. Finishing shall conform to the requirements of Subsection 501.16.

(k) Dimensional Tolerances.

(1) Geometry of Concrete Deck.

a. Length (Each Unit). ± 3/4" (Adjacent unit lengths shall not vary by more than 20 mm (3/4"))

b. Width. ± 3/8"

c. Deck Thickness. + 3/8", - 1/4"

d. Deviation from Diagonals. ± 3/4" (horizontal)

e. Deviation from End Squareness or Skew. ± 3/4" (horizontal)

f. Stringer Spacing. ± 1/2" (within a unit)

g. Horizontal Alignment. ± 3/8" (Deviation from straight line parallel to the centerline of the unit)

h. Insert Location. ± 3/8"

(2) Reinforcing.

a. Spacing. ± 1" (non-cumulative)

b. Cover (Top and Bottom Mat). ± 1/4"

(3) Field Installation.

a. Vertical deviation between units prior to grouting shall not exceed 3/8".

b. Deviation in joint width between units shall be ± 1/2".

(l) Acceptance of Units. Individual precast units will not be accepted for any of the following reasons:

(1) Fractures or cracks passing through the deck.

(2) Camber that does not meet the requirements in the approved Fabrication Drawings.

(3) Honeycombed open texture.

(4) Dimensions not within the allowable tolerances as specified.

(5) Separation of the concrete deck from the steel girders.

(6) Defects that indicate proportioning, mixing, and molding not in compliance with the Specifications.

(7) Damaged ends where such damage would prevent making a satisfactory joint.

(8) Units with crack(s) within any part of the concrete that is/are greater than 0.8 mm (0.03") in width.

(9) Significant damage to the units during transportation, erection, or construction as determined by the Engineer.

(10) Units not fabricated in accordance with the Contract Documents.

(m) Repairing/Patching. Units that contain minor defects caused by manufacture or handling may be repaired at the manufacturing site. Repair procedures shall be in accordance with the approved Quality Control Plan and require approval by the Engineer. Minor defects are defined as holes, honeycombing, or spalls which are 150 mm (6 inches) or less in diameter and do not penetrate deeper than 25 mm (1 inch) into the concrete. Surface voids or "bugholes" that are less than 16 mm (5/8 inch) in diameter and less than 6 mm (1/4 inch) deep need not be repaired. Repairs shall be made using an overhead and vertical concrete repair material satisfactory to the Engineer. The repair material shall be cured as specified by the manufacturer. The Engineer shall approve final repairs.

(n) Cracking. Crack widths less than 0.3 mm (0.01") shall be sealed with a penetrating sealer using Agency approved materials and procedures. Crack widths measuring 0.3 mm to 0.8 mm (0.01" to 0.03") shall be epoxy injected using Agency approved materials and procedures. At the Engineer's discretion, cracked members shall be repaired or replaced at the Contractor's expense.

(o) Labeling. Each unit shall be clearly and permanently labeled on the underside of the deck (in the vicinity of the upstation end diaphragm) with the following information:

(1) Manufacturer

(2) Date of Manufacture

(3) Mark Number

(p) Production Site Handling. Units shall not be lifted, moved, or otherwise disturbed until the concrete has reached full design strength.

(q) Pre-Assembly. The units shall be pre-assembled at the fabrication location to assure proper match between adjacent units before shipping to the project site, to the satisfaction of the Agency.

(r) Shipping. Units shall not be shipped until the minimum 28-day strength is attained and they have been stamped by the Agency. A 48-hour advance notice of the loading and shipping schedule shall be provided. The units shall be secured on the vehicle in order that no fatigue cracking will occur during transport. The Contractor shall secure the necessary hauling permits.

74. HANDLING. Handling shall be performed in accordance with Subsection 540.09.

75. INSTALLATION.

(a) General. The PBU's shall be fabricated in accordance with the applicable Sections of the specifications and/or the Special Provisions for each respective item. Construction procedures and permissible variations other than those contained herein shall be submitted for approval.

(b) Erection Plan. Cranes, lifting devices, and other equipment for erecting PBU superstructure shall be of adequate design and capacity to safely erect, align, and secure all members and components in their final positions without damage. The Contractor is solely responsible for the methods and equipment employed for the erection of the precast concrete/steel composite superstructure units.

The Contractor shall submit Construction Drawings in accordance with Section 105 for the methods and sequence of precast concrete/steel composite superstructure unit erection, the temporary bracing, and the equipment to be used for the erection. The erection plan shall include the necessary computations to indicate the magnitude of stress in the segments during erection and to demonstrate that all of the erection equipment has adequate capacity for the work to be performed. The erection plan shall contain provisions for all stages of construction, including temporary stoppages.

The PBU's may be used to support equipment prior to placement of the pavement only with written permission of the Engineer. The proposed use of the precast concrete/steel composite superstructure units for support of equipment shall be detailed in the erection plan.

Submittal of the erection plan is for the Agency's information only, and shall in no way be construed as approval of the proposed method of erection. Unless otherwise directed by the Engineer, the Contractor shall follow the erection plan as submitted.

(c) Erection of Units. Erection of units shall not proceed until substructure concrete has been cured for the minimum length of time specified in the Plans or appropriate Specifications. Units shall be installed to the correct line and grade as shown on the approved drawings and as indicated in the approved erection procedure. Prior to setting units and to avoid torsion stresses, bearing elevations within a given PBU shall be adjusted to match relative elevations used during the deck casting operations. After all the units are erected, they shall be inspected to ensure the correctness of their location.

(d) Matching Elevation of Units. Adjacent units shall match elevation within 6 mm (1/4 inch) vertically (along longitudinal edges) and 6 mm (1/4 inch) vertically at the end of units. If the tolerance is not met, the units shall be adjusted as indicated in the procedures shown on the approved Working Drawings.

(e) Filling and Sealing Longitudinal Joints. Prior to placement of closure pour concrete or grout material, the surface of the joint shall be free of any material, such as oil, grease, or dirt, which may prevent bonding of the sealing materials.

(f) Sealing of Lifting Holes. After the units are in their final locations, a bonding agent shall be applied and the lifting holes filled with cementitious grout. A removable form shall be provided at the bottom surface of the deck to retain the grout.

(g) Loading. Units may be loaded upon erection and before the joints are sealed in accordance with the approved erection procedure. Once the joints are sealed, no further loading of the units will be allowed until joint material has properly and finally cured and as approved by the Engineer.

(h) Final Repairs. After the installation work is complete, remaining concrete defects, holes for inserts, and lifting holes shall be repaired as indicated and approved by the Engineer.

(i) Grout. Grout shall be placed in accordance with the requirements of Subsection 540.11.

76. METHOD OF MEASUREMENT. The quantity of Special Provision (Prefabricated Bridge Unit Superstructure) to be measured for payment will be the number of meters (linear feet) installed in the complete and accepted work. Measurement shall be bound by the horizontal projection of bridge fascias and centerline of bearings near the ends of the bridge.

77. BASIS OF PAYMENT. The accepted quantity of Special Provision (Prefabricated Bridge Unit Superstructure) will be paid for at the Contract unit price per meter (linear foot). Payment will be full compensation for detailing, fabricating, repairing, quality control testing, transporting, handling, and installing the materials specified, including concrete, reinforcing steel, structural steel, shear studs, connectors, and shims; for designing and installing lift brackets and any other material contained within or attached to the members; for any grouting work required; for furnishing and implementing the erection plan; and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Bearing assemblies and concrete and reinforcing steel within the longitudinal superstructure closure pours and end diaphragm closure pours will be paid for separately.

Payment will be made under:

Pay Item	Pay Unit
900.640 Special Provision (Prefabricated Bridge Unit Superstructure)(FPQ)	Linear Foot

PRE-EXCAVATION OF INTEGRAL ABUTMENT PILES

78. DESCRIPTION. This work shall consist of removing the foundation materials that may be encountered in designated areas to permit the driving or placing of piles.

79. MATERIALS. Materials shall meet the requirements of the following Subsections:

(a) Sand. Sand shall meet the requirements of Subsection 703.03.

80. CONSTRUCTION REQUIREMENTS. The pre-excavation of integral abutment piles shall consist of augering, pre-boring, or some other means of excavation to produce an excavation to the depth and diameter specified in the Contract Documents. The excavation shall be maintained to allow for backfilling with sand in accordance with the Contract Documents. Temporary casing is considered an acceptable option.

Following installation of the piles, and in accordance with the plans, the entire pre-excavation shall be filled with sand. Casing used to facilitate installation of the pile and backfill material shall not be left in place.

81. METHOD OF MEASUREMENT. The quantities of Special Provision (Pre-excavation of Integral Abutment Piles, Earth) and Special Provision (Pre-excavation of Integral Abutment Piles, Rock) to be measured for payment will be the total number of meters (linear feet) of excavation to the depth specified in the Contract Documents or as ordered by the Engineer, measured to the nearest meter (linear foot) from the bottom of pile cap to the bottom of the excavation limit shown on the plans.

82. BASIS OF PAYMENT. The accepted quantities of Special Provision (Pre-excavation of Integral Abutment Piles, Earth) and Special Provision (Pre-excavation of Integral Abutment Piles, Rock) will be paid for at the Contract unit price per meter (linear foot). Payment will be full compensation for furnishing, transporting, storing, and installing the materials specified including the sand, for performing required excavation, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.640 Special Provision (Pre-excavation of Integral Abutment Piles, Earth)	Linear Foot
900.640 Special Provision (Pre-excavation of Integral Abutment Piles, Rock)	Linear Foot

CONTRACTOR-FABRICATED PRECAST CONCRETE STRUCTURE

83. DESCRIPTION. This work shall consist of manufacturing, transporting, handling, and erecting precast concrete structure components fabricated by the Contractor at a location other than a Precast Concrete Institute (PCI) or National Precast Concrete Association (NPCA) certified precast concrete facility.

84. MATERIALS. Materials shall meet the requirements of Subsections 501.02, 507.02, and 540.02.

(a) Concrete. Concrete shall meet the requirements of Subsection 540.05, with the exception that the requirements of part (a) do not apply. In lieu of a mix meeting the requirements of Subsection 540.05, the Contractor may provide a mix meeting the requirements of Section 501 for Concrete, High Performance Class A or Concrete, High Performance Class B, provided that the design strength as shown in the Plans as well as that required for lifting and handling is met.

85. GENERAL FABRICATION REQUIREMENTS. Unless noted otherwise herein, Contractor-fabricated Precast Concrete (CFPC) produced and paid under this Special Provision shall meet the requirements of Sections 501, 507, and 540.

86. SUBMITTALS. As soon as practical after award of the Contract, all required information shall be prepared and submitted. Fabrication drawings, mix designs, and erection plans shall be submitted as separate submittals.

If the contractor proposes a different configuration than what is provided in the contract plans then a complete copy of the structural design calculations for the CFPC shall be submitted accompanying / with Construction Drawings in accordance with Section 105. The design calculations shall substantiate that the proposed precast concrete satisfies the design parameters of the Contract. The applicable design code will be the latest edition of the AASHTO LRFD Bridge Design Specifications unless indicated otherwise in the Contract Documents.

Fabrication Drawings for the precast concrete shall be submitted in accordance with Section 105, with an additional copy to the Composite Materials Engineer. In addition to the requirements for Fabrication Drawings in Section 105, the following shall be included:

(a) Dimensions and tolerances of the precast concrete to be fabricated.

(b) The concrete mix design, including but not limited to the following:

(1) Batch weights specifying dry or saturated surface dry.

(2) Material names and sources.

(3) Aggregate properties and date tested.

(4) Chemical and physical properties of cementitious material.

(5) Admixture names and sources.

(6) Lab data that shall include, but not be limited to:

a. Slump.

b. Air Content.

c. Temperature.

d. Ratio of Water/Cementitious Material.

e. Cylinder breaks for 28 days standard cured.

f. 56-day Rapid Chloride Ion Permeability - AASHTO T 277 test data. The results shall be the average from testing 3 specimens, but the individual specimen results shall also be included. Testing shall be performed by an independent laboratory accredited by AMRL in this test method.

g. Alkali-Silica Reactivity (ASR) - AASHTO T 303 data from testing of both the fine and coarse aggregates. Testing shall be performed by an independent laboratory accredited by AMRL in this test method.

(7) Alkali-Silica Reactivity (ASR). If potentially reactive aggregates are to be used in a mix design, then proposed mitigation method(s) and test results must be provided. The AASHTO T 303 test must be run again with the proposed mitigation method(s) and using the proposed job cementitious material proportioning. The proposed mitigation method(s) shall reduce expansion to below 0.10%.

If a mix design, including the testing results, has been submitted and approved within a 12 month period, it may be used in lieu of submitting an additional mix design. However, if any change in the material sources, properties, or proportions has occurred, then a new mix design with lab test data will be required regardless of previous approval. The requirements for testing in Subsections 540.04(b)(6)f, 540.04(b)(6)g, and 540.04(b)(7) above shall be waived if the submitted mix design has a minimum proportion of the cementitious material content of that allowed for use in High Performance Concrete in Section 501.

The mix design shall be approved by the Composite Materials Engineer prior to fabrication.

(c) The sources and properties of the materials proposed for use.

(d) The reinforcement schedule, placement of reinforcing steel, welded wire fabric, mechanical bar connectors, and inserts.

(e) The type of surface finish and how the finish will be obtained. Include details of potential repair procedures.

(f) The curing method, detailing sequence, and duration.

(g) The minimum required concrete strength for design strength and form removal.

(h) The design of the lifting attachments.

(i) Transportation, handling, and storage details along with calculations to substantiate the proposed CFPC units will not be cracked/ damaged by handling and/or transport.

(j) The installation procedures, including a detailed grouting procedure.

(k) A Quality Control Plan that identifies a Quality Control Manager and provides previous experience for work of this nature. A Description of Quality Control Processes addressing but not limited to:

(1) Concrete production including batching, delivery, and placement.

(2) Formwork.

(3) Reinforcing.

(4) Concrete finishing.

(5) Concrete cure.

(6) Shipping/Installation procedures.

87. INSPECTION. Materials furnished and the work performed herein shall be inspected by the Agency. The Agency will test all concrete incorporated into the work in accordance with Section 501. The inspector shall have the authority to reject any material or work that does not meet the requirements of the Specifications. Advance notification of at least two (2) weeks shall be provided by the Contractor to the Agency's Engineer and the Composite Materials Engineer concerning the proposed intention to commence work. A minimum of five (5) working days notification shall be provided by the Contractor to the Agency's Engineer and the Composite Materials Engineer to confirm the fabrication start date.

Prior to placing any precast concrete elements produced under these Specifications, all materials shall have all applicable certifications approved in accordance with Subsection 700.02.

88. FABRICATION.

(a) Pre-Production Meeting. Unless the Engineer deems, in writing, that a pre-production meeting is unnecessary, then a pre-production meeting shall be held a minimum of seven (7) calendar days prior to beginning concrete placement. The pre-production meeting shall be attended by, as a minimum but not limited to, the Crew Supervisor, Contractor Project Manager, Concrete Producer, Resident Engineer, Project Manager, and Composite Materials Engineer.

(b) Placing Concrete. Concrete placement shall be in accordance with Subsection 501.10 and as specified herein. Concrete shall not be deposited in the forms until the appropriate Agency representative has approved placement of the reinforcement, conduits, and anchorages.

(c) Repairs/Patching. CFPC structure components that contain minor defects caused by manufacture or handling may be repaired at the manufacturing site. Minor defects are defined as holes, honeycombing, or spalls which are 150 mm (6 inches) or less in diameter and that do not penetrate deeper than 25 mm (1 inch) into the concrete. Surface voids or "bugholes" that are less than 16 mm (5/8 inch) in diameter and less than 6 mm (1/4 inch) deep need not be repaired. Repairs shall be made using a material from the Agency's Approved Products List for overhead and vertical concrete repair. The repair material shall be cured as specified by the manufacturer. Repairs shall be approved by the Engineer.

(d) Cracking. Cracks less than 0.25 mm (0.01 inch) in width shall be sealed by a method approved by the Engineer. Cracks in excess of 0.25 mm (0.01 inch) may be cause for rejection. At the Engineer's discretion, cracked CFPC structure components shall be repaired or replaced at the Contractor's expense.

(e) Dimensional Tolerances. All tolerances shall be in accordance with the latest editions of both PCI MNL 116 *Manual for Quality Control for Plants and Production of Precast and Prestressed Concrete Products* and PCI MNL 135 *Tolerance Manual for Precast and Prestressed Concrete Construction*, or with the National Precast Concrete Association (NPCA) *Quality Control Manual for Precast Concrete*, unless otherwise noted in the Contract Documents or as approved by the Engineer.

(f) Marking. The date of manufacture, the production lot number, and the piece mark shall be clearly marked on each individual piece of precast concrete. The mark shall be in a location that will not be visible in the finished product.

89. HANDLING, STORAGE, AND SHIPPING. Each CFPC structure shall be handled, stored, and shipped in such a manner as to minimize chipping, cracks, fractures, discoloration, and excessive bending stresses. A unit damaged by handling, storage, or shipping shall be replaced at the Contractor's expense.

A CFPC structure shall not be installed until the respective unit has been inspected. This inspection shall verify that the pieces are free from defects, and that all specification requirements, including but not limited to those for compressive strength and tolerance requirements, have been achieved. In addition, a CFPC structure will not be considered for shipment until the completion of the cure period and the required strength has been attained as demonstrated by field-cured cylinder breaks.

90. INSTALLATION METHODS, EQUIPMENT, AND ERECTION. Cranes, lifting devices, and other equipment for CFPC structure erection shall be of adequate design and capacity to safely erect, align, and secure all members and components in their final positions without damage. The Contractor is solely responsible for the methods and equipment employed for the erection of the CFPC structure components.

Construction Drawings for CFPC structure component erection shall be submitted in accordance with Section 105. The erection plan shall include the necessary computations to indicate the magnitude of stress in the units during erection and to demonstrate that all of the erection equipment has adequate capacity for the work to be performed, and provisions for all stages of construction, including temporary stoppages.

Post tensioning shall comply with Subsection 540.12.

Submittal of the erection plan is for the Agency's documentation only and shall in no way be construed as approval of the proposed method of erection. The Contractor shall follow the erection plan as submitted.

91. GROUT.

(a) Unless otherwise noted grout shall be used to fill shear keys, leveling screw voids, transverse tie anchor recesses, dowel holes, and for fairing joints as detailed in the Contract Documents or as ordered by the Engineer.

Grout shall be Mortar, Type IV. Acceptable grout materials shall be those included on the Approved Products List on file with the Agency's Materials and Research Section. Additional aggregates shall not be added to the material during field mixing.

The Contractor, with written permission from the Engineer, has the option to use ready-mixed mortar for the grouting process. The Contractor shall prepare and submit for approval the mix design for the grout. The maximum quantity that may be delivered in a single load is one cubic meter (1.25 cubic yards), which shall be delivered and placed within the time limits specified by the manufacturer.

For testing, 6 neat 50 mm (2 inch) cubes shall be molded and cured in accordance with AASHTO T 106 (ASTM C 109). The average compressive strength of 3 cubes shall be a minimum of 7 MPa (1000 psi) at 3 days and a minimum of 35 MPa (5000 psi) at 28 days.

(b) The surface to be grouted shall be thoroughly cleaned, wetted, and free of all standing water. The grout shall be mixed using a mechanical mixer according to the manufacturer's recommendations and shall be readily pourable so that it completely fills the shape of the shear keys or holes, depending on the product being installed. The placement of grout shall be continuous so as to produce a monolithic key absent of any voids or cold joints.

(c) All exposed grout shall be cured for a period of no less than three days by the wetted burlap method in accordance with Section 501. Curing shall commence as soon as practical after grout placement.

92. METHOD OF MEASUREMENT. The quantity of Special Provision (Contractor-Fabricated Precast Concrete Structure) of the type and size specified to be measured for payment shall be on a lump sum basis. The lump sum shall include all of the CFPC structure components in the complete and accepted work for each location specified in the Contract.

93. BASIS OF PAYMENT. The accepted quantity of Special Provision (Contractor-Fabricated Precast Concrete Structure) of the type and size specified will be paid for at the Contract lump sum price. Payment shall be full compensation for designing, detailing, fabricating, repairing, transporting, handling, and erecting the materials specified, for furnishing and implementing the erection plan, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Any grouting work, such as fairing out unevenness between adjacent precast concrete structure components and filling leveling screw holes, shear keys, transverse anchor recesses, and dowel holes, is considered incidental to the work for Special Provision (Contractor-Fabricated Precast Concrete Structure).

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (Contractor-Fabricated Precast Concrete Structure)(Abutment #1)	Lump Sum
900.645 Special Provision (Contractor-Fabricated Precast Concrete Structure)(Abutment #2)	Lump Sum
900.645 Special Provision (Contractor-Fabricated Precast Concrete Structure)(Approach Slab #1)	Lump Sum
900.645 Special Provision (Contractor-Fabricated Precast Concrete Structure)(Approach Slab #2)	Lump Sum

REMOVE AND RELOCATE EXISTING STONE WALL

94. DESCRIPTION. This work shall consist of removing and relocating existing stone wall(s) at the location(s) indicated in the Plans and as directed by the Engineer.

95. MATERIALS. All materials shall be approved by the Engineer prior to use.

96. GENERAL. This work shall consist of removing and relocating existing stone masonry to return the existing stone wall(s) to their original preconstruction condition and as indicated and specified in the Contract Documents. The work includes, but is not limited to, the following:

Existing stones shall be relocated and reset in their new locations, removing any gaps that occurred due to previous damage to the wall. Additional stone shall be provided by the Contractor as necessary to complete construction of the wall.

97. CONSTRUCTION REQUIREMENTS. The work shall be performed by a stone mason who is highly knowledgeable and experienced in the construction of dry stone masonry walls and fascia. The Contractor's stone mason performing the work must demonstrate at least five years experience in the construction of dry stone masonry walls. Documentation of experience, including lists of references and previous projects, shall be submitted to the Engineer prior to commencement of the work.

All stones shall be carefully removed in the areas shown in the Plans.

The existing stones shall be relocated and reset in their new locations, removing any gaps that occurred due to previous damage. All joints in the reconstructed stone walls shall not be larger than 50 mm (2 inches) between stones. Any existing stones that are not suitable for replacement or missing shall be replaced by the Contractor with stones of similar size and appearance. Additional stone required to complete construction of the wall shall be approved by the Engineer prior to commencement of the work.

Adding stone as necessary to complete construction of the wall or new small stones to the joints of the reconstructed stone walls will be considered incidental to the work to be performed for stone masonry.

98. METHOD OF MEASUREMENT. The quantity of Special Provision (Remove and Relocate Existing Stone Wall) to be measured for payment will be on a lump sum basis for each wall removed and relocated in the complete and accepted work.

99. BASIS OF PAYMENT. The accepted quantity of Special Provision (Remove and Relocate Existing Stone Wall) will be paid for the Contract lump sum price. Payment shall be full compensation for removing and relocating the existing stone wall; furnishing, transporting, handling, and placing the materials specified, including additional stone as necessary to complete construction of the wall; and for furnishing all labor, tools, equipments, and incidentals necessary to complete the work.

Partial payments will be made as follows:

(a) An initial payment of 40% of the lump sum price will be paid upon the removal of the existing stone wall.

(b) The remaining 60% of the lump sum price will be paid when the stone wall has been relocated and reconstructed to the satisfaction of the Engineer.

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (Remove and Relocate Existing Stone Wall)	Lump Sum

TEMPORARY RELOCATION OF STREAM

100. DESCRIPTION. This work shall consist of temporary stream relocation including erosion prevention and sediment control, channel maintenance, and debris removal in accordance with these specifications.

101. MATERIALS. Materials shall meet the requirements of the following Subsections:

Geotextile Fabrics.....649.02
Stone Fill, Type II.....706.04(b)

Other materials may be used. These shall be detailed on the EPSC Plan and are subject to approval.

102. GENERAL. Prior to their construction, the Contractor shall submit to the Engineer site-specific plans, including all construction, erosion prevention and sediment control, and maintenance details, for providing temporary stream relocations at stream crossings specified in the Plans. These details shall be developed in accordance with the requirements of Section 652 and will be considered a component of the overall project EPSC Plan.

All relocation plans must be approved by the Agency of Natural Resources prior to being submitted to the Engineer. These plans shall provide for a flow equal to twice the average daily flow, as a minimum, and shall be designed and stamped by a Professional Civil Engineer registered in the State of Vermont. The plans shall address erosion prevention and sediment control, channel maintenance, debris removal, removing equipment from the stream and preparing the site if a significant rain event occurs while working in the stream, and the materials and methods of creating the upstream diversion from the existing stream channel. These plans shall conform to any permits, both State and Federal, which have been issued for this project.

The Contractor shall provide for crossing the relocated stream channel for the duration of its existence so as not to impact the free flow of the stream or to increase any flood levels or potential for property damage upstream or downstream of the project site.

It shall be incumbent upon the Contractor to determine the level of protection required to protect the work. However, the protection of existing facilities, structures, and property must also be undertaken and any damage thereto shall be repaired by the Contractor at no additional expense to the State. In addition, the temporary diversion shall not increase in any way flood levels or property damage upstream or downstream of the project site.

In-stream construction shall be undertaken during the period from July 1st through October 1st. Any changes to this period shall be approved in writing by the Vermont Agency of Natural Resources. It shall be the responsibility of the Contractor to obtain any variances to the in-stream construction period.

Excavation for the relocated stream channel shall be made in conformance with the requirements for channel excavation as specified in Subsection 203.06.

Furnishing and installing Geotextile Fabrics and Stone Fill shall be in conformance with the requirements of Sections 649 and 613, respectively.

Furnishing and installing pipes shall be in conformance with Section 601.

The upstream diversion shall be done in such a manner as to minimize erosion and sedimentation. Upstream diversion shall not be done when stream conditions are such that the possibility of excessive erosion and sedimentation will occur.

The relocation shall be maintained, throughout the time it is in place, free from debris, logs, stumps, and other obstructions which might impair the free-flow of water through the diversion.

After completion of the new bridge and permanent channel improvements and the rediversion of channel flow through the new permanent channel, the entire length of the temporary channel shall be excavated to remove all muck, sediment, debris, and foreign matter.

Any portion of the temporary channel which falls outside of the embankment limits shall be restored to match the existing ground and shall be included in the unit price bid for Temporary Relocation of Stream.

Any turf establishment required outside of the embankment limits shall be paid for under the appropriate Contract items.

103. METHOD OF MEASUREMENT. The quantity of Special Provision (Temporary Relocation of Stream) to be measured for payment shall be on a unit basis for each temporary stream location specified, installed, maintained, and removed in the complete and accepted work.

Where a temporary relocation of stream is constructed for the convenience of the Contractor and is not specified in the Plans or ordered by the Engineer, the costs for the temporary relocation shall be considered incidental to all other Contract items.

104. BASIS OF PAYMENT. The accepted quantity of Special Provision (Temporary Relocation of Stream) will be paid for at the Contract lump sum price for each temporary stream relocation. Payment will be full compensation for designing, as necessary, constructing, including all required materials, maintaining, and removing each temporary stream relocation.

Payment for the design and detailing of erosion prevention and sediment control measures for Temporary Relocation of Stream will be considered incidental to Contract item 652.10.

Payment for the monitoring and maintenance of erosion prevention and sediment control measures for Temporary Relocation of Stream will be considered incidental to Contract items 652.20 and 652.30, respectively.

Payment for erosion prevention and sediment control measures for Temporary Relocation of Stream will be made under the appropriate items in the Contract.

When the construction of the temporary stream relocation is completed, operational, and accepted, a payment of 75 percent of the Contract lump sum price will be allowed. The remaining 25 percent of the Contract lump sum price will be paid when the temporary stream relocation has been removed and the site restored and stabilized to the satisfaction of the Engineer.

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (Temporary Relocation of Stream)	Lump Sum

TRAFFIC CONTROL

105. DESCRIPTION. This work shall consist of establishing and maintaining traffic control measures to protect the traveling public and construction operations as indicated in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 641 of the Standard Specifications.

106. SUBMITTALS. The Contractor shall submit to the Engineer for approval a site-specific traffic control plan in accordance with Subsection 105.03. The traffic control plan shall conform to the requirements of the MUTCD and all applicable Agency Standard Drawings. Where conflicts exist, the MUTCD will govern. Each phase of construction shall be included in the submitted traffic control plan. The Contractor shall allow the Agency 14 calendar days to review and respond to the proposed traffic control plan.

107. TRAFFIC CONTROL DEVICES. Temporary traffic barrier shall meet the requirements of Section 621. Traffic control devices shall meet the requirements of Section 641.

108. METHOD OF MEASUREMENT. The quantity of Special Provision (Traffic Control, All-Inclusive) to be measured for payment will be on a lump sum basis for providing traffic control in the complete and accepted work.

The quantities for Uniformed Traffic Officers and Flaggers will be measured separately in accordance with Section 630.

109. BASIS OF PAYMENT. The accepted quantity of Special Provision Traffic Control, All-Inclusive) will be paid for at the Contract lump sum price.

Partial payments will be made as follows:

(a) The first 15% of the Contract lump sum price will be paid upon approval of the Contractor's traffic control plan.

(b) The remaining 85% of the Contract lump sum price will be paid on a prorated basis for the estimated duration of the Contract work remaining.

Payment will be full compensation for preparing, implementing, inspecting, maintaining, and removing the applicable traffic control plan and required traffic control devices, including but not limited to temporary traffic barrier, temporary pavement markings, and signing; and for furnishing all labor, tools, materials, equipment, and incidentals necessary to complete the work.

Uniformed Traffic Officers and Flaggers will be paid for separately under Contract items 630.10 and 630.15, respectively.

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (Traffic Control, All-Inclusive)	Lump Sum

INCENTIVE/DISINCENTIVE (I/D)

110. INCENTIVE/DISINCENTIVE (I/D), is hereby made a new Section of the Specifications as follows:

To provide a common proposal for all bidders and expedite the incentive payment process, the Agency has entered an amount of Fifty-six thousand ($56,000) dollars in the proposal to become part of the Contractor's total bid. Fifty-six thousand ($56,000) dollars amount is the maximum amount payable under the incentive clause but the actual payment/deduction will be computed and paid/deducted per this special provision and the stipulations of Special Provision No 11.

The payment of monies for performance under the Incentive/Disincentive (I/D) specifications contained in these Special Provisions shall be as follows:

(a) The quantity of incentive to be paid will be the accepted quantity of incentive computed per the provisions of the special provision No 11. For the incentive payment as described in part (c) of Special Provision No. 11, the Contractor will be paid in the next bi-weekly estimate in which the Contractor has satisfactorily met the requirements of I/D.

(b) The quantity of disincentive to be deducted will be the quantity of disincentive computed per the provisions of the special provision No 11 .For the assessed disincentive as described in part (c) of Special Provision No. 11, the Engineer will deduct the amount due the Agency from the monies due the Contractor on the next bi-weekly estimate.

GALVANIZING STRUCTURAL STEEL

111. DESCRIPTION. This work shall consist of furnishing all materials and equipment necessary and to galvanize the structural steel in accordance with the contract documents and as directed by the Engineer.

The work under this section shall be performed in accordance with these provisions, the plans, and Section 506 of the Standard Specifications.

112. MATERIALS. Surfaces to be galvanized shall be coated in accordance with Subsection 726.08.

113. SUBMITTALS. As soon as practical after award of the contract, all required information shall be prepared and submitted to the Structures Engineer for approval in accordance with Subsection 105 of the Standard Specifications.

114. METHOD OF MEASUREMENT.

The quantity of Special Provision (Galvanizing Structural Steel) to be measured for payment will be on a lump sum basis for all the structural steel installed in the complete and accepted work.

115. BASIS OF PAYMENT. The accepted quantity of Special Provision (Galvanizing Structural Steel) will be paid for at the Contract unit price for Lump Sum (LS). Partial payments will be made as follows:

(a) The first payment of 75% of the lump sum price will be made upon the original delivery to the project, provided the materials are acceptable and certified.

(b) The remaining 25% will be paid when the installation complete and the work accepted.

Payment for Special Provision (Galvanizing Structural Steel) will be full compensation for surface preparation, furnishing, transporting, handling, and placing the materials specified, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (Galvanizing Structural Steel)	Lump sum

METALLIZING STRUCTURAL STEEL

116. DESCRIPTION. This work shall consist of furnishing all materials and equipment necessary and to metalize the structural steel in accordance with the contract documents and as directed by the Engineer.

The work under this section shall be performed in accordance with these provisions, the plans, and Section 506 of the Standard Specifications.

117. MATERIALS. Surfaces to be metallized shall be coated in accordance with Subection 726.09.

118. SUBMITTALS. As soon as practical after award of the contract, all required information shall be prepared and submitted to the Structures Engineer for approval in accordance with Subsection 105 of the Standard Specifications.

119. METHOD OF MEASUREMENT.

The quantity of Special Provision (Metallizing Structural Steel) to be measured for payment will be on a lump sum basis for all the structural steel installed in the complete and accepted work.

120. BASIS OF PAYMENT. The accepted quantity of Special Provision (Metallizing Structural Steel) will be paid for at the Contract unit price for Lump Sum (LS). Partial payments will be made as follows:

(a) The first payment of 75% of the lump sum price will be made upon the original delivery to the project, provided the materials are acceptable and certified.

(b) The remaining 25% will be paid when the installation is complete and the work accepted.

Payment for Special Provision (Metallizing Structural Steel) will be full compensation for surface preparation, furnishing, transporting, handling, and placing the materials specified, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item		Pay Unit
900.645	Special Provision (Metallizing Structural Steel)	Lump sum

BITUMINOUS CONCRETE PAVEMENT, SMALL QUANTITY

121. DESCRIPTION. This work shall consist of constructing one or more courses of bituminous mixture on a prepared foundation in accordance with these specifications and the specific requirements of the type of surface being placed, and in reasonably close conformity with the lines, grades, thicknesses, and typical cross sections shown on the Plans or established by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and the appropriate provisions of Section 406 or Section 490 of the Standard Specifications.

122. MATERIALS. Materials shall meet the requirements of the following Subsections:

Performance-Graded Asphalt Binder.....702.02
Emulsified Asphalt, RS-1H or CRS-1H.....702.04
Aggregate for Marshall Bituminous Concrete Pavement...704.10(a)
Aggregate for Superpave Bituminous Concrete Pavement..704.10(b)

Aggregate shall meet requirements relating to Section 406 or 490, where so specified.

The grade of PG asphalt binder used to produce bituminous concrete pavement shall be 58-28. Substitutions will be accepted based on availability where the upper end temperature value is greater than 58°C (136°F) and/or the lower end temperature value is less than -28°C (-18°F).

123. DESIGN MIX TYPES. Design mix types may be substituted based on mix availability. Allowable mix type substitutions will be accepted on a one to one thickness relationship, except as listed in Tables A and B below.

TABLE A - ALLOWABLE 40 MM (1½") MIX TYPE IVS SUBSTITUTIONS

Design ESALs (millions)	Design	Allowable Substitution	
	490.30 Superpave Bituminous Concrete Pavement	406.25 Bituminous Concrete Pavement*	406.27 Med. Duty Bituminous Concrete Pavement*
< 0.3	TYPE IVS	TYPE III	TYPE III
0.3 to < 10	TYPE IVS	TYPE III	-

*Per Section 406.

TABLE B - ALLOWABLE 90 MM (3½") MIX TYPE IIS SUBSTITUTIONS

Design ESALs (millions)	Design	Allowable Substitution	
	490.30 Superpave Bituminous Concrete Pavement	406.25 Bituminous Concrete Pavement*	406.27 Med. Duty Bituminous Concrete Pavement*
< 0.3	TYPE IIS	TYPE I	TYPE I
0.3 to < 10	TYPE IIS	TYPE I	-

*Per Section 406

124. COMPOSITION OF MIXTURE.

(a) Gradation. Gradation shall meet the requirements of Section 406 or 490, as appropriate.

(b) Design Criteria. Design Criteria shall meet the requirements of Section 406 or 490, as appropriate.

(c) Mix Design. Standard mix design will be in accordance with Subsection 490.03 with an n value of 65 gyrations. Allowable substitutions based on pre-existing approved mix designs and/or n values for intended Contract suppliers are listed in Table C below. A request for substitutions must be submitted in writing to the Engineer a minimum of 10 working days prior to production. Any substitutions from the standard mix design or mix types as detailed in the Plans shall not result in any increase in cost to the Agency.

TABLE C - ALLOWABLE SPECIFICATION SUBSTITUTIONS

Design ESALs (millions)	Acceptable Specification Substitution		
	Superpave Bituminous Concrete Pavement (Gyrations)	Bituminous Concrete Pavement* (75 Blow)	Med. Duty Bituminous Concrete Pavement* (50 Blow)
< 0.3	50	✓	✓
0.3 to < 10	65[1]	✓	-

[1]Standard mix design specification.
*Per Section 406

(d) Quality Acceptance.

(1) General. Acceptance sampling and testing will be conducted in accordance with the Agency's Quality Assurance Program as approved by FHWA. Bituminous concrete mixtures designated under these specifications will be sampled a minimum of once per day of production or 500 metric tons (sublot), or other sublot size deemed appropriate, and evaluated by the Agency for each mix type (each mix design) in accordance with the following acceptance guidelines.

(2) Acceptance Guidelines. Temperature of the bituminous mixture shall be tested using the Verified Thermometer test method and PG Asphalt Binder content determined from the batch slip. Gradation shall be tested in accordance with AASHTO T 30. Mixture volumetric properties (air voids and VMA) shall be calculated in accordance with Subsections 406.03(b) or 490.03(b), as appropriate.

(3) Non-Compliant Material.

a. Rejection by Contractor. The Contractor may, prior to sampling, elect to remove any defective material and replace it with new material at no expense to the Agency. Any such new material will be sampled, tested, and evaluated for acceptance.

b. For any non-compliant material outside the production testing tolerances contained in the applicable Table 406.03C or 490.03C, the representative material (sublot) shall be assessed a mixture pay adjustment factor, PF(mix), of (-0.200).

(e) Boxed Samples. If Agency plant inspectors are not available for daily testing and inspection functions, then box samples will be taken by the Engineer at the project site to afford verification of mixture volumetrics/properties. Boxed samples will be processed and results reported to the Engineer within ten working days of being received at the Agency Central Laboratory in Berlin, Vermont. Gradation shall be tested in accordance with AASHTO T 30. Maximum Specific Gravity shall be tested in accordance with AASHTO T 209. Boxed samples will be assessed a mixture pay adjustment factor of 0.000.

125. COMPACTION. Special Provision (Bituminous Concrete Pavement, Small Quantity) will be analyzed for density according to the procedure specified below.

The density of the compacted pavement shall be at least 92.0%, but not more than 97.0%, of the corresponding daily average maximum specific gravity for each mix type (each mix design) of bituminous mix placed during each day, or placed per bridge for any bridge project. For material that falls outside of this range, payment will be made by adjusting the daily production totals in accordance with Table D:

TABLE D - DENSITY PAY FACTORS

AVERAGE DENSITY	DENSITY PAY FACTOR, PF(d)
89.0% - 90.4%	- 0.150
90.5% - 91.9%	- 0.100
92.0% - 93.4%	0.000
93.5% - 95.4%	0.150
95.5% - 97.0%	0.000
97.1% - 98.5%	- 0.100

When the Contract allows for a pay adjustment for mat density and the Agency elects to not take cores of any pavement course, the Density Pay Factor (PF(d)) will be considered equal to 0.000.

Bridges with a length equal to, or greater than, six meters (20 feet) will be cored for analyzing density of the bridge deck pavement. The minimum number of cores (taken from the center of the travel lane) shall be two, or as directed by the Engineer. Bridges with a length less than six meters (20 feet) will not be cored. Bridge decks or approaches will not be cored within three meters (10 feet) of a bridge or construction joint.

Bridge deck core areas shall be repaired with hot bituminous mix to the satisfaction of the Engineer at no additional cost to the Agency.

The cores taken for acceptance testing will be the final cores taken for determination of densities.

When the Contract does not allow for a pay adjustment for mat density the Contractor shall, prior to performing any construction operations, submit to the Engineer for approval the proposed rolling pattern and compaction equipment to be used on the project. Random investigative cores will be taken by Agency personnel on the first day's production of any pavement course, with the exception of the leveling course, to verify effectiveness of the proposed rolling pattern and equipment.

Pending results of the investigative cores, necessary adjustments to the proposed rolling pattern and/or equipment shall be made by the Contractor to achieve densities as directed by the Engineer.

126. METHOD OF MEASUREMENT. The quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) to be measured for payment will be the number of metric tons (tons) for a lot of mixture (each type) complete in place in the accepted work (Q) as determined from the weigh tickets.

The quantities of all applicable Pay Adjustments calculated for the project will be determined as specified below.

When applicable, and when the mixture pay factor, PF(mix), for a lot of Special Provision (Bituminous Concrete Pavement, Small Quantity) is less than 0.000, the measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) placed will be multiplied by such pay factor to determine a Mixture Pay Adjustment, (PA(mix)), to the accepted tonnage placed (Q) for that lot based on the Contract bid price (B), as follows:

$$PA(mix) = PF(mix) \times Q \times B$$

When applicable, and when the density pay factor, PF(d), for a lot of Special Provision (Bituminous Concrete Pavement, Small Quantity) is less than 0.000, the measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) placed that day, or placed per bridge for any bridge project, will be multiplied by such pay factor to determine a Mat Density Pay Adjustment, (PA(d)), to the accepted tonnage placed (Q) for that lot based on the Contract bid price (B), as follows:

$$PA(d) = PF(d) \times Q \times B$$

127. BASIS OF PAYMENT. The measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) will be paid for at the Contract unit price per metric ton (ton). Payment shall be full compensation for furnishing, mixing, hauling, and placing the material specified and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment for Pay Adjustments shall be debited against the Contract prices (Lump Units) bid for the Pay Adjustment items.

The cost of repairing bridge deck core areas will not be paid for separately, but will be considered incidental to Special Provision (Bituminous Concrete Pavement, Small Quantity).

The costs of furnishing testing facilities and supplies at the plant will be considered included in the Contract unit price of Special Provision (Bituminous Concrete Pavement, Small Quantity).

The costs of obtaining, furnishing, transporting, and providing the straightedges required by Subsection 406.16 or Subsection 490.16, as appropriate, will be paid for under the appropriate Section 631 pay item included in the Contract.

The costs associated with obtaining samples for acceptance testing will be incidental to the cost of Special Provision (Bituminous Concrete Pavement, Small Quantity).

When not specified as items in the Contract, the costs of cleaning and filling joints and cracks, sweeping and cleaning existing paved surfaces, the emulsified asphalt applied to tack these surfaces, and tacking of manholes, curbing, gutters, and other contact surfaces will not be paid for directly, but will be incidental to Special Provision (Bituminous Concrete Pavement, Small Quantity).

Special Provision (Bituminous Concrete Pavement, Small Quantity) mixture approved by the Engineer for use in correcting deficiencies in the base course constructed as part of the Contract will not be paid for as Special Provision (Bituminous Concrete Pavement, Small Quantity), but will be incidental to the Contract item for the specified type of base course.

Special Provision (Bituminous Concrete Pavement, Small Quantity) mixture used to correct deficiencies in an existing pavement or to adjust the grade of a bituminous concrete surface completed under the Contract will be paid for at the Contract unit price for Special Provision (Bituminous Concrete Pavement, Small Quantity).

Payment will be made under:

Pay Item	Pay Unit
900.650 Special Provision (Mat Density Pay Adjustment, Small Quantity)(N.A.B.I.)	Lump Unit
900.650 Special Provision (Mixture Pay Adjustment) (N.A.B.I.)	Lump Unit
900.680 Special Provision (Bituminous Concrete Pavement, Small Quantity)	Ton

ADDITIONAL SPECIAL PROVISIONS

128. NOTICE TO BIDDERS. The Contractor is hereby notified that a mechanical coupler may be used to splice the bar labeled N11 on the next beam details 1 sheet in order to accommodate the fabricator's formwork. Placement of the mechanical coupler shall be detailed in the fabrication drawings.

The contractor is hereby further notified that the mechanical coupler shall meet the requirements of section 713 for "Mechanical splices for bar reinforcement" and will be included in the unit bid price for item 900.640 SPECIAL PROVISION (PRESTRESSED NEXT D BEAMS)(NEXT 36D)(FPQ).Epoxy coated splice couplers will be allowed per General Special Provision section 713.

129. NOTICE TO BIDDERS. The Contractor is hereby notified that built-up welded plate girders are allowable substitutes and may be used in lieu of the W24 X 162 Rolled Beams provided that the flange and web sizes are equal to or greater than that of the rolled beams. If the flange and web sizes are increased the Contractor shall be responsible for determining changes to the dead load deflection and the resulting changes to the required camber.

The contractor is hereby further notified that no additional compensation will be considered for the substitute other than the contract price for 900.608 SPECIAL PROVISION (PREFABRICATED BRIDGE UNITS SUPERSTRUCTURE) (FPQ).

130. NOTICE TO BIDDERS - AWARD OF CONTRACT. A complete bid proposal for this Contract must include three total bid prices, one for each subtotal of an Alternate plus the subtotal of Items Common to All Alternates as indicated in the Schedule of Items.

The apparent low bidder will be the responsible bidder submitting the lowest total bid for either alternate.

Added November 3, 2015

Award of the Contract, if it be awarded, will be made to the lowest responsible bidder under the alternate for which the lowest total bid is submitted.

Minimum Labor and Truck Rates
Under Title 19, Vermont Statutes
Annotated Section 18, as amended

STATE OF VERMONT
AGENCY OF TRANSPORTATION
MONTPELIER

FOR OTHER THAN FEDERAL-AID. In accordance with the provisions of Title 19, VSA, Section 18, the following minimum rate for labor shall apply to this project:

The minimum wage for common labor will not be less than the State or Federal minimum wage, whichever is higher.

ON FEDERAL-AID PROJECTS ONLY.

The minimum rates for labor for Federal-Aid Projects shall be those set in the Wage Determination Decision of the U.S. Secretary of Labor for each project in accordance with the Federal-Aid Highway Act of 1956. When such wage rates are required they shall be included in the proposal. In the event these rates are lower than the Vermont rates, the Vermont rates shall prevail.

TRUCK RATES. In accordance with the provisions of Title 19, VSA, Section 18, the following minimum rates for trucks shall apply to this project:

Trucks, not Including Driver Water Level Body Capacity	Minimum Rates Per YD per Hr.
Trucks, Equipment Loaded	$1.65

State of Vermont
Agency of Transportation

July 2015
CA-110

DISADVANTAGED BUSINESS ENTERPRISE (DBE) POLICY CONTRACT REQUIREMENTS

Disadvantaged Business Enterprise (DBE) Policy. It shall be the policy of the Vermont Agency of Transportation (VTrans) to ensure nondiscriminatory opportunity for Disadvantaged Business Enterprises (DBEs) to participate in the performance of all contracts and subcontracts financed with Federal funds as specified by the regulations of the United States Department of Transportation (USDOT), Federal Highway Administration and as set forth below.

1. **Policy.** It is the policy of USDOT that DBEs as defined in 49 Code of Federal Regulation (CFR) Part 26 shall have the maximum opportunity to participate in the performance of contracts financed in whole or in part with Federal funds. Consequently, the DBE requirements of 49 CFR Part 26 and 23 CFR, Chapter 1, Part 230, Subpart b apply to this contract.

2. **DBE Obligation.** The State and its Contractors agree to ensure that DBEs as defined in 49 CFR Part 26, have the maximum opportunity to participate in the performance of contracts and subcontracts financed in whole or in part with Federal funds. **Each subcontract the prime contractor signs with a subcontractor must include this assurance:** *The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the award and performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of USDOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy, as VTrans deems appropriate.*

3. **Sanctions for Noncompliance.** The Contractor is hereby advised that failure of the Contractor, or any Subcontractor performing work under this contract, to carry out the requirements set forth in paragraphs 1 and 2 above shall constitute a breach of contract and after the notification of the Vermont Agency of Transportation, Secretary of Transportation, may result in termination of this contract by the State or such remedy as the State deems necessary.

4. **Inclusion in Subcontracts.** The Contractor shall insert in each of its subcontracts this Disadvantaged Business Enterprise (DBE) Policy and also a clause requiring its subcontractors to include this same Policy in any lower tier subcontracts which they may enter into, together with a clause requiring the inclusion of the Policy in any further subcontract that may in turn be made. This Policy shall not be incorporated by reference.

Disadvantaged Business Enterprise (DBE) Program Goals. The Vermont Agency of Transportation (VTrans) is required to set an overall DBE goal for participation in all transportation related Federal-aid projects. The goal is determined following guidelines set forth in 49 CFR 26.45, and based on the availability of ready, willing and able DBEs who submitted bids and quotes for transportation related projects, compared as a percentage of all available contractors who submitted bids and quotes for transportation related projects during the same time period. The DBE goal may be adjusted to take into account other factors impacting DBE utilization, in an effort to narrowly tailor the overall DBE goal. The detailed goal setting methodology and current overall DBE goal may be viewed on the VTrans Civil Rights website.

VTrans currently utilizes a race/gender neutral policy to fulfill its overall DBE goals, and relies on the voluntary participation of contractors to utilize certified DBEs on every project sufficient to obtain the Agency's overall DBE goal. In order for this practice to continue, contractors must be proactive and solicit bids and quotes from certified DBEs for use when submitting their own bids, and employ certified DBEs when participating on transportation related projects. Otherwise, VTrans may have to implement specified contract goals on projects to ensure the overall DBE goals are met. VTrans may include specific DBE contract goals in certain cases to ensure DBE participation, if failure to obtain the project DBE goal would negatively impact the Agency's overall DBE goal because of the size of the contract.

Disadvantaged Business Enterprise (DBE) Definition. A DBE is defined as a business that is owned and controlled by one or more socially and economically disadvantaged person(s). For the purposes of this definition:

(1) "Socially and economically disadvantaged person" means an individual who is a citizen or lawful permanent resident of the United States and who is a Woman, Black, Hispanic, Portuguese, Native American, Asian American, or a member of another group, or an individual found to be disadvantaged by the Small Business Administration pursuant to Section 3 of the Small Business Act.

(2) "Owned and controlled" means a business which is:

a. A sole proprietorship legitimately owned and controlled by an individual who is a disadvantaged person.

b. A partnership, joint venture or limited liability company in which at least 51% of the beneficial ownership interests legitimately is held by a disadvantaged person(s).

c. A corporation or other entity in which at least 51% of the voting interest and 51% of the beneficial ownership interests legitimately are held by a disadvantaged person(s).

The disadvantaged group owner(s) or stockholder(s) must possess control over management, interest in capital, and interest in earnings commensurate with percentage of ownership. Disadvantaged participation in a joint venture must also be based on the sharing of real earnings, as above. If the disadvantaged group ownership interests are real, substantial and continuing and not created solely to meet the requirements of the program, a firm is considered a bona fide DBE.

Certified DBE Directory. The current Vermont Unified Disadvantaged Business Enterprise (DBE) Directory is available online at VTrans Civil Rights website . This directory contains all currently certified DBEs available for work in Vermont, and is updated continuously. Only firms listed in this directory are eligible for DBE credit on Vermont Federal-aid projects. If you have questions about DBE certification, or do not have access to the Internet, please call the DBE Program Manager at (802) 828-5858 for assistance.

Counting DBE Participation Towards Project Goals. In order for payments made to DBE contractors to be counted toward DBE goals, the DBE contractors must perform a commercially useful function (CUF). The DBE must be responsible for execution of the work of the contract and must carry out its responsibilities by actually performing, managing, and supervising the work involved, consistent with standard industry practices.

This means that:

- The DBE must also be responsible for ordering its own materials and supplies, determining quantity and quality, negotiating price, installing (where applicable) and paying for the material itself;
- The DBE must perform work commensurate with the amount of its contract;
- The DBE's contribution cannot be that of an extra participant or a conduit through which funds are passed in order to obtain the appearance of DBE participation;
- The DBE must exercise responsibility for at least fifty percent of the total cost of its contract with its own workforce;
- None of the DBE's work can be subcontracted back to the prime contractor, nor can the DBE employ the prime's or other subcontractor's supervisors currently working on the project;
- The DBE's labor force must be separate and apart from that of the prime contractor or other subcontractors on the project. Transferring crews between primes, subcontractors, and DBE contractors is not acceptable;
- The DBE owner must hold necessary professional or craft license(s) or certification(s) for the type of work he/she performs on the project;
- The DBE may rent or lease, at competitive rates, equipment needed on the project from customary leasing sources or from other subcontractors on the project.

Allowable credit for payments made to DBEs for work performed. A contractor may take credit for payments made to a certified DBE that satisfies CUF requirements at the following rate:

- A DBE Prime Contractor: Count 100% of the value of the work performed by own forces, equipment and materials towards the DBE goals.

- An approved DBE subcontractor: Count 100% of the value of work performed by the DBE's own forces, equipment and materials, excluding the following:

    - The cost of materials/supplies purchased from a non-DBE Prime Contractor.

    - The value of work provided by non-DBE lower tier subcontractors, including non-DBE trucking to deliver asphalt to a DBE contractor.

- A DBE owner-operator of construction equipment: Count 100% of expenditures committed.

- A DBE manufacturer: Count 100% of expenditures committed. The manufacturer must be a firm that operates or maintains a factory or establishment that produces on the premises the materials or supplies obtained by the Contractor.

- A regular DBE dealer/supplier: Count 60% of expenditures committed. A regular dealer/supplier is defined as a firm that owns, operates, or maintains a store, warehouse or other establishment, in which the materials or supplies required for the performance of the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. A person may be a dealer in such bulk items as petroleum products, steel, cement, gravel, stone or asphalt without owning, operating or maintaining a place of business, if the person both owns and operates distribution equipment for the products, by the means of a long term agreement, and not by a contract by contract basis.

- A DBE broker: Count for DBE credit only the fees or commissions charged for assistance in the procurement, and, fees and transportation charges for the delivery of materials or supplies required at the job site, but not the cost of materials procured. A broker is defined as any person(s) or firm who arranges or expedites transactions for materials or supplies, and does not take physical possession of the materials or supplies at their place of business for resale.

- A DBE renter of construction equipment to a contractor: Count 20% of expenditures committed, with or without operator.

- A bona fide DBE service provider: Count 100% of reasonable fees or commissions. Eligible services include professional, technical, consultant, or managerial, services and assistance in the procurement of essential personnel, facilities, equipment, materials or supplies required for the performance of the contract. Eligible services also include agencies providing bonding and insurance specifically required for the performance of the contract.

- A trucking, hauling or delivery operation: Count 100% of expenditures committed when trucks are owned, operated, licensed and insured by the DBE and used on the contract and, if applicable, includes the cost of the materials and supplies. 100% of expenditures committed when the DBE leases trucks from another DBE firm including an owner-operator. 100% of reasonable fees, or commissions, the DBE receives as a result of a lease arrangement for trucks from a non-DBE, including an owner-operator.

- Any combination of the above.

Removal of Approved DBE From Transportation Related Project. Contractors may not terminate for convenience, any approved DBE subcontractor and perform the work with their own forces, without prior written consent from the VTrans DBE Program Manager or VTrans Chief of Civil Rights.

Federal-aid projects which specify a DBE contract goal. The provisions of the Vermont Agency of Transportation Supplemental Specification – Disadvantaged Business Enterprise (DBE) Utilization (CA 160) shall apply to all VTrans Federal-aid projects which specify a DBE contract goal.

Compliance With Prompt Payment Statute. In accordance with Vermont's Prompt Payment Act and VTrans Standard Specifications for Construction, Section 107.01(g), the Contractor shall fully comply with the provisions of 9 V.S.A. Chapter 102, also referred to as Act No. 74 of 1991 or the Prompt Payment Act, as amended.

Subcontractor Payments. In accordance with VTrans Standard Specifications for Construction, Section 107.01(h), on all federal-aid and state funded contracts, the Contractor, during the life of the Contract and on a monthly basis, shall submit electronically, a listing of payments to subcontractors on the form specified by the State and made available at the VTrans Civil Rights website. Electronic reports shall be filed with the Agency Office of Civil Rights by an authorized representative and received in the Agency Office of Civil Rights on or before the tenth working day after month end. Contractors without access to the internet shall obtain and submit manual reports to the Agency Office of Civil Rights. Manual reports shall be signed by an authorized representative, sent to the Agency Office of Civil Rights, and postmarked on or before the tenth working day after month end. There shall be no direct compensation allowed the Contractor for this work, but the cost thereof shall be included in the general cost of the work. In accordance with 9 V.S.A. Section 4003, notwithstanding any contrary agreement, payments made to subcontractors after seven days from receipt of a corresponding progress payment by the State to the Contractor, or seven days after receipt of a subcontractor's invoice, whichever is later, violate this agreement. Violations shall be reported to the Agency Office of Civil Rights for review. Failure to resolve disputes in a timely manner may result in a complaint made to the Agency Pre-qualification Committee. In this Committee's judgment, appropriate penalties may be involved for failure to comply with this specification. Penalties may include suspension, reduction or revocation of the Contractor's pre-qualification rating. This clause shall be included in the prime Contractor's Contract made with all if its subcontractors.

>

General Decision Number: VT150041 01/02/2015 VT41

Superseded General Decision Number: VT20140041

State: Vermont

Construction Type: Highway

County: Rutland County in Vermont.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels; building structures in rest areas; railroad construction; bascule, suspension & spandrel arch bridges; bridges designed for commercial navigation; bridges involving marine construction; and other major bridges)

Note: Executive Order (EO) 13658 establishes an hourly minimum wage of $10.10 for 2015 that applies to all contracts subject to the Davis-Bacon Act for which the solicitation is issued on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least $10.10 (or the applicable wage rate listed on this wage determination, if it is higher) for all hours spent performing on the contract. The EO minimum wage rate will be adjusted annually. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	01/02/2015

* SUVT2011-026 09/14/2011

	Rates	Fringes
CARPENTER, Includes Form Work....	$ 17.11	1.79
CEMENT MASON/CONCRETE FINISHER...	$ 25.34	0.00
ELECTRICIAN, Includes Installation of Traffic Signals.....	$ 21.87	2.95
GUARDRAIL INSTALLER.....	$ 12.93	0.00
IRONWORKER, REINFORCING.....	$ 16.03	2.39
IRONWORKER, STRUCTURAL.....	$ 21.15	15.54
LABORER: Common or General Includes Asphalt Raker and Concrete Work.....	$ 13.16	2.70
LABORER: Flagger.....	$ 9.57	2.99
LABORER: Landscape.....	$ 12.31	1.03

LABORER: Screedman	$ 16.30	4.23
LABORER: Sign Erector/Installer	$ 14.31	4.70
OPERATOR: Asphalt Roller	$ 18.02	4.08
OPERATOR: Backhoe	$ 18.99	1.64
OPERATOR: Bobcat/Skid Steer/Skid Loader	$ 18.03	0.00
OPERATOR: Broom	$ 16.88	3.72
OPERATOR: Bulldozer	$ 19.18	2.56
OPERATOR: Cold Planer/Milling Machine	$ 15.56	0.00
OPERATOR: Crane	$ 20.00	2.13
OPERATOR: Excavator	$ 17.01	1.36
OPERATOR: Grader/Blade	$ 18.44	3.50
OPERATOR: Loader	$ 24.52	9.86
OPERATOR: Mechanic	$ 20.45	0.00
OPERATOR: Paver	$ 16.02	3.94
OPERATOR: Pounder	$ 18.11	0.00
OPERATOR: Roller excluding Asphalt	$ 15.12	4.08
OPERATOR: Screed	$ 17.09	4.44
OPERATOR: Sweeper	$ 24.44	12.24
PAINTER (Parking Lot and Highway Striping Only)	$ 17.08	3.40
TRUCK DRIVER, Includes all axles including Dump Trucks	$ 14.60	3.21
TRUCK DRIVER: Distributor Truck	$ 17.89	0.00
TRUCK DRIVER: Semi/Trailer Truck	$ 14.72	4.39

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate (weighted union average rate).

Union Rate Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than "SU" or "UAVG" denotes that the union classification and rate were prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number where applicable, i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the "SU" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010 08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current negotiated/CBA rate of the union locals from which the rate is based.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage

payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

SUPPLEMENTAL SPECIFICATION
ASPHALT PRICE ADJUSTMENT

GENERAL REQUIREMENTS AND CONDITIONS

(a) This specification contains price adjustment provisions for asphalt cement and emulsified asphalt used on Vermont Agency of Transportation (Agency) construction projects and produced under Sections 303, 404, 406, 415, and 490 of the Standard Specifications, or as otherwise designated in the Contract Documents. This price adjustment clause is being inserted in this Contract to provide for either additional compensation to the Contractor or a payment to the Agency, depending upon an increase or decrease in the average price of asphalt cement during the construction of this project.

(b) Emulsified asphalt shall be subjected to a correction factor of 0.45, applied to the quantity of material supplied. This corrected quantity shall be used for Asphalt Price Adjustment as specified and computed herein.

(c) These provisions apply to this Contract only as specified in the procedures provided herein. No further asphalt cement and/or emulsified asphalt price adjustments will be allowed under this Contract.

(d) It is understood by the Contractor that a price adjustment increase may cause the Agency to decrease the quantities of the Contract pay items subject to adjustment under these provisions. Provisions providing for decreased quantities and item cancellation in this paragraph are separate and take precedence, notwithstanding any other provisions of this Contract.

(e) No price adjustment will be allowed beyond the Contract Completion Date or any applicable interim completion dates.

(f) Any increase in the total Contract amount due to price adjustment under these provisions will not be justification for an extension of time under Subsection 108.11.

(g) The Contractor hereby agrees that its bid prices for this Contract include no allowances for any contingencies to cover increased costs for which adjustment is provided herein.

PRICE ADJUSTMENT PROCEDURES

(1) Prior to advertising for bids, an Index Price for asphalt cement will be established by the Agency upon consideration of the New York State DOT average monthly price for asphalt cement, or other monthly index deemed appropriate by the Director of Finance and Administration. The Index Price will be set monthly on or about the last day of the month. The Contract Index Price will be the most recent Index Price set by the Agency at the time of advertising for bids. This price will be as specified in the Special Provisions and will be the base from which price adjustments are computed.

(2) For the duration of the Contract, Posted Prices for a metric ton (ton) of asphalt cement will be established monthly by the Agency. The Posted Prices will be established in the same manner as the Index Price.

(3) A Price Adjustment will be paid or credited for asphalt cement only when the Posted Price of asphalt cement increases or decreases over its respective Index Price.

(4) The Price Adjustment will be based upon the quantity of asphalt cement (QAC) and quantity of emulsified asphalt (QEA) incorporated in the work, determined as follows:

a. Batch Plants. QAC is determined using the cumulative actual binder content for each applicable item as reported on the batch ticket, excluding any percent of asphalt cement from Recycled Asphalt Pavement (RAP).

b. Drum-Mix Plants. QAC is determined based upon the metric tons (tons) of mix placed, multiplied by the actual binder content reported on the demand tickets, as verified by Agency personnel. In the event of multiple binder contents, the accepted quantity of mix at each binder content shall be determined, and the total QAC used shall be calculated accordingly. The accumulated asphalt cement total on the plant automation may be checked and verified by Agency personnel for each mix.

c. Emulsified Asphalt. QEA is as determined in accordance with Subsection 404.11.

(5) The Price Adjustment to be paid shall be computed as follows:

PA = [(QAC + (ACEA X 0.001 X QEA)) X (PP - IP)] [Metric]

PA = [(QAC + (ACEA X 0.05 X QEA)) X (PP - IP)] [English]

where:

PA = Price Adjustment (LU in $)
IP = Index Price ($/metric ton) or ($/ton)
PP = Posted Price on date of work ($/metric ton) or ($/ton)
QAC = Quantity of Asphalt Cement (metric tons) or (tons)
QEA = Quantity of Emulsified Asphalt (kilograms) or (CWT)
ACEA = Asphalt Content of Emulsified Asphalt as follows:

Emulsified Asphalt Type	ACEA
CSS-1h	0.57
MS-1	0.55
RS-1	0.55
CRS-1p	0.63
CSS-1h Fog	0.28

(6) The Contract bid prices for the applicable pay items will be paid separately under the Contract. The price adjustment will be calculated and paid in the same bi-weekly estimate as the applicable Contract work.

(7) Payments for Price Adjustment, Asphalt Cement shall be debited or credited against the Contract price (Lump Unit) bid for Price Adjustment, Asphalt Cement.

Payment will be made under:

Pay Item	Pay Unit
406.50 Price Adjustment, Asphalt Cement (N.A.B.I.)	Lump Unit

Brady, James

From: Title 19 <DII-SharePointAdmins@state.vt.us>
Sent: Wednesday, June 25, 2014 2:34 PM
To: Slesar, Chris; Goldstein, Lee; Ramsey, Jeff; Brady, James
Cc: Mackenzie, Chet; Borg, Jaron
Subject: ClarendonBRO1443(48) - Title 19 Review

Do not reply to this email.

Project ClarendonBRO1443(48) had been approved by, Jaron Borg 802-371-8342. The following Standard Conditions apply:

Title-19 Standard Conditions:

1. A) The project shall be constructed as defined in the documents linked to the ClarendonBRO1443(48) project in this Title 19 Share Point site. B) Any amendment to the plans which in any way affects surface waters and/or riparian corridors shall be reviewed by this office and approval received by VTrans prior to construction. C) Any construction modifications that deviate from the approved plans which in any way affects surface waters and/or riparian corridors shall be reviewed by this office and approval received by VTrans prior to the construction activity.
2. That the contractor's schedule of accomplishment of water quality related work to be submitted prior to the start of construction, and as required under general specification #105.23(a) shall include site-specific methods of operation. Temporary construction fills, check dams, silt barriers and other erosion control works shall be described and shown on pertinent plans.
3. That the Vermont Agency of Transportation general specification #105.23 addressing the control of erosion and siltation be carefully adhered to in order to minimize turbidity and other adverse impacts.
4. That the Vermont Agency of Transportation general specification #105.24 addressing pollution control be carefully followed in order to limit, if not prevent altogether, the discharge of fuel, grease, oil, raw concrete, paint, chemicals, and debris to any waters of the state.
5. An on-site pre-construction conference between the contractor, VTrans Resident Engineer and the River Management Engineer (Jaron Borg) shall be held prior to commencement of any in-stream construction. Please contact the ANR River Management Engineer listed at the top of this email to schedule the conference.
6. Approved in-stream working dates on this project are from July 1st to October 1st. Contractor proposals for construction activities in or adjacent to flowing water during the restricted period must be isolated from stream flow and must receive prior approval from the River Management Engineer.
7. The provisions of this approval shall be made a part of the construction contract.

ANR Permit Number: HD-1-0447

(5)

DEPARTMENT OF THE ARMY
US ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT
696 VIRGINIA ROAD
CONCORD MA 01742-2751

July 23, 2014

Regulatory Division
CENAE-R-PEC-63
Permit Number: NAE-2014-1203

Vermont Agency of Transportation
ATTN: Mr. Glenn Gingras
One National Life Drive
Montpelier, Vermont 05633-5001

Dear Mr. Gingras:

We have reviewed your application to place fill in a total of about 3,816 sq. ft. (0.09 acre) of the Clarendon River and adjacent wetlands in conjunction with the replacement, on existing alignment, of Bridge No. 11 on TH 3 in Clarendon, Vermont. The work is shown on the attached plans, in seven sheets, entitled "CLARENDON BRO 1443(48)" (dated "6/24/2014", "30-MAY-2014", "08-JUL-2014" and "03-JUL-2014").

Based on the information you have provided, we have determined that the proposed activity, which includes a discharge of dredged or fill material into waters or wetlands, will have only minimal individual or cumulative environmental impacts on waters of the United States, including wetlands. Therefore, this work is authorized as a Category 2 activity under the attached Federal permit known as the Vermont General Permit (GP). This work must be performed in accordance with the terms and conditions of the GP **and also in compliance with the following special condition:**

The Stipulations and Standard Mitigation Measures of the attached February 07, 2013 Adverse Effect Determination by the Vermont Agency of Transportation are hereby made a part of this permit.

You are responsible for complying with all of the GP's requirements. Please review the attached GP carefully, in particular the GP conditions beginning on Page 7, to familiarize yourself with its contents. You should ensure that whoever does the work fully understands the requirements and that a copy of the permit document AND THIS AUTHORIZATION LETTER ARE at the project site throughout the time the work is underway.

This authorization expires on December 6, 2017, unless the GP is modified, suspended, or revoked. You must commence or have under contract to commence the work authorized herein by December 6, 2017 and complete the work by December 6, 2018. If you do not, you must contact this office to determine the need for further authorization before beginning or continuing the activity.

If you change the plans or construction methods for work in our jurisdiction, please contact us immediately to discuss modification of this authorization. This office must approve any changes before you undertake them.

This authorization requires you to complete and return the enclosed Work Start Notification Form to this office before the anticipated starting date. You must also complete and return the enclosed Compliance Certification Form within one month following the completion of the authorized work.

This authorization presumes that the work as described above and as shown on your plans noted above is in waters of the U.S. Should you desire to appeal our jurisdiction, please submit a request for an approved jurisdictional determination in writing to this office.

This permit does not obviate the need to obtain other Federal, state, or local authorizations required by law, as listed on Page 2 of the GP. Performing work not specifically authorized by this determination or failing to comply with any special condition(s) provided above or all the terms and conditions of the GP may subject you to the enforcement provisions of our regulations.

We continually strive to improve our customer service. In order for us to better serve you, we would appreciate your completing our Customer Service Survey located at http://corpsmapu.usace.army.mil/cm_apex/f?p=regulatory_survey

Please contact Angela C. Repella of my staff at (802) 872-2893 if you have any questions.

Sincerely,

Frank J. DelGiudice
Chief, Permits & Enforcement Branch
Regulatory Division

Attachments

Copies Furnished:
Mr. Jaron Borg
Vermont Department of Environmental Conservation
jaron.borg@state.vt.us

Mr. Glenn Gingras
Vermont Agency of Transportation
Glenn.Gingras@state.vt.us

Map Name: WEST RUTLAND
Scale: 1 inch = 2,000 ft.

Map Center: 043° 32' 57.42" N 073° 01' 25.63" W
Horizontal Datum: NAD27

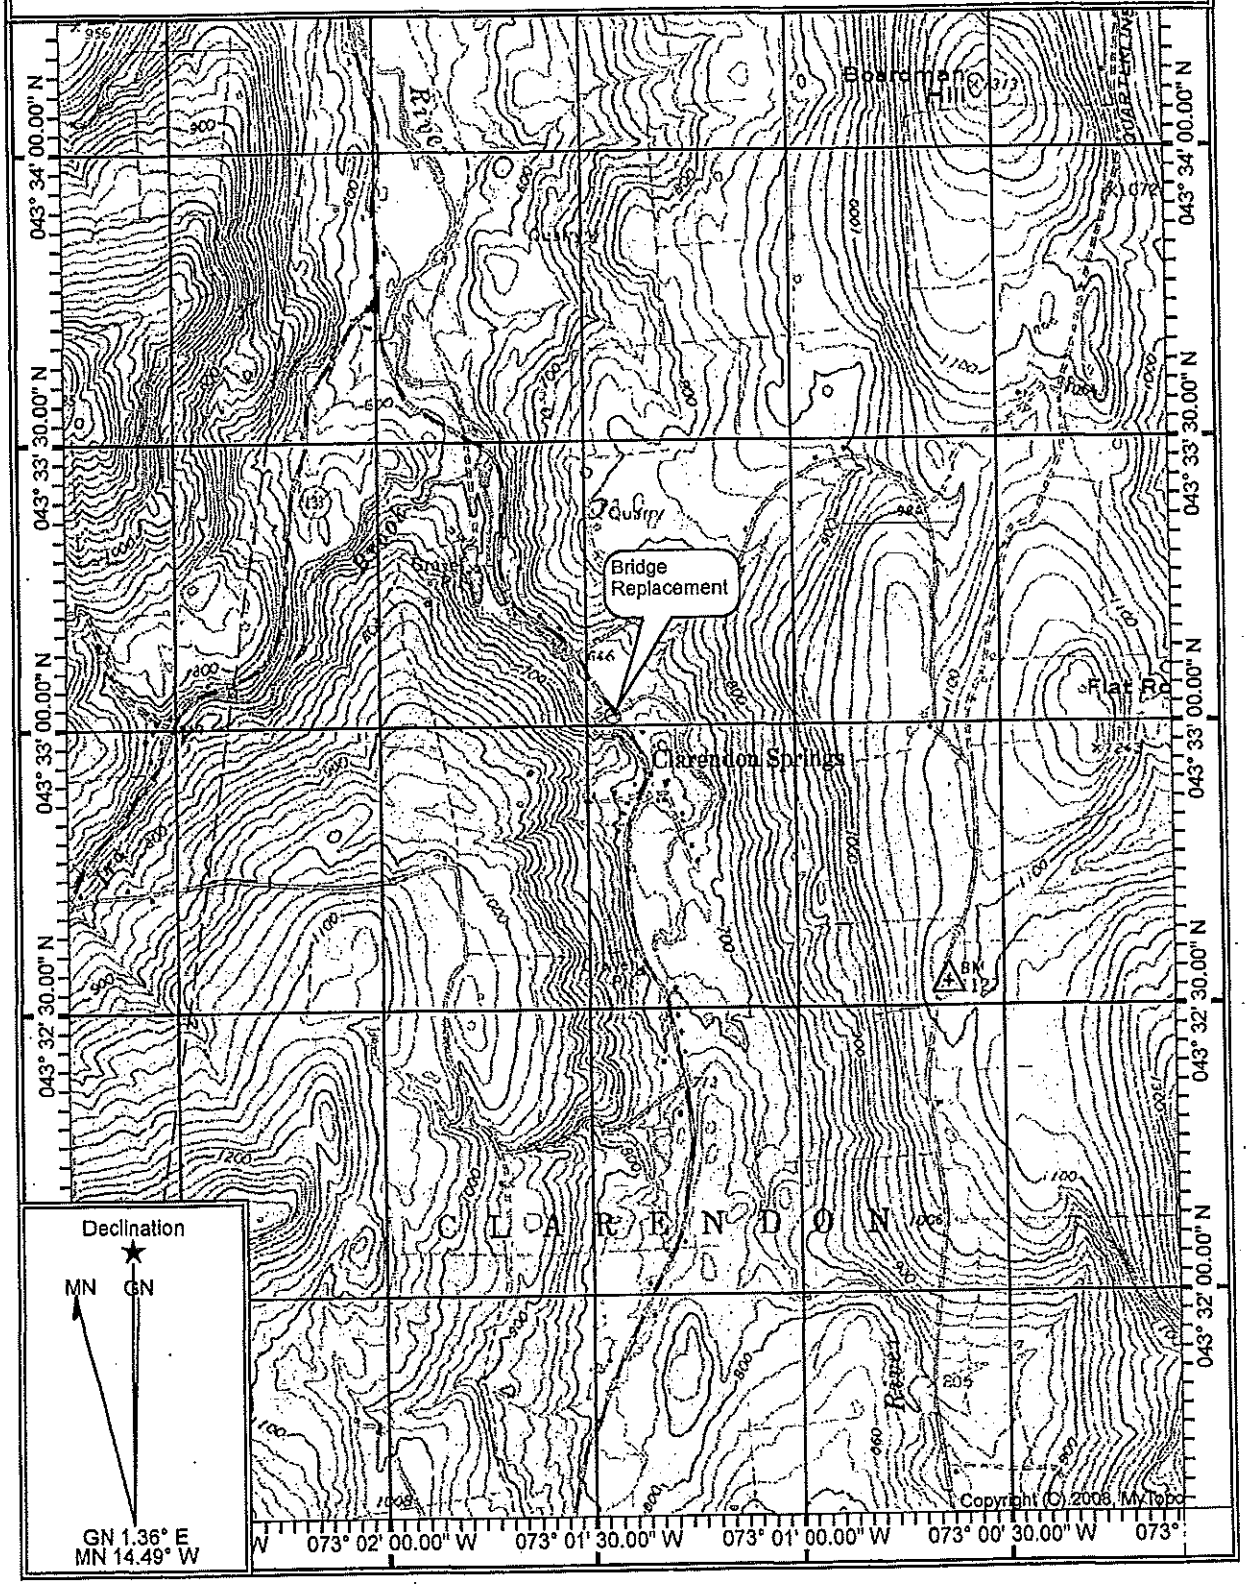

SCALE 1:24000

0 1000 2000 3000 4000 5000 6000 7000
FEET

CLARENDON BRO 1443(48)
CLARENDON RIVER, TH 3

6/24/2014

REVIEWER NOTES

1) A SIMPLIFIED PAVEMENT DESIGN HAS BEEN DONE FOR THIS PROJECT.

2) CONSTRUCTION ACTIVITIES SHOULD LAST APPROXIMATELY 3 MONTHS.

3) A FOUR WEEK CLOSURE WITH A TOWN SELECTED, SIGNED, AND MAINTAINED DETOUR IS ASSUMED DURING CONSTRUCTION.

4) CONSTRUCTION CAN PROCEED 24 HOURS PER DAY, 7 DAYS PER WEEK DURING THE CLOSURE PERIOD.

5) INCENTIVE/DISINCENTIVE CONTRACTING IS PROPOSED TO KEEP THE CLOSURE PERIOD AS SHORT AS POSSIBLE.

STATE OF VERMONT
AGENCY OF TRANSPORTATION

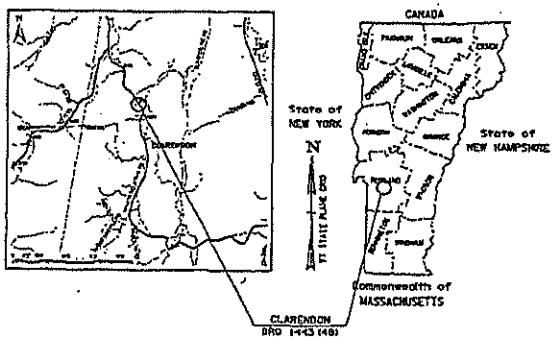

PROPOSED IMPROVEMENT
BRIDGE PROJECT

TOWN OF CLARENDON

COUNTY OF RUTLAND

ROUTE NO : TH 3 (CLASS 2), RURAL COLLECTOR BRIDGE NO : 11

PROJECT LOCATION : 1.05 MILES SOUTH OF THE INTERSECTION OF TH 3 AND VT RT 133

PROJECT DESCRIPTION : REPLACEMENT OF BRIDGE 11 WITH A NEW PRECAST CONCRETE STRUCTURE WITH RELATED APPROACH AND CHANNEL WORK.

LENGTH OF STRUCTURE : 76.70 FEET.
LENGTH OF ROADWAY : 98.30 FEET.
LENGTH OF PROJECT : 175.00 FEET.

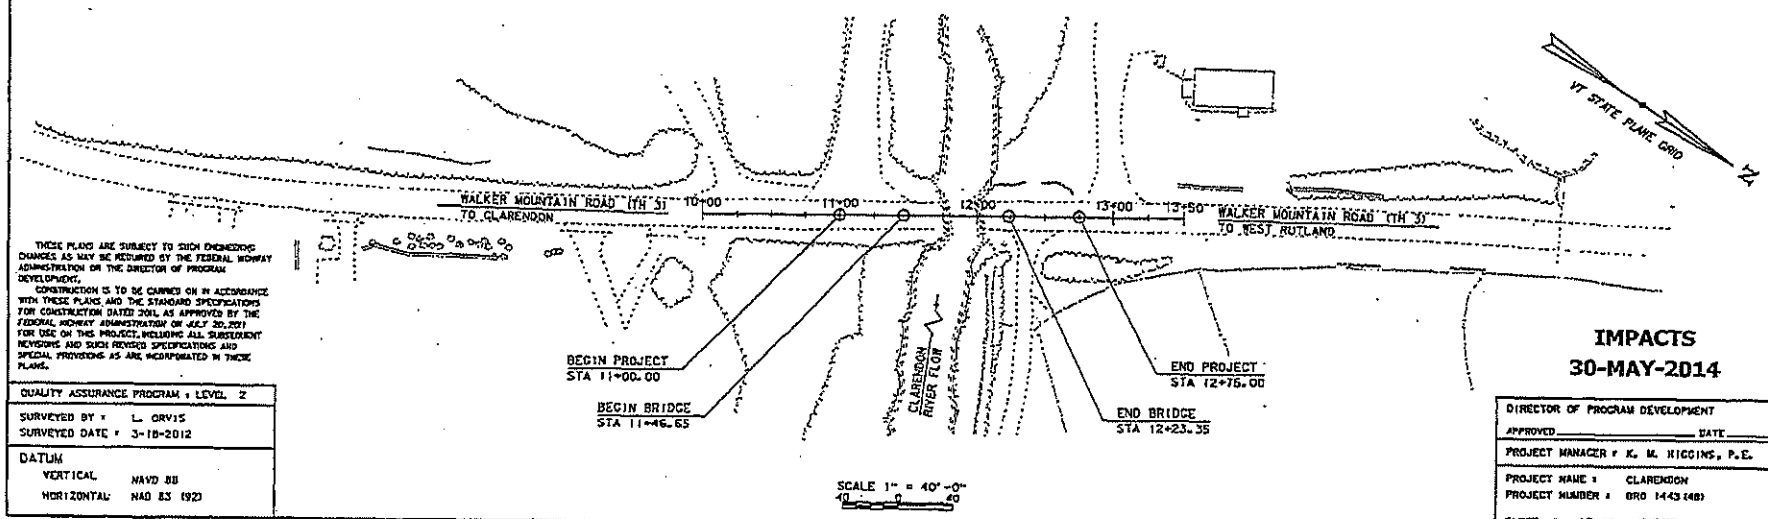

THESE PLANS ARE SUBJECT TO SUCH ENGINEERING CHANGES AS MAY BE REQUIRED BY THE FEDERAL HIGHWAY ADMINISTRATION OR THE DIRECTOR OF PROGRAM DEVELOPMENT.

CONSTRUCTION IS TO BE CARRIED ON IN ACCORDANCE WITH THESE PLANS AND THE STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 2011, AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION ON JULY 20, 2011 FOR USE ON THIS PROJECT, INCLUDING ALL SUBSEQUENT REVISIONS AND SUCH REVISED SPECIFICATIONS AND SPECIAL PROVISIONS AS ARE INCORPORATED IN THESE PLANS.

QUALITY ASSURANCE PROGRAM : LEVEL 2

SURVEYED BY : L. ORVIS
SURVEYED DATE : 3-18-2012

DATUM
VERTICAL: NAVD 88
HORIZONTAL: NAD 83 (92)

IMPACTS
30-MAY-2014

DIRECTOR OF PROGRAM DEVELOPMENT
APPROVED _____ DATE _____

PROJECT MANAGER : K. M. HIGGINS, P.E.

PROJECT NAME : CLARENDON
PROJECT NUMBER : BRO 1443 (48)

SHEET 1 OF 16 SHEETS

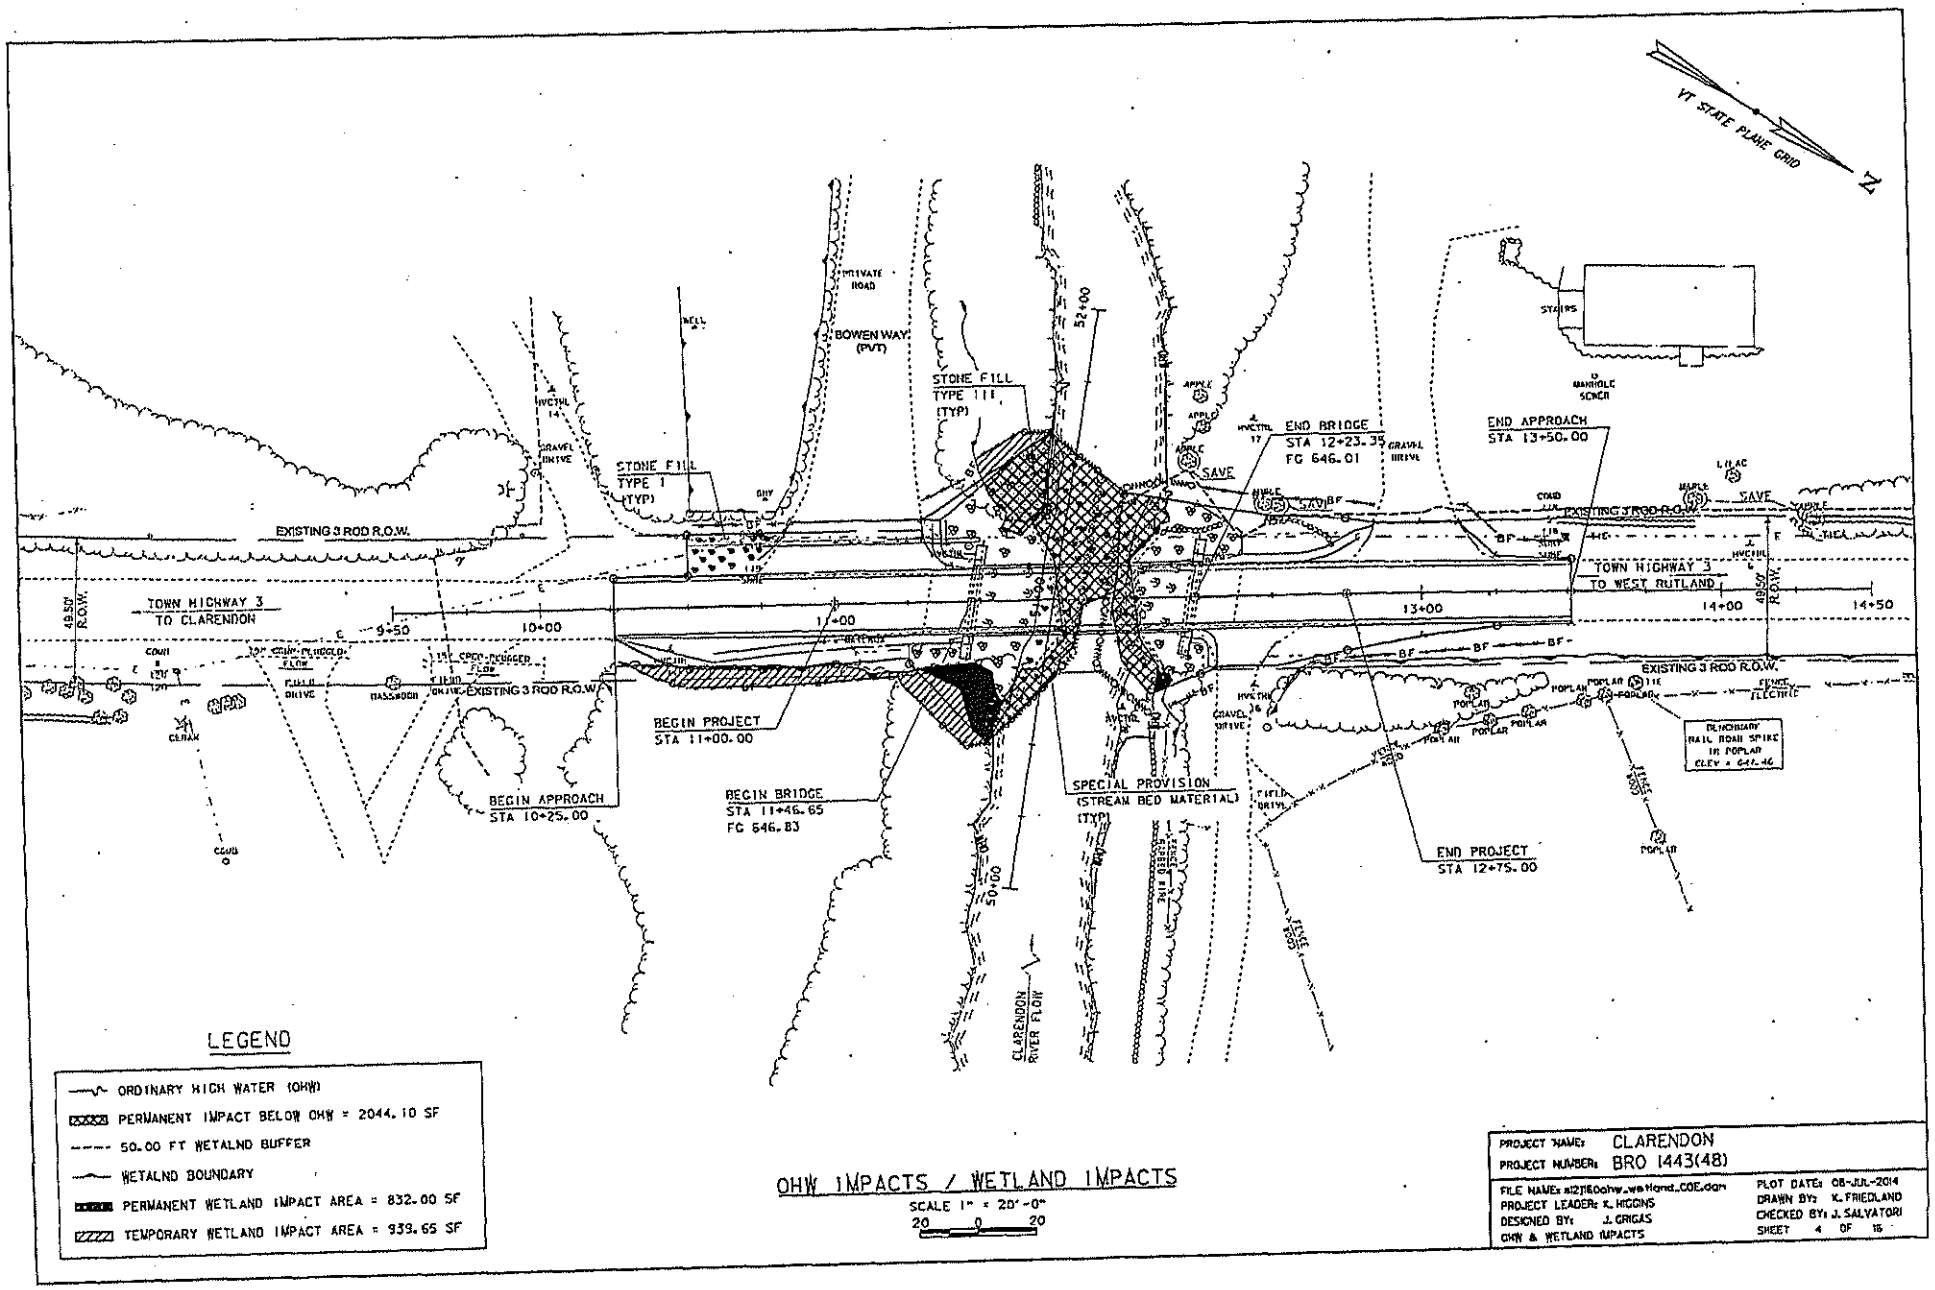
VT STATE PLANE GRID
N
PRIVATE ROAD
BOWEN WAY (PVT)
STONE FILL TYPE I (TYP)
STONE FILL TYPE III (TYP)
END BRIDGE STA 12+23.35 FG 646.01
END APPROACH STA 13+50.00
STAIRS
MANHOLE SEWER
EXISTING 3 ROD R.O.W.
TOWN HIGHWAY 3 TO CLARENDON
TOWN HIGHWAY 3 TO WEST RUTLAND
49.50' R.O.W.
9+50
10+00
11+00
13+00
14+00
14+50
52+00
50+00
BEGIN PROJECT STA 11+00.00
BEGIN APPROACH STA 10+25.00
BEGIN BRIDGE STA 11+46.65 FG 646.83
SPECIAL PROVISION (STREAM BED MATERIAL) (TYP)
END PROJECT STA 12+75.00
CLARENDON RIVER FLOW
BENCHMARK RAIL ROAD SPIKE IN POPLAR
LEGEND
ORDINARY HIGH WATER (OHW)
PERMANENT IMPACT BELOW OHW = 2044.10 SF
50.00 FT WETALND BUFFER
WETALND BOUNDARY
PERMANENT WETLAND IMPACT AREA = 832.00 SF
TEMPORARY WETLAND IMPACT AREA = 939.65 SF
OHW IMPACTS / WETLAND IMPACTS
SCALE 1" = 20'-0"
20 0 20
PROJECT NAME: CLARENDON
PROJECT NUMBER: BRO 1443(48)
FILE NAME: s12j160ohw_wetland_COE.dgn
PROJECT LEADER: K. HIGGINS
DESIGNED BY: J. GRIGAS
OHW & WETLAND IMPACTS
PLOT DATE: 08-JUL-2014
DRAWN BY: K. FRIEDLAND
CHECKED BY: J. SALVATORI
SHEET 4 OF 16

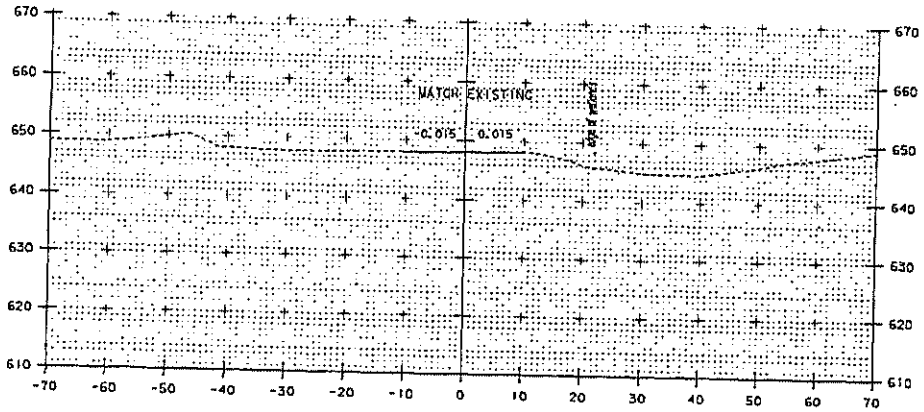

10+25
BEGIN APPROACH

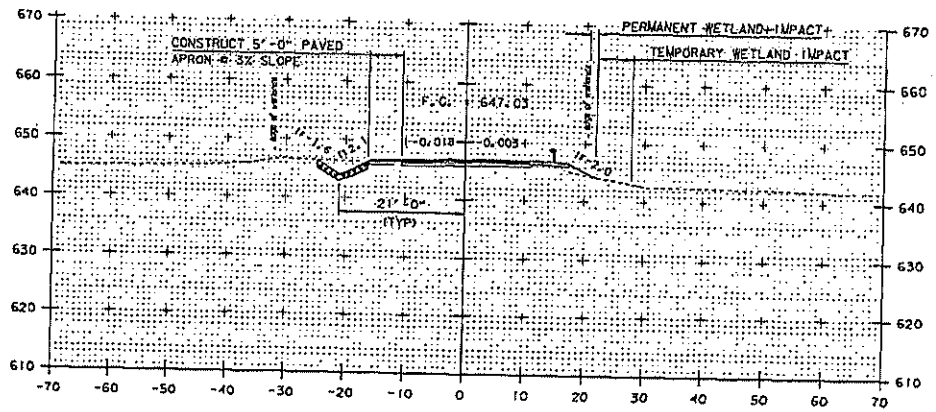

10+75

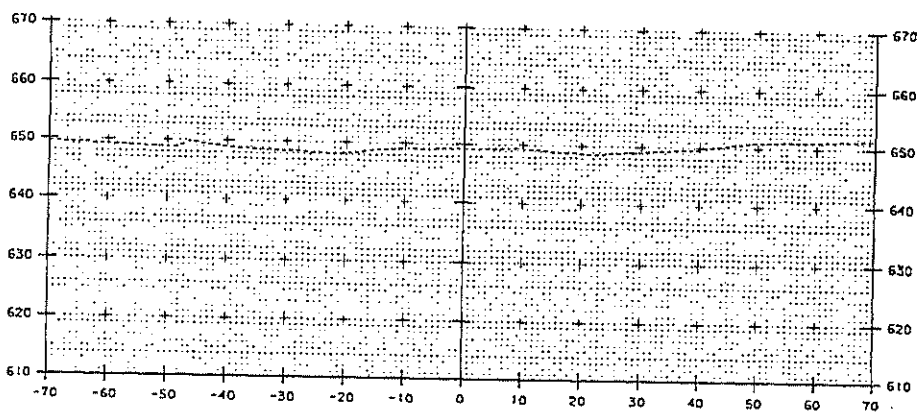

10+00

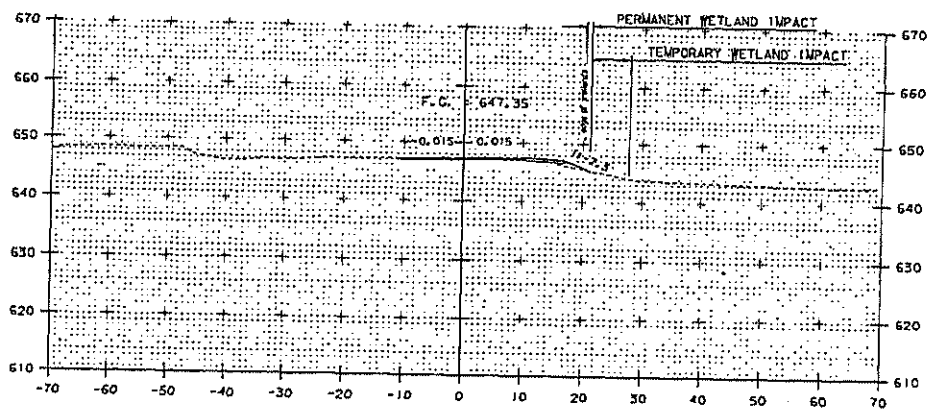

10+50

STA. 10+00 TO STA. 10+75

PROJECT NAME: CLARENDON
PROJECT NUMBER: BRO 1443(48)

FILE NAME: s12160xs.dgn
PROJECT LEADER: K. HIGGINS
DESIGNED BY: J. GRIGAS
MAINLINE CROSS SECTIONS 1

PLOT DATE: 03-JUL-2014
DRAWN BY: J. GRIGAS
CHECKED BY: G. LAROCHE
SHEET 9 OF 16

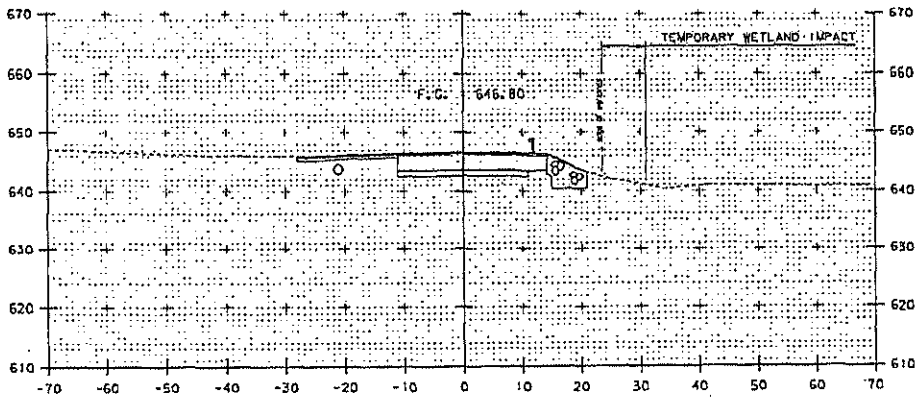

11+25

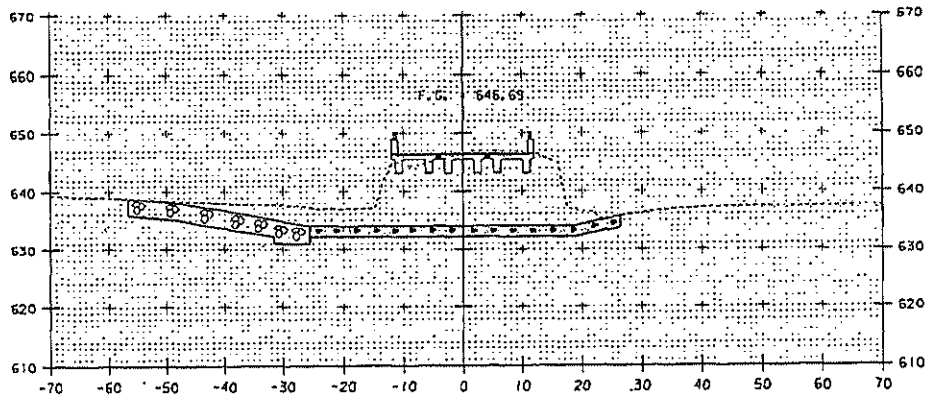

11+75

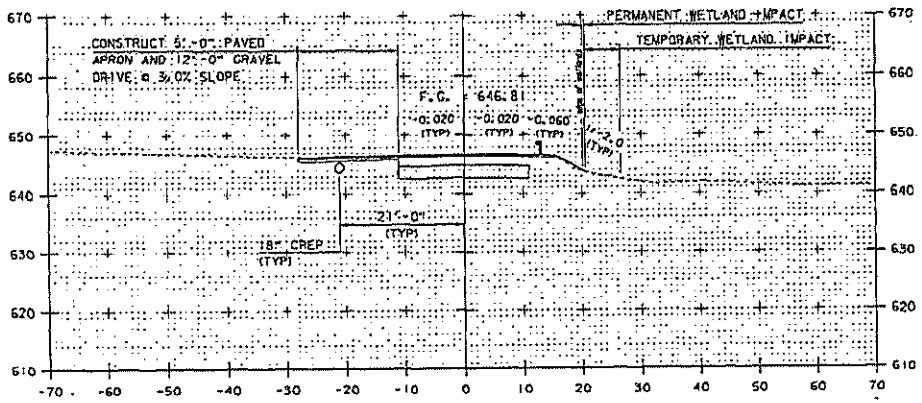

11+00
BEGIN PROJECT

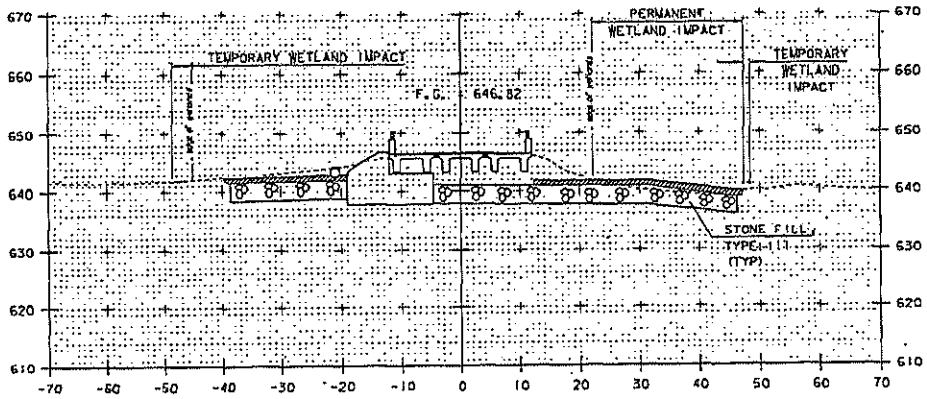

11+50
BEGIN BRIDGE 11+46.65

STA. 11+00 TO STA. 11+75

PROJECT NAME: CLARENDON	
PROJECT NUMBER: BRO 1443(48)	
FILE NAME: s12160xs.dgn	PLOT DATE: 03-JUL-2014
PROJECT LEADER: K. HIGGINS	DRAWN BY: J. GRIGAS
DESIGNED BY: J. GRIGAS	CHECKED BY: G. LAROCHE
MAINLINE CROSS SECTIONS 2	SHEET 10 OF 15

STA 50+83.33 LT
END GRUBBING MATERIAL

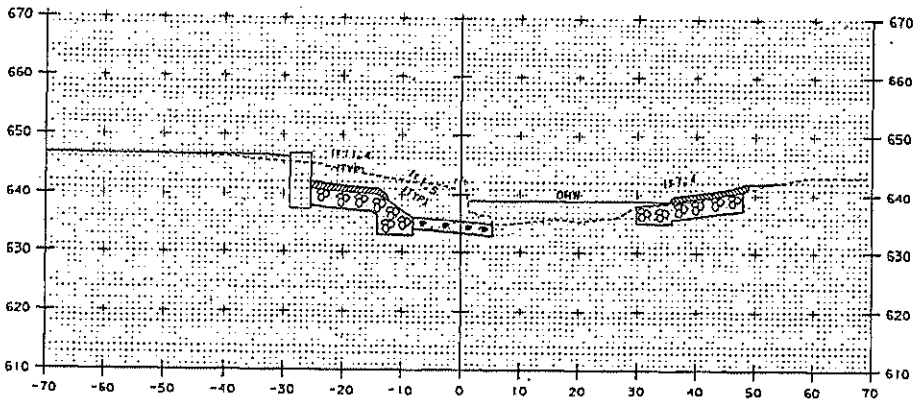

50+80

STA 51+07.70 LT
BEGIN GRUBBING MATERIAL

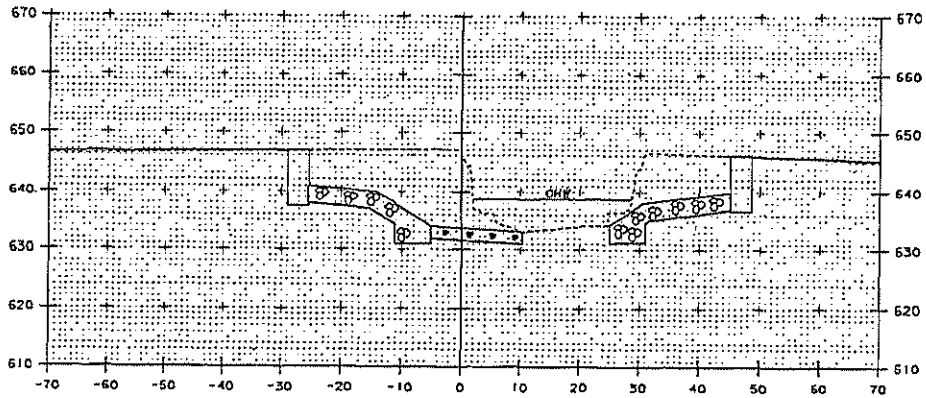

51+00

STA 50+76.77 RT
BEGIN UNCLASSIFIED CHANNEL EXCAVATION
BEGIN GEOTEXTILE UNDER STONE FILL
BEGIN STONE FILL, TYPE III
BEGIN GRUBBING MATERIAL

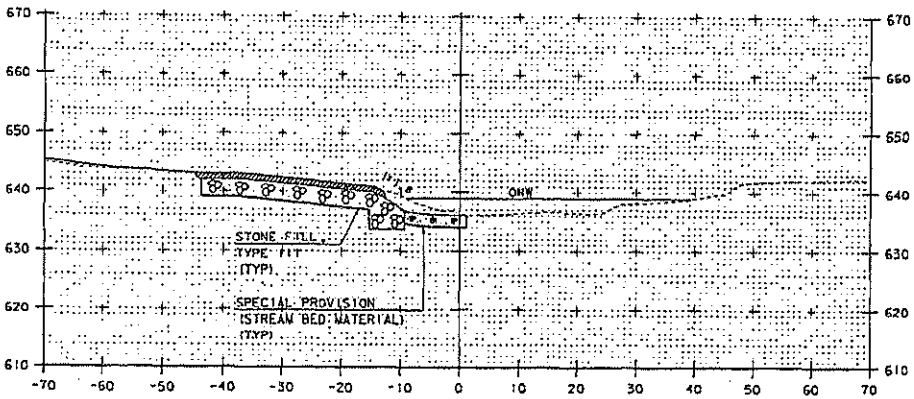

50+70

STA 50+91.83 RT
END GRUBBING MATERIAL

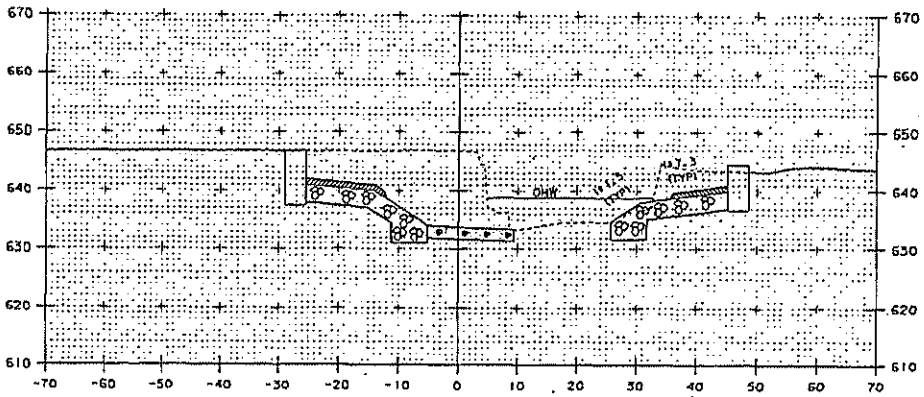

50+90

PROJECT NAME: CLARENDON	
PROJECT NUMBER: BRO 1443(48)	
FILE NAME: s12080xs.dgn	PLOT DATE: 03-JUL-2014
PROJECT LEADER: K. HIGGINS	DRAWN BY: J. GRIGAS
DESIGNED BY: J. GRIGAS	CHECKED BY: G. LAROCHE
CHANNEL CROSS SECTIONS 2	SHEET 14 OF 16

STA. 50+70 TO STA. 51+00

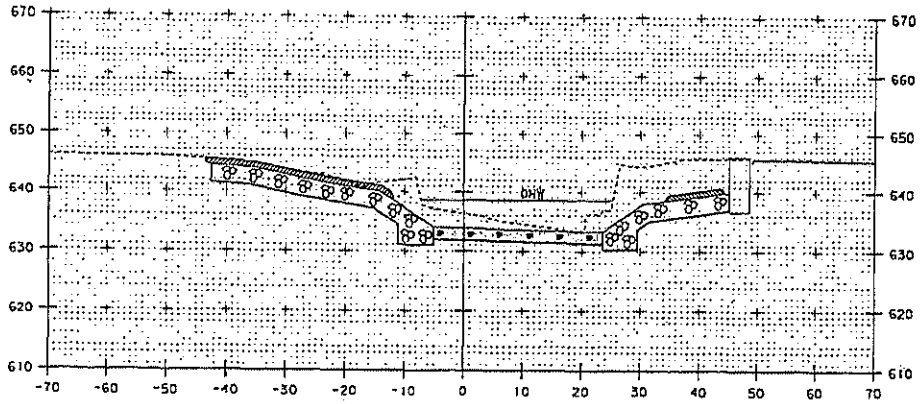

51+20

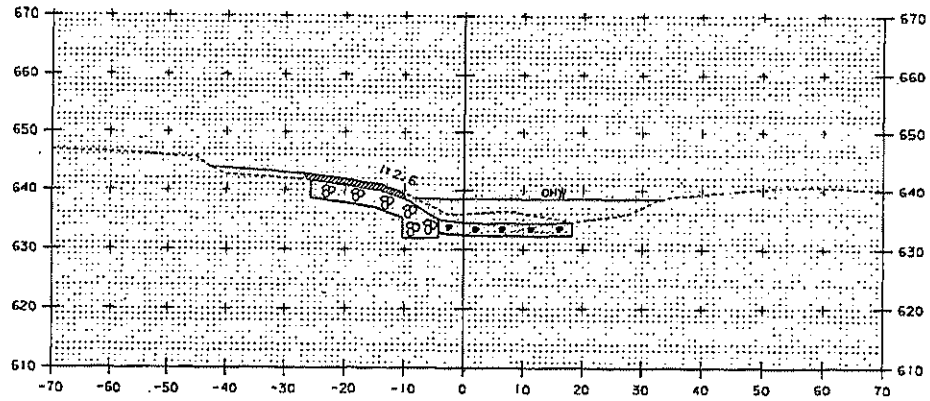

51+40

STA 51+39.73 RT
END UNCLASSIFIED CHANNEL EXCAVATION
END GEOTEXTILE UNDER STONE FILL
END STONE FILL, TYPE III
END GRUBBING MATERIAL

STA 51+15.53 RT
BEGIN GRUBBING MATERIAL

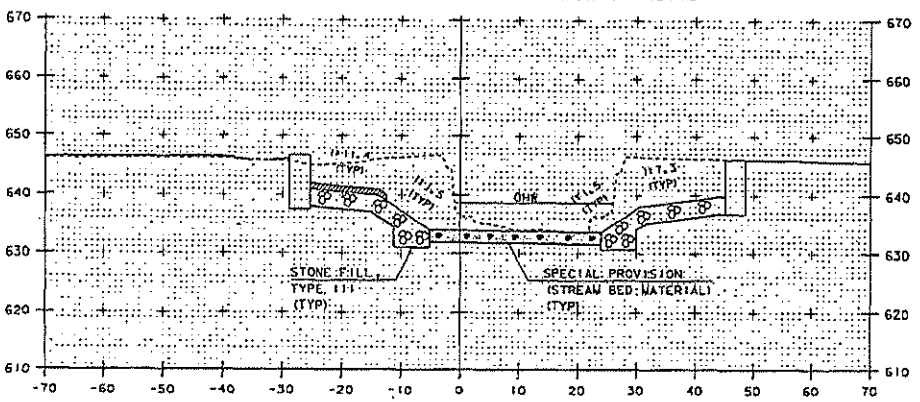

51+10

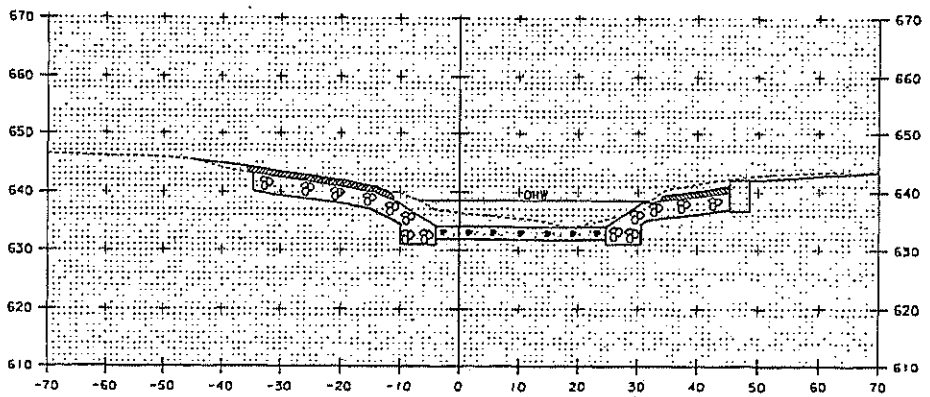

51+30

STA. 51+10 TO STA. 51+40

PROJECT NAME: CLARENDON	
PROJECT NUMBER: BRO 1443(48)	
FILE NAME: s:\2\160xs.dgn	PLOT DATE: 03-JUL-2014
PROJECT LEADER: K. HIGGINS	DRAWN BY: J. GRIGAS
DESIGNED BY: J. GRIGAS	CHECKED BY: G. LAROCHE
CHANNEL CROSS SECTIONS 3	SHEET 15 OF 16

General Permit No: NAE-2012-1167
Applicant: General Public in the State of Vermont

Effective Date: December 6, 2012
Expiration Date: December 6, 2017

DEPARTMENT OF THE ARMY
GENERAL PERMIT
STATE OF VERMONT

The New England Division of the U.S. Army Corps of Engineers (Corps) hereby issues this General Permit (GP) that expedites review of minimal environmental impact work associated with the aquatic environment of navigable and inland waters and wetlands within the State of Vermont. This general permit for Vermont is known as the Vermont General Permit.

I. GENERAL CRITERIA:

Activities with **minimal impacts**, as specified by this GP's terms (Pages 1-6), general conditions (GC) (Pages 7-16) and Appendix A - Definition of Categories, qualify for authorization under the GP in either Category 1 or Category 2.

Proponents should first review Appendix A - Definition of Categories to see if a project meets either:

- Category 1: Self-Verification, Category 1 Notification Form required
  Projects meeting Category 1 criteria and which are in full compliance with the general conditions may be authorized under this GP after submission of the Category 1 Notification Form.
- Category 2: Reporting.
  An application to and written verification from the Corps is required for these projects.

If you determine that your project is eligible for Category 1 as defined in Appendix A, you must then ensure that your project is in full compliance with this GP's terms and general conditions. If any of these terms and conditions are not met, your project must be reviewed in the Category 2 or the Individual Permit category. The Individual Permit thresholds are defined in Appendix A and the Individual Permit procedures are briefly described on Page 6. This GP does not affect the Corps Individual Permit review process or activities exempt from Corps regulation.

II. ACTIVITIES COVERED:

- Work and structures that are located in, under, or over any navigable water of the United States[1], the excavating from or depositing of material in such waters, or the accomplishment of any other work affecting the course, location, condition, or capacity of such waters (regulated by the Corps under Section 10 of the Rivers and Harbors Act of 1899); and

- The discharge of dredged or fill material into waters of the U.S. [regulated by the Corps under Section 404 of the Clean Water Act (CWA)]. This GP also covers secondary impacts[2], which are effects on an aquatic ecosystem that are associated with a discharge of dredged or fill materials, but do not result from the actual placement of the dredged or fill material. The Corps does not regulate secondary impacts unless there is an actual placement of dredged or fill material.

[1] Waters of the U.S., inland waters and wetlands, and navigable waters of the U.S. are defined at Appendix A, Endnotes/Definitions.
[2] See GC 3 on Page 7 and Appendix A, Endnote 4 for more information on secondary impacts.

Eligibility
Activities in Vermont that are:

- Subject to Corps jurisdiction;
- Meet the definition of Category 2 in Appendix A; and
- Meet the general conditions of this GP (Pages 7-16)

require written approval from the Corps. These projects will be reviewed through interagency screening to determine whether such activities may be authorized under this GP. **To be eligible and subsequently authorized, an activity must result in no more than a minimal impact to the aquatic environment as determined by the Corps in coordination with the interagency review team, in addition to meeting the criteria listed above.**

This may require project modifications involving avoidance, minimization or compensatory mitigation[3] for unavoidable impacts to ensure the net effects of a project are minimal.

To ensure compliance with this GP's general conditions, consultation with the Corps, other Federal or State resource agencies, or independent consultants, may be necessary. This includes consultation with the VT State Historic Preservation Officer (VT SHPO) (Page 16) and, when projects are proposed in Addison, Rutland or Bennington counties, the Stockbridge-Munsee Tribal Historic Preservation Officer (THPO) to ensure compliance with GC 7 and the VT ANR to comply with applicable general conditions. Also, note the review thresholds under Category 2 apply to single and complete projects only (see GC 5).

Application Procedures
Applicants must apply directly to the Corps at the Vermont Project Office (VPO), and are encouraged to simultaneously apply to the VT ANR for any related permits. Upon receipt of an application for a Category 2 activity, the Corps will determine if it:

(1) Requires additional information;
(2) Is appropriate for screening with the Federal resource agencies and State agencies (see Screening Procedures);
(3) Is ineligible under the terms and/or conditions of this GP;
(4) Requires project modification, mitigation or other special conditions to minimize impacts and protect the aquatic environment to be eligible for this GP; or
(5) Requires Individual Permit review regardless of whether the terms and conditions of this GP are met, based on concerns for the aquatic environment or any other factor of the public interest (GC 4).

Information Typically Required
In order to consider an application complete and review it with the interagency review team, the applicant must submit complete information. Please see www.nae.usace.army.mil for a more comprehensive checklist. Select "Regulatory", "Permits" "Forms" and then "Application and Plan Guideline Checklist." This information includes, but is not limited to:

- A completed Corps application form (ENG Form 4345[4])
- Plans that illustrate the proposed work in reference to the limits of Corps jurisdiction as applicable. Plans should be on 8.5" x 11" paper and contain all other appropriate information.
- A description of the proposed work, project purpose and location, including a locus map and photographs,

[3] Compensatory mitigation for waterway/wetland impacts may take the form of payment into the Ducks Unlimited In-Lieu Fee Program, wetland restoration, enhancement, creation, and/or preservation. See www.nae.usace.army.mil/regulatory, "Mitigation" and then "Vermont" for more information.

[4] Located at www.nae.usace.army.mil/regulatory under "Forms."

general conditions of the GP are met, or a request for a site visit.

Federal resource agency additional information requests shall be within their area of expertise, commensurate to the level of impact, and agreed upon by the Corps. If additional information is requested, the agencies are allowed an additional 10 business days after receipt of this information to provide recommendations for modifications, mitigation or special conditions. Unless additional information is requested, the verbal notice must be confirmed with a written response to the appropriate Corps project manager at the VPO within an additional 10 working days from the date of the verbal comment.

The Corps may contact the applicant either by phone or in writing if there are concerns. If the applicant is unable to resolve the concerns or modify the project, the Corps may determine that a project is ineligible under this GP, "kickout" the project to the Individual Permit review category, and begin its Individual Permit review procedures. The Corps will send a "Kickout Letter" to the applicant and copy the VT ANR and the commenting Federal resource agency on any written correspondence to the applicant. The Corps may reinstate a project's eligibility under the GP provided concerns are satisfied.

The VT ANR within 10 business days of the date the project information is received from the Corps may require an Individual 401 WQC review for any Category 2 project. This 10-day notice to the Corps of the requirement for an individual 401 WQC review may be verbal and is not required to be fully documented, but must be directed to the appropriate Corps Project Manager at the VPO. The VT ANR must confirm the requirement for an individual 401 WQC review with a written response to the appropriate Corps project manager within an additional 10 working days from the date of the verbal comment. If the VT ANR does not notify the Corps as outlined herein, WQC is conditionally granted for the project. In order for the Corps GP authorization to be valid, the WQC must be obtained or waived prior to the commencement of work.

If the Corps and Federal resource agencies determine that the activity is eligible for the GP, the Corps will send an authorization letter directly to the applicant. The Corps will generally issue an eligibility determination within 60 days from the date of a complete application. If the Corps determines that the activity is not eligible under the GP or that additional information is required, the Corps will notify the applicant in writing and will send a copy of this notification to VT ANR.

Emergency Situation Procedures

Emergency situations are limited to sudden, unexpected occurrences that could potentially result in an unacceptable hazard to life, a significant loss of property, or an immediate, unforeseen, and significant economic hardship if corrective action requiring a permit is not undertaken within a time period less than the normal time needed to process an application under standard procedures. If an emergency situation requires action in less than 30 days after the occurrence, it qualifies for the amended notification procedures described below.

Notification Procedures for Emergency Situations: The Federal resource agencies, VT ANR and the VT SHPO will each designate an alternate to be contacted in the event the regular contact is unavailable. The VT ANR, VT Emergency Management (VTEM) or FEMA will notify the Corps within 24 hours of the occurrence of a disaster and advise the Corps of the nature of the occurrence and any known remedial and/or protective measures. The Corps will notify agency representatives that a disaster has occurred within one working day of being notified by the VT ANR, VTEM or FEMA.

When an application for Category 2 work is received that the Corps VPO determines is an "emergency" as defined above, the Corps will e-mail or fax a copy of the plans and DOE to the agency representatives and their alternates. The resource agencies would then have 16 working hours to notify the Corps if they have any comments on authorization of the project under the GP. Objections to the Corps determination of an "emergency" situation will not be accepted. If no response is received at the VPO within 16 working hours, the Corps will proceed with a decision on the application. If the resource agencies have comments on the proposal,

V. GENERAL CONDITIONS (and supporting general information):

The following conditions apply to activities authorized under this GP, including all Category 1 (self-verification) and Category 2 (screening) activities:

General Requirements:

1. **Other Permits.** Authorization under this general permit does not obviate (i.e., to make unnecessary) the need to obtain other Federal, state, or local authorizations required by law.

2. **Federal Jurisdictional Boundaries.** Applicability of this GP shall be evaluated with reference to Federal jurisdictional boundaries. Applicants are responsible for ensuring that the boundaries depicted on permit drawings satisfy the Federal criteria defined at 33 CFR 328-329. See www.nae.usace.army.mil/regulatory>> Jurisdictional Limits and Wetlands for more information.

3. **Minimal Effects, Secondary (Indirect) and Cumulative Impacts.** (a) Projects authorized by this GP shall have no more than minimal individual and cumulative environmental impacts as determined by the Corps. Applicants must demonstrate that there will be no more than minimal direct and indirect impacts to the aquatic resource(s) resulting from the project. Mitigation may be required to offset unavoidable impacts. (b) Secondary impacts to waterway and/or wetland areas, (e.g., areas drained, flooded, cleared, excavated or fragmented) shall be added to the total fill area when determining the project review category (Category 1, 2 or Individual Permit review). Secondary and cumulative impacts are defined at Appendix A, Endnote 4.

4. **Discretionary Authority.** Notwithstanding compliance with the terms and general conditions of this GP, the Corps retains discretionary authority to require either a Category 2 or an Individual Permit review based on concerns for the aquatic environment or for any other factor of the public interest (33 CFR 320.4(a)). This authority is invoked on a case-by-case basis whenever the Corps determines that the potential impacts of the proposal warrant either a Category 2 or an Individual Permit review based on the concerns stated above. This authority may be invoked for projects with cumulative environmental impacts that are more than minimal or if there is a special resource or concern associated with a particular project that is not already covered by the remaining conditions of the GP and that warrants greater review. Whenever the Corps notifies an applicant that either a Category 2 or Individual Permit review is required, authorization under this GP is void and no work may be conducted until the Corps issues the required authorization or until the Corps notifies the applicant that further review has demonstrated that the work may proceed under this GP.

5. **Single and Complete Projects.** This GP shall not be used for piecemeal work and shall be applied to single and complete projects. All components of a single project and/or all planned phases of a multi-phased project shall be treated together as constituting one single and complete project, unless the Corps determines that a component has independent utility. For linear projects, such as power lines or pipelines with multiple crossings, the "single and complete project" (i.e., single and complete crossing) will apply to each crossing of a separate water of the U.S. (i.e., single waterbody) at that location; except that for linear projects crossing a single waterbody several times at separate and distant locations, each crossing is considered a single and complete project, and may be reviewed for Category 1 eligibility. However, individual channels in a braided stream or river, or individual arms of a large, irregularly-shaped wetland or lake, etc., are not separate waterbodies. If any crossing requires a Category 2 activity, then the entire linear project shall be reviewed as one project under Category 2 provided that the impact thresholds in Appendix A are met. Also, this GP shall not be used for any activity that is part of an overall project for which an Individual Permit is required, unless the Corps determines the activity has independent utility. Note that modifications to State permits do not constitute a separate project. Modifications which involve Corps jurisdiction will be screened at the regular screening in order to ascertain compliance with the GP. Keep in mind that a linear project normally qualifying as a Category 1 project will trigger a Corps review if the impacts exceed this GP's general conditions.

d. Applicants should also provide information on state threatened and endangered species. The Information Typically Required section on Page 3 provides guidance. Contact information for the VT ANR, Department of Fish & Wildlife, Nongame and Natural Heritage program is provided on Pages 16-17, and more information is provided at Additional References, Pages 18-19.

10. Essential Fish Habitat (EFH). As part of the GP screening process, the Corps will coordinate with the NMFS in accordance with the 1996 amendments to the Magnuson-Stevens Fishery, Conservation and Management Act (MSFCMA) to protect and conserve the habitat of marine, estuarine and anadromous finfish, mollusks, and crustaceans. This habitat is termed EFH and is broadly defined to include "those waters and substrate necessary to fish for spawning, breeding, feeding, or growth to maturity." Any work in the following streams in the Connecticut River watershed that are stocked with Atlantic salmon shall not be authorized under Category 1 of this GP and must be screened for potential impacts to EFH. For additional EFH information and/or locations, see 50 CFR 600 (www.nmfs.noaa.gov), www.nero.nmfs.gov/RO/DOC/appguide1.html or contact NMFS (see Page 16).

- Black River (from its mouth in Springfield to its headwaters)
- Connecticut River
- Deerfield River
- Nulhegan River
- Ompompanoosuc River
- Ottauquechee River
- Passumpsic River
- Paul Stream
- Saxtons River
- Stevens River
- Wells River
- West River
- White River
- Williams River

11. Wild and Scenic Rivers. Any activity that occurs in the designated main stem of, within 0.25 mile up or downstream of the designated main stem of, or in tributaries within .25 miles of the designated main stem of a National Wild and Scenic River, or in "bordering and contiguous wetlands" (see Appendix A, Endnote 1) that are adjacent to the designated main stem of a National Wild and Scenic River, or that has the potential to alter flows within a river within the National Wild and Scenic River System, is not eligible for Category 1 regardless of size of the impacts. This condition applies to both designated Wild and Scenic Rivers and rivers officially designated by Congress as study rivers for possible inclusion while such rivers are in an official study status. Currently there are no designated National Wild and Scenic Rivers in Vermont. The Missisquoi River, from its' headwaters in Lowell to the Canadian border in Troy (25 miles) and from the Canadian border in East Richford to Enosburg Falls (25 miles) and the Trout River have been officially designated by Congress as study rivers.

12. Federal Navigation Project. Any structure or work that extends closer to the horizontal limits of any Corps navigation project than a distance of three times the project's authorized depth shall be subject to removal at the owner's expense prior to any future Corps dredging or the performance of periodic hydrographic surveys.

13. Navigation. (a) There shall be no unreasonable interference with navigation by the existence or use of the activity authorized herein, and no attempt shall be made by the permittee to prevent the full and free use by the public of all navigable waters at or adjacent to the activity authorized herein. (b) The permittee understands and agrees that if future operations by the U.S. require the removal, relocation or other alteration of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps, to remove, relocate or alter the structural work or obstructions caused thereby, without expense to the U.S. No claim shall be made against the U.S. on account of any such removal or alteration.

14. Federal Liability. In issuing this GP, the Federal Government does not assume any liability for the following: (a) damages to the permitted project or uses thereof as a result of other permitted or unpermitted activities or from natural causes; (b) damages to the permitted project or uses thereof as a result of current or future activities undertaken by or on behalf of the U.S. in the public interest; (c) damages to persons, property or to other permitted or unpermitted activities or structures caused by the activity authorized by the GP; (d) design or construction deficiencies associated with the permitted work; (e) damage claims associated with any future

- The introduction of non-native invasive and noxious species in disturbed areas is prohibited and any spread of such invasive plant species shall be controlled. See Additional References on Pages 18-19. The Corps lists these species in the above mentioned checklist in the Invasive and Noxious Species section.
- In areas of authorized temporary disturbance, if trees are cut they shall be cut at ground level and not uprooted in order to prevent disruption to the wetland soil structure and to allow stump sprouts to revegetate the work area, unless otherwise authorized.
- Wetland areas where permanent disturbance is not authorized shall be restored to their original condition and elevation, which under no circumstances shall be higher than the pre-construction elevation. Original condition means careful protection and/or removal of existing soil and vegetation, and replacement back to the original location such that the original soil layering and vegetation schemes are approximately the same, unless otherwise authorized.

19. Bank Stabilization. Projects involving construction or reconstruction/maintenance of bank stabilization structures within Corps jurisdiction should be designed to minimize environmental effects, effects to neighboring properties, etc. to the maximum extent practicable. Applicants must use the least intrusive method to stabilize the bank, following this sequential minimization process: avoidance, diversion of overland flow, vegetative stabilization, stone-sloped surfaces, and walls. Vertical walls/bulkheads must only be used in situations where reflected wave energy can be tolerated. This generally eliminates bodies of water where the reflected wave energy may interfere with or impact on harbors, marinas, or other developed shore areas. Refer to Additional References on Pages 18-19.

20. Sedimentation and Erosion Control. Adequate sedimentation and erosion control management measures, practices and devices, such as phased construction, vegetated filter strips, geotextile silt fences or other devices, shall be installed and properly maintained to reduce erosion and retain sediment on-site during and after construction. Such measures shall be capable of preventing erosion, of collecting sediment, suspended and floating materials, and of filtering fine sediment. The temporary devices shall be removed upon completion of work and the disturbed areas shall be stabilized. The sediment collected by these devices shall be removed and placed at an upland location, in a manner that will prevent its later erosion into a waterway or wetland. All exposed soil and other fills shall be permanently stabilized at the earliest practicable date.

21. Waterway/Wetland Work and Crossings

(a) All temporary and permanent crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed to withstand and to prevent the restriction of high flows, to maintain existing low flows, and to not obstruct the movement of aquatic life indigenous to the waterbody beyond the actual duration of construction.

(b) No activity may substantially disrupt the necessary life-cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water.

(c) To meet the objective of aquatic organism passage in (a) and (b) above, all temporary and permanent crossings of rivers, streams, brooks, etc. (hereon referred to as "streams") shall meet the following performance standards in order to qualify for Category 1 (refer to Additional References on Pages 18-19):

i. Design the structure to maintain a streambed composition and form throughout the culvert similar to and continuous with the adjacent reaches. To do this:

- o Design and install streambed material and bedforms if not adequately supplied and developed naturally,
- o Design profile and alignment through structure similar to those of adjacent stream reaches,
- o Design culvert elevation to remain embedded for the life of the structure and in consideration of future channel conditions.

ii. Maintain velocities, turbulence and depths within the structure similar to those found in adjacent stream reaches across a range of desired flows.

(d) The requirements to comply with the performance standards in (c) above in order to proceed as a Category 1 project do not apply to the following:

(c) Any project located within a FEMA designated Special Flood Hazard Area shall comply with minimum NFIP regulations, or local Flood Hazard Area regulations if more restrictive.
Note: Refer to Additional References, Pages 18-19.

24. Spawning and Breeding Areas. Discharges of dredged or fill material, and/or suspended sediment producing activities in fish and shellfish spawning or nursery areas, or amphibian and migratory bird breeding areas, during spawning or breeding seasons shall be avoided. Impacts on these areas shall be minimized to the maximum extent practicable during all times of year.

25. Storage of Seasonal Structures. Seasonal or recreational structures such as pier sections, floats, etc., that are removed from the waterway for a portion of the year shall be stored in an upland location, located above ordinary high water and not in a wetland.

26. Environmental Functions and Values. (a) The permittee shall make every reasonable effort to carry out the construction or operation of the work authorized herein in a manner that minimizes adverse impacts on fish, wildlife and natural environmental values. (b) The introduction of invasive plant species identified by any Federal agency in disturbed areas is prohibited and any spread of such invasive plant species shall be controlled. Refer to GC 18 and Additional References on Pages 18-19.

27. Protection of Special Aquatic Sites and Special Wetlands, including Vernal Pools.
Special Aquatic Sites (SAS): Projects with any temporary or permanent fill in SAS (Endnote 7), or that could adversely affect SAS, whether directly or indirectly, do not qualify for Category 1. This does not apply to "inland wetlands," but does apply to the other SAS types listed at Endnote 7.
Special Wetlands: When jurisdiction is triggered (see Activities Covered, Page 1), projects in or that could adversely affect Special Wetlands (Endnote 8), whether directly or indirectly, do not qualify for Category 1. Special wetlands are vernal pools, bogs, fens, and wetlands which provide habitat for threatened or endangered species as designated by the State of Vermont Natural Heritage Program. See Additional References on Pages 18-19 for additional references.
Vernal Pools (VP): These are a type of special wetland (Endnote 8). Category 1 excludes projects in or within 200' of a VP on the property when jurisdiction is triggered. This does not apply to temporary impacts associated with construction mats in previously disturbed areas of existing utility project right-of-ways (e.g., transmission lines, gas pipelines) or linear transportation projects (e.g., roads, highways, railways, trails, airport runways and taxiways) provided there is a Vegetation Management Plan or equivalent BMPs that avoid, minimize and mitigate impacts to aquatic resources. The applicant must minimize surrounding upland impacts to the greatest extent practicable, with the effort to minimize impacts being commensurate with the value of the pool. Impact minimization should be in accordance with *Best Development Practices: Conserving pool-breeding amphibians in residential and commercial development in the northeastern U.S.*, Calhoun and Klemens, 2002; and *Science and Conservation of Vernal Pools in Northeastern North America*, Calhoun and deMaynadier, 2008, specifically Chapter 12, Conservation Recommendations section, Page 241. (See Additional References, Pages 18-19). For example, site clearing, grading and construction activities should be limited to <25% of the VP terrestrial habitat, and roads and driveways should be excluded from the VP envelope. For Category 2 projects, the applicant shall delineate all VPs on the property (see GC 2). The Corps may waive this requirement on a case-by-case basis.

28. Fluvial Geomorphic Processes. (a) Wherever practicable, projects should be designed to accommodate the natural tendencies of the fluvial system. This should greatly enhance the likelihood of long-term success of the project and minimize the chance of exacerbating an otherwise undesirable physical adjustment process. Recognition of these processes requires assessment of physical parameters and characteristics of the watershed, the water and sediment regimes, the channel and floodplain, the anthropogenic influences and constraints on the reach concerned and to what extent sediment transport continuity in the reach can be attained. (b) Applicants should consult with the VT River Management Program Stream Alteration Engineer for assistance in compliance with this condition.

and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below."

38. Enforcement cases. This GP does not apply to any existing or proposed activity in Corps jurisdiction associated with a Corps or EPA enforcement action, until such time as the enforcement action is resolved or the Corps or EPA as appropriate determines that the activity may proceed independently without compromising the enforcement action.

Duration of Authorization/Grandfathering:

39. Duration of Authorization. Activities authorized under this GP that have commenced (i.e., are under construction) or are under contract to begin construction in reliance upon this authorization, will remain authorized provided the activity is completed within twelve months of the expiration date on this permit, unless:

a) the GP is either modified or revoked; or
b) discretionary authority has been exercised in accordance with 33 CFR 325.2(e)(2).

Activities authorized and completed under Category 1 or 2 of this GP will continue to remain authorized after this GP's expiration date.

40. Previously Authorized Activities.
(a) Projects that received written authorization from the Corps and that were completed under the previous GP's, nationwide permits, regional general permits or letters of permission, shall remain authorized as specified in each authorization letter.
(b) Activities authorized pursuant to 33 CFR 330.3 ("Activities occurring before certain dates") are not affected by this GP.

12-6-2012
Frank J. DelGiudice DATE
Chief, Permits and Enforcement Branch

Vermont Department of Fish and Wildlife
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Rich.kirn@state.vt.us

State endangered species
Vermont Department of Fish and Wildlife
Nongame and Natural Heritage Program
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
www.vtfishandwildlife.com/wildlife_nongame.cfm.

then significant natural communities:

http://maps.vermont.gov/imf/sites/ANR_NATRESViewer/jsp/launch.jsp. Some wetlands are more valuable and sensitive to fragmentation, non-point source runoff, and other secondary impacts. Upland buffers are especially essential to protect their functions.
The following documents provide conservation recommendations for vernal pools:
Best Development Practices: Conserving pool-breeding amphibians in residential and commercial development in the northeastern U.S., Calhoun and Klemens, 2002. Chapter III, Management Goals and Recommendations, Pages 15 – 26, is particularly relevant. (Available for purchase at www.maineaudubon.org/resource/index.shtml and on Corps website*.)
Science and Conservation of Vernal Pools in Northeastern North America, Calhoun and deMaynadier, 2008. Chapter 12, Conservation Recommendations section, Page 241, is particularly relevant. (Available for purchase via the internet. Chapter 12 is available on Corps website*.)

* www.nae.usace.army.mil/regulatory under "Vernal Pools."

Cape Cod Curbing: For smaller roads and driveways, the most important design feature to consider is curbing. Granite curbs and some traditional curbing can act as a barrier to amphibian and hatchling turtle movements. Large numbers of salamanders have been intercepted in their migrations by curbs and catch basins. Use of Cape Cod curbs rather than traditional curbing may be one solution. Alternatively, where storm water management systems require more traditional curbing, it may be possible to design in escape ramps on either side of each catch basin.

The Vernal Pool Directional Buffer Guidance document is located at www.nae.usace.army.mil/regulatory under: 1) "State General Permits" and then "Maine," and 2) "Vernal Pools."

GC 28: Fluvial Geomorphic Processes. Consult with the VT River Management Program Stream Alteration Engineer for assistance in compliance with GC 28. Refer to information provided at: www.anr.state.vt.us/dec/waterq/rivers/htm/rv_management.htm.

GC 30: Maintenance. River restoration projects that are designed to accommodate the natural dynamic tendencies of the fluvial system are maintained in accordance with the project's design objectives (Category 1) or the Corps authorization letter (Category 2). These projects are generally designed to support and implement channel assessment and management practices that recognize a stream's natural dynamic tendencies.

	transmission lines, gas pipelines) or linear transportation projects (e.g., roads, highways, railways, trails, airport runways and taxiways) provided there is a Vegetation Management Plan or equivalent BMPs that avoid, minimize and mitigate impacts to aquatic resources.) • Work on Corps properties & Corps-controlled easements[9]. • Structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River. • Fills below OHW of the Trout River.	delineation requirements on a case-by-case basis. Wetland fill and/or secondary impacts (e.g., site clearing, grading and construction activities) should be limited to <25% of the VP habitat. Where practicable, roads & driveways should be excluded from the VP envelope[8].	
(b) BANK STABILIZATION PROJECTS	Inland bank stabilization <100 linear FT and an average of <1 CY of fill per linear FT below ordinary high water (OHW). • *In-stream work limited to Jul 15-Oct 1.* • No work in VPs or within 200' of the VP's edge. • No work in SAS[7]. • No work in EFH waters (see GC 10). • No work in Rivers of Concern[11]. • No work on Corps properties and Corps-controlled easements[9]. • No work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River. • No work below OHW of the Trout River.	Inland bank stabilization ≥100 linear FT, and/or an average of ≥1 CY of fill per linear foot below OHW.	
(c) RIVER/ STREAM/ BROOK WORK & CROSSINGS *and* WATERWAY/ WETLAND CROSSINGS	• In-stream (e.g., rivers, streams, brooks, etc.) work limited to Jul 15 - Oct 1 (see GC 21). • All stream crossings conform with the performance standards in GC 21. • Bridge spans, open bottom arches or embedded culverts are required. • Culverts at waterbody crossings shall preserve hydraulic connectivity, at its present level, between any wetlands on either side of the road. <u>Work in this category excludes:</u> • Projects using retrofit methods increasing flow velocity or slip lining (only for 1 – 3 above). • Work in SAS[7]. • Open trench excavation in flowing waters except for riprap projects (See GC 21). • Structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River.	Projects sponsored by a Federal or State agency with proactive restoration[10] as a primary purpose with impacts of any area exceeding Category 1. Net impacts must not be greater than minimal.	

II. NAVIGABLE WATERS OF THE U.S.[3] – LAKE CHAMPLAIN, LAKE MEMPHREMAGOG, WALLACE POND and ADJACENT WETLANDS	**Navigable Waters of the U.S.[3]:** These waters were designated as navigable by Congress (33 CFR 329).		
	Projects not meeting Category 1 must apply/report to the Corps as either a Category 2 or Individual Permit project. All Category 1 and 2 projects must comply with all of this GP's applicable terms (Pages 1 – 6) and general conditions (Pages 7 – 16).		
	CATEGORY 1	**CATEGORY 2**	**INDIVIDUAL PERMIT (IP)**
(a) FILL	No provisions for new or previously unauthorized fills in Category 1.	<5,000 SF waterway/wetland fill and secondary impacts[4] (e.g. areas drained, flooded, fragmented, mechanically cleared or excavated). Includes boat ramps & bridge fills. Projects sponsored by a Federal or State agency with proactive restoration[10] as a primary purpose and impacts of any size. Net impacts must not be greater than minimal.	≥5,000 SF waterway/wetland fill and secondary impacts[4] (e.g. areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent waterway fills. EIS required by the Corps.
(b) REPAIR, REPLACEMENT IN KIND AND MAINTENANCE WORK	Repair, replacement in kind or maintenance of existing, currently serviceable, authorized structures and fills. Provided: • No expansion or change in use. • Must be rebuilt in same footprint, however minor deviations[12] in structure design allowed.	Repair/replacement in kind/maintenance of currently serviceable authorized fills with expansion or a change in use <5000 SF. Replacement of non-serviceable authorized fills, including expansion or a change in use, totaling <5000 SF. Construction mats of any area necessary to conduct activities that were previously authorized, authorized under Category 1, or not subject to regulation. Authorized construction mats must be in place for no more than 3 months, removed immediately upon work completion, and the wetlands must be restored (see GC 18).	Repair/maintenance/replacement in kind of currently serviceable authorized fills with expansion or a change in use >5000 SF.
(c) DREDGING	No provisions for dredging in Category 1.	New and maintenance dredging[13] up to 5,000 CY with upland disposal or beach nourishment. Provided: • No impacts to SAS[7] • Specific activities with impacts of any area or cubic yardage required to affect the containment, stabilization, or removal of hazardous or toxic waste materials that are performed, ordered, or sponsored by a government agency with established legal or regulatory authority may be reviewed as a Category 2 project. Wetlands	New or maintenance dredging[13] ≥5,000 CY. Dredging affecting an SAS[7]. All dredging with open water disposal.

	Activities required for the containment and cleanup of oil and hazardous substances that are subject to the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300) provided that the work is done in accordance with the Spill Control and Countermeasure Plan required by 40 CFR 112.3 and any existing state contingency plan and provided that the Regional Response Team (if one exists in the area) concurs with the proposed containment and cleanup action. SAS[7] must typically be restored in place at the same elevation. Scientific measurement devices & survey activities such as exploratory drilling, surveying and sampling, provided that such structures do not restrict movement of aquatic organisms. Does not include oil and gas exploration or seismic testing, or fills for roads or construction mats. Fish and wildlife harvesting devices and activities such as pound nets, duck blinds, and small fish attraction devices such as open-water fish concentrators (sea kites, etc.). Provided: no hazard to navigation and activity is not in wetlands (except Sea Lamprey control projects). Debris removal.	Sea Lamprey control projects. Nuisance aquatic plant control projects. Utility lines installed by directional bore.	2).

End Notes/Definitions

[1] **Waters of the United States (U.S.):**

a. All waters which are currently used, or were used in the past, or may be susceptible to use in interstate or foreign commerce, including all waters which are subject to the ebb and flow of the tide;

b. All interstate waters including interstate wetlands;

c. All other waters such as intrastate lakes, rivers, streams (including intermittent streams), mudflats, sandflats, wetlands, sloughs, prairie potholes, wet meadows, playa lakes, or natural ponds, the use, degradation or destruction of which could affect interstate or foreign commerce including any such waters:

i. Which are or could be used by interstate or foreign travelers for recreational or other purposes; or

ii. From which fish or shellfish are or could be taken and sold in interstate or foreign commerce; or

iii. Which are used or could be used for industrial purpose by industries in interstate commerce;

d. All impoundments of waters otherwise defined as waters of the U.S. under the definition;

e. Tributaries of waters identified in paragraphs (a)-(d) above;

f. The territorial seas;

g. Wetlands adjacent to waters (other than waters that are themselves wetlands) identified in (a)-(f) above. Waste treatment systems, including treatment ponds or lagoons designed to meet the requirements of CWA (other than cooling ponds as defined in 40 CFR 123.11(m) which also meet this definition's criteria) are not waters of the U.S.

h. Waters of the U.S. do not include prior converted cropland. Notwithstanding the determination of an area's status as prior converted cropland by any other federal agency, for the purposes of the CWA, the final authority regarding CWA jurisdiction remains with the EPA.

Vernal Pools and Habitat: A vernal pool, also referred to as a seasonal forest pool, is a temporary to semi-permanent body of water occurring in a shallow depression that typically fills during the spring or fall and may dry during the summer. Vernal pools have no permanent inlet or outlet and no viable populations of predatory fish. A vernal pool may provide the primary breeding habitat for wood frogs (*Rana sylvatica*), spotted salamanders (*Ambystoma maculatum*), blue-spotted salamanders (*Ambystoma laterale*), Jefferson salamander (*Ambystoma jeffersonianum*), and fairy shrimp (*Eubranchipus* sp.), as well as valuable habitat for other plants and wildlife, including several rare, threatened, and endangered species. A vernal pool intentionally created for the purposes of compensatory mitigation is included in this definition. For the purposes of this GP, the presence of any of the following species in any life stage in any abundance level/quantity would designate the waterbody as a vernal pool: fairy shrimp, blue spotted salamanders, spotted salamanders or wood frogs. The Corps may determine during a Category 2 review that a waterbody should not be regulated as a VP based on available evidence. For the purposes of this GP, the VP Management Areas are the: Vernal Pool Depression (includes the vernal pool depression up to the spring or fall high water mark, and includes any vegetation growing within the depression), Vernal Pool Envelope (area within 100 FT of the VP Depression's edge) and Critical Terrestrial Habitat (area within 100-750 FT of the Vernal Pool Depression's edge). [*Note: Critical Terrestrial Habitat is defined as 100 - 750 FT on page 243 of the document "Science and Conservation of Vernal Pools in Northeastern North America," Calhoun and deMaynadier, 2008, which is referenced in Appendix E, page 3, Paragraph 10(b).

[9] **Corps Properties & Easements:** Contact the Corps, Real Estate Division (978) 318-8580 to initiate reviews about both Corps holdings and permit requirements.

[10] **Proactive Restoration:** The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former wetland or other aquatic resource (called re-establishment) or a degraded wetland or other aquatic resource (called rehabilitation). Restoration means the result of actions which, in the opinion of the Federal and state resource agencies, reinstates, or will reinstate, insofar as possible, the functions and values of a wetland or aquatic resource which has been altered. Restoration is the re-creation or rehabilitation of wetland or other aquatic resource ecosystems whose natural functions have been destroyed or impaired. The Corps will decide if a project qualifies as proactive restoration and must determine along with Federal & state agencies that the net effects would be no more than minimal.

[11] **Rivers of Concern:** The following are rivers of concern due to either endangered species or cumulative impacts. There are no non-reporting bank stabilization activities in these rivers: Batten Kill River (to the headwaters), Black River (from its mouth in Springfield to its headwaters), Connecticut River, Lamoille River (from Hardwick to the confluence with Lake Champlain), Lewis Creek (from the Rte 116 crossing to the confluence with Lake Champlain), Missisquoi River (from the International Boundary in Richford, VT to the confluence with Lake Champlain), Ompompanoosuc River (to the headwaters), Otter Creek (from Rutland to the confluence with Lake Champlain), North Branch of Ball Mountain Brook (from Pikes Falls to the headwaters), Poultney River (to the headwaters), West River (from Jamaica to the confluence with the Connecticut River), White River (to the headwaters), Winooski River (from Montpelier to Lake Champlain).

[12] **Minor deviations.** Changes to the structure's configuration or filled area, including those due to changes in materials, construction techniques, or current construction codes or safety standards, which are necessary to make repair, rehabilitation, or replacement are permitted, provided the adverse environmental effects resulting from such repair, rehabilitation, or replacement are minimal. Currently serviceable means useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

[13] **Maintenance Dredging.** Includes areas and depths previously authorized by the Corps and dredged. **New Dredging:** Includes dredging proposed in previously un-dredged areas and/or in areas exceeding previously authorized dimensions (deeper or wider than previously authorized) excluding normal overdredge.

[14] **Boating Facilities:** Facilities that provide, rent or sell mooring space, e.g., marinas, yacht clubs, boat yards, dockominiums.

[15] **Federal Navigation Projects (FNPs):** FNPs are comprised of Federal channels and Federal anchorages. Contact the Corps for their location and information. **Horizontal Limits:** The outer edge of an FNP. **Buffer zone:** Equal to three times the authorized depth of that channel.

[16] Construction Mats: Construction, swamp and timber mats (herein referred to as "construction mats") are generic terms used to describe structures that distribute equipment weight to prevent wetland damage while facilitating passage and providing work platforms for workers and equipment. They are comprised of sheets or mats made from a variety of materials in various sizes. A timber mat consists of large timbers bolted or cabled together. Corduroy roads, which are not considered to be construction mats, are cut trees and/or saplings with the crowns and branches removed, and the trunks lined up next to one another. Corduroy roads are typically installed as permanent structures. Like construction mats, they are considered as fill whether they are installed temporarily or permanently.

[17] **Headwater and Ephemeral Streams:** Forested upland and wetland clearing can lead to additional direct and indirect impacts to the headwater streams and ephemeral streams on individual sites. Headwater streams and wetlands provide a rich resource base that contributes to the productivity of both local food webs and those farther downstream. Land use changes in the vicinity of small streams and wetlands can impair the natural functions of headwater systems. These systems are vitally important to maintaining the quality and quantity of water and aquatic health of streams lower in the watershed.

Removal
• Matting should be removed by "backing" out of the site, removing mats one at a time. Any rutting or significant indentations identified during mat removal should be regraded immediately, taking care not to compact soils. • Mats should be cleaned before transport to another wetland location to remove soil & any invasive plant species, seed stock or plant material. • Cleaning methods may include but are not limited to shaking or dropping mats in a controlled manner with a piece of machinery to knock off attached soil & debris, spraying with water or air, & sweeping. • Crossings should be inspected following mat removal to determine the level of restoration required.
Restoration
• Special precautions should be taken to promptly stabilize areas of disturbed soil located near wetlands & streams. Matted areas within wetlands will be allowed to naturally revegetate from existing root & seed stock of native plant species . If conditions warrant, wetland seed mix may be broadcasted over the matted area to supplement the existing seed & rootstock. The use of mulch in wetlands shall consist of weed-free mulch to mitigate the risk of the spread of invasive plant species.

US Army Corps
of Engineers®
New England District

WORK START NOTIFICATION FORM

****
* MAIL TO: U.S. Army Corps of Engineers, New England District *
* Vermont Project Office *
* 11 Lincoln Street, Room 210 *
* Essex Junction, Vermont 05452 *
****

Corps of Engineers Permit No. NAE-2014-1203 was issued to the Vermont Agency of Transportation. The permit authorized the permittee to place fill in a total of about 3,816 sq. ft. (0.09 acre) of the Clarendon River and adjacent wetlands in conjunction with the replacement, on existing alignment, of Bridge No. 11 on TH 3 in Clarendon, Vermont.

The people (e.g., contractor) listed below will do the work, and they understand the permit's conditions and limitations.

PLEASE PRINT OR TYPE

Name of Person/Firm: _____

Business Address: _____

_____

_____

Telephone Numbers: (____) _____ (____) _____

Proposed Work Dates: **Start** _____ **Finish** _____

Permittee's Signature: _____ **Date:** _____

Printed Name: _____ **Title:** _____

****

FOR USE BY THE CORPS OF ENGINEERS

PM: Angela C. Repella **Submittals Required:** No

Inspection Recommendation: _____

_____

US Army Corps of Engineers®
New England District

(Minimum Notice: Permittee must sign and return notification within one month of the completion of work.)

COMPLIANCE CERTIFICATION FORM

USACE Project Number: NAE-2014-1203

Name of Permittee: Vermont Agency of Transportation

Permit Issuance Date: July 23, 2014

Please sign this certification and return it to the following address upon completion of the activity and any mitigation required by the permit. You must submit this after the mitigation is complete, but not the mitigation monitoring, which requires separate submittals.

```
*****************************************************************************************
* MAIL TO:  U.S. Army Corps of Engineers, New England District                          *
*           Vermont Project Office                                                      *
*           11 Lincoln Street, Room 210                                                 *
*           Essex Junction, Vermont  05452                                              *
*****************************************************************************************
```

Please note that your permitted activity is subject to a compliance inspection by an U.S. Army Corps of Engineers representative. If you fail to comply with this permit you are subject to permit suspension, modification, or revocation.

I hereby certify that the work authorized by the above referenced permit was completed in accordance with the terms and conditions of the above referenced permit, and any required mitigation was completed in accordance with the permit conditions.

_____ Signature of Permittee

_____ Date

_____ Printed Name

_____ Date of Work Completion

_____ Telephone Number

CERTIFICATION FOR FEDERAL-AID CONTRACTS

The prospective bidder, by signing and submitting this bid proposal, certifies, to the best of his or her knowledge and belief, that:

(1) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person or influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

(2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered to. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such sub-recipients shall certify and disclose accordingly.

State of Vermont
Agency of Transportation
CONTRACTORS EEO CERTIFICATION FORM

Certification with regard to the Performance of Previous Contracts of Subcontractors subject to the Equal Employment Opportunity Clause and the filing of Required Reports.

The bidder, hereby certifies that he/she has participated in a previous contract or subcontract subject to the equal opportunity clause as required by Executive Orders 10925, 11114, or 11246 as amended, and that he/she has, filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the Presidents committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

JA McDonald, Inc.	Eric Boyden	President
Company	By	Title

NOTE: The above certification is required by the Equal Employment Opportunity regulations of the Secretary of Labor(41 CFR 60-1.7(b)(1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5 (Generally only contracts or subcontracts of $10,000 or under are exempt.) Currently, Standard Form 100(EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b)(1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration, or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

CA-111-B
(01/06/15 revision)

CONSTRUCTION CONTRACT

1. Parties. This is a construction contract made this 4th day of December, 2015 between the State of Vermont, by its Agency of Transportation (hereafter called "State" or "Agency"), and J.A. McDonald, Incorporated of 585 Gilman Road, PO Box 132, Lyndon Center, VT 05850, a corporation, incorporated under the laws of the State of Vermont, its successors and assigns, (hereafter called Contractor).

2. Subject Matter: The Contractor, in consideration of the payment or payments specified in this Contract and agreed to by State, hereby agrees to furnish all the materials and to perform all the work and labor in the improvement of a certain project in the Town of Clarendon, County of Rutland, State of Vermont, being approximately 175 Feet in length, at the unit prices bid by Contractor for the respective estimated quantities, aggregating approximately the sum of One Million Three Hundred Fifty Three Thousand Four Hundred Sixty Nine Dollars and Fifty Cents ($1,353,469.50), and such other items, as are mentioned in the original Proposal. The original Proposal and prices named, together with the Standard Specifications for Construction ("Specifications") as are listed in the Schedule of Prices, are made a part of this Contract. Also, the drawings of the roadway prepared by the Agency, as verified by the Agency are made a part this Contract. The project is situated as follows:
Clarendon BRO 1443 (48): 1.05 MILES SOUTH OF THE INTERSECTION OF TH 3 AND VT RT 133.
The construction consists of: REPLACEMENT OF BRIDGE 11 WITH A NEW PRECAST CONCRETE STRUCTURE WITH RELATED APPROACH AND CHANNEL WORK.

3. Labor and Material; Specifications. The Contractor shall perform all the work and labor in the best and most workmanlike manner. The materials and labor shall be in strict and entire conformity, in every respect, with the Specifications and drawings and shall be subject to the inspection and approval of the Agency. If any of the material or labor shall be rejected by the Agency as defective or unsuitable, then the Contractor shall remove and replace the defective or unsuitable materials with other approved materials and do the labor anew, to the satisfaction and approval of the Agency, at the cost and expense of the Contractor. The Standard Specifications for Construction, approved and adopted by the Agency in 2011 are incorporated herein, and made a part of this Contract.

4. Time for Performance; Liquidated Damages. The Contractor shall furnish the materials and perform the labor in every respect to the satisfaction and approval of the Agency, on or before September 2, 2016 after written notice has been given by the Engineer to begin work. In case of the failure on the part of the Contractor, for any reason, except as provided in this Contract, to complete the furnishing of the materials and performing the work on or before September 2, 2016 the State shall deduct from any moneys due or which may become due the Contractor, or if no moneys shall be due, the State shall have the right to recover the amount of liquidated damages as provided in the Specifications for each and every day elapsing between the time stipulated for the completion and the actual date of completion, in accordance with the terms of the Contract. Any such deductions or sums to be recovered are not penalties but liquidated damages. However, the Agency at its discretion, shall make allowance over the period specified for the completion of the work, for causes over which the Contractor has no control and which must delay the completion of the work, in such case, the Contractor shall become liable for liquidated damages for delays beginning from the date on which the extended period shall expire.

5. Extra Work or Materials; Claims. The Contractor understands and agrees that the Agency will not allow any claim for extra work or materials, not specifically provided in this Contract. The Contractor shall not do any work or furnish any materials not covered by these Specifications and Contract, unless such work is ordered in writing by the Agency. In no event shall the Contractor incur any liability by reason of any verbal directions or instructions that he may be given by the Agency. The State will not be liable for any materials furnished or used or for any work or labor done, unless the materials, work or labor are required of the Contractor on written order furnished by the Agency. Any such work or material which may be done or furnished by the Contractor without such written order first being given by the Agency shall be at the Contractor's own risk, cost and expense. The Contractor agrees that without such written order the Contractor shall make no claim for compensation for work or materials so done or furnished.

6. Assignment; Subcontracting. The Contractor shall not assign this Contract or any part of this Contract, or any right to any moneys to be paid the Contractor under this Contract, without the prior written approval of the Agency. The Contractor shall not subcontract any part of the work to be done or materials furnished under the Contract without the written approval of the Agency.

7. Acceptance of Final Payment; Release. The Contractor's acceptance of the final payment shall be considered as a release in full of all claims against the State of Vermont arising out of, or by reason of the work done and materials furnished under this Contract.

8. Bonds. The Bonds given by the Contractor, a Compliance Bond in a sum equal to one-hundred (100) per centum, and a Labor and Materials Bond in the sum equal to one-hundred (100) per centum of the total contract price of the work to be done, to secure a proper compliance with the terms and provisions of this Contract, are attached to and made a part of this Contract.

9. Dispute Resolution; Exclusivity of Administrative Remedies. All questions or disputes arising between the parties hereto respecting any matter pertaining to this Contract or any part of this Contract, or any breach of this Contract shall be referred to the Secretary of Transportation, whose decision and award shall be final, binding and conclusive upon all parties, subject to the right of appeal to the Transportation Board under 19 V.S.A. § 5(d) (4). All other rights or rights of action at law or in equity under and by virtue of this Contract and all matters connected with and relating to this Contract are hereby expressly waived.

10. Compensation for Contract Work. The Contractor agrees to receive the prices set forth in the following Schedule of Prices as full compensation for furnishing all the materials and labor which may be required in the prosecution and completion of the whole of the work to be done under this Contract and in all respects to complete this Contract to the satisfaction of the Agency.

VERMONT AGENCY OF TRANSPORTATION

CONTRACT SCHEDULE

DATE : 11/06/15
REVISED: 11/03/15

CONTRACT ID: 12J160

PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0005	201.10 CLEARING AND GRUBBING, INCLUDING INDIVIDUAL TREES AND STUMPS	1.000 LS	15,000.00	000	15,000.00	
0010	203.15 COMMON EXCAVATION	600.000 CY	10.00	000	6,000.00	
0015	203.27 UNCLASSIFIED CHANNEL EXCAVATION	1,225.000 CY	15.00	000	18,375.00	
0020	203.31 SAND BORROW	90.000 CY	34.00	000	3,060.00	
0025	203.32 GRANULAR BORROW	25.000 CY	41.00	000	1,025.00	
0030	204.20 TRENCH EXCAVATION OF EARTH	40.000 CY	10.00	000	400.00	
0035	204.22 TRENCH EXCAVATION OF EARTH, EXPLORATORY (N.A.B.I.)	1.000 CY	75.00	000	75.00	
0040	204.25 STRUCTURE EXCAVATION	175.000 CY	14.50	000	2,537.50	
0045	204.30 GRANULAR BACKFILL FOR STRUCTURES	75.000 CY	52.00	000	3,900.00	
0050	210.10 COLD PLANING, BITUMINOUS PAVEMENT	250.000 SY	16.00	000	4,000.00	
0055	301.35 SUBBASE OF DENSE GRADED CRUSHED STONE	350.000 CY	46.00	000	16,100.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS		UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0060	401.10 AGGREGATE SURFACE COURSE	20.000	CY	66.00000		1,320.00	
0065	402.10 AGGREGATE SHOULDERS, IN PLACE	20.000	CY	65.00000		1,300.00	
0070	404.65 EMULSIFIED ASPHALT	11.000	CWT	42.00000		462.00	
0075	406.50 PRICE ADJUSTMENT, ASPHALT CEMENT (N.A.B.I.)	1.000	LU	1.00000		1.00	
0080	504.10 FURNISHING EQUIPMENT FOR DRIVING PILING	1.000	LS	73,000.00000		73,000.00	
0085	505.155 STEEL PILING, HP 12 X 63	240.000	LF	33.00000		7,920.00	
0090	505.45 DYNAMIC PILE LOADING TEST	2.000	EACH	4,000.00000		8,000.00	
0095	514.10 WATER REPELLENT, SILANE	15.000	GAL	52.00000		780.00	
0100	516.10 BRIDGE EXPANSION JOINT, ASPHALTIC PLUG	45.000	LF	140.00000		6,300.00	
0105	520.10 MEMBRANE WATERPROOFING, SPRAY APPLIED	200.000	SY	100.00000		20,000.00	
0110	524.11 JOINT SEALER, HOT POURED	45.000	LF	22.00000		990.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0115	524.21 JOINT SEALER, POLYURETHANE	15.000 LF	5.00000		75.00	
0120	525.45 BRIDGE RAILING, GALVANIZED STEEL TUBING/CONCRETE COMBINATION	155.000 LF	410.00000		63,550.00	
0125	529.15 REMOVAL OF STRUCTURE (850 SF-EST.)	1.000 EACH	57,000.00000		57,000.00	
0130	531.17 BEARING DEVICE ASSEMBLY, STEEL REINFORCED ELASTOMERIC PAD	12.000 EACH	350.00000		4,200.00	
0135	609.10 DUST CONTROL WITH WATER	1.000 MGAL	400.00000		400.00	
0140	613.10 STONE FILL, TYPE I	10.000 CY	47.00000		470.00	
0145	613.12 STONE FILL, TYPE III	525.000 CY	49.00000		25,725.00	
0150	617.10 RELOCATE MAILBOX, SINGLE SUPPORT	4.000 EACH	210.00000		840.00	
0155	619.16 STEEL MARKER POSTS	2.000 EACH	46.00000		92.00	
0160	619.20 REMOVING AND RESETTING PROPERTY MARKERS	2.000 EACH	300.00000		600.00	
0165	621.30 BOX BEAM GUARDRAIL	55.000 LF	74.00000		4,070.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS		UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0170	621.80 REMOVAL AND DISPOSAL OF GUARDRAIL	100.000	LF	2.00000		200.00	
0175	621.85 GUIDE POSTS (WOOD)	2.000	EACH	100.00000		200.00	
0180	625.10 SLEEVES FOR UTILITIES (1 X 4")	40.000	LF	26.00000		1,040.00	
0185	630.10 UNIFORMED TRAFFIC OFFICERS	40.000	HR	60.00000		2,400.00	
0190	630.15 FLAGGERS	200.000	HR	28.00000		5,600.00	
0195	631.10 FIELD OFFICE, ENGINEERS	1.000	LS	6,800.00000		6,800.00	
0200	631.16 TESTING EQUIPMENT, CONCRETE	1.000	LS	500.00000		500.00	
0205	631.17 TESTING EQUIPMENT, BITUMINOUS	1.000	LS	750.00000		750.00	
0210	631.26 FIELD OFFICE TELEPHONE (N.A.B.I.)	3,000.000	DL	1.00000		3,000.00	
0215	635.11 MOBILIZATION/DEMOBILIZATION	1.000	LS	125,000.00000		125,000.00	
0220	646.20 4 INCH WHITE LINE	650.000	LF	1.00000		650.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS		UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0225	646.21 4 INCH YELLOW LINE	650.000	LF	1.00000		650.00	
0230	649.31 GEOTEXTILE UNDER STONE FILL	650.000	SY	3.50000		2,275.00	
0235	649.51 GEOTEXTILE FOR SILT FENCE	240.000	SY	12.00000		2,880.00	
0240	651.15 SEED	5.000	LB	10.00000		50.00	
0245	651.17 SEED, WINTER RYE	5.000	LB	5.00000		25.00	
0250	651.18 FERTILIZER	25.000	LB	2.00000		50.00	
0255	651.20 AGRICULTURAL LIMESTONE	1.000	TON	600.00000		600.00	
0260	651.25 HAY MULCH	1.000	TON	700.00000		700.00	
0265	651.35 TOPSOIL	40.000	CY	50.00000		2,000.00	
0270	651.40 GRUBBING MATERIAL	290.000	SY	12.00000		3,480.00	
0275	652.10 EPSC PLAN	1.000	LS	1,500.00000		1,500.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0335	900.608 SPECIAL PROVISION (STONE FILL, STREAM BED MATERIAL) (TYPE I	100.000 CY	63.00000		6,300.00	
0340	900.615 SPECIAL PROVISION (INCENTIVE, DISINCENTIVE) (N.A.B.I.)	56,000.000 DL	1.00000		56,000.00	
0345	900.620 SPECIAL PROVISION (CPM SCHEDULE)	1.000 EACH	1,200.00000		1,200.00	
0350	900.620 SPECIAL PROVISION (GUARDRAIL APPROACH SECTION TO CONCRETE BRIDGE RAILING)	4.000 EACH	6,200.00000		24,800.00	
0355	900.620 SPECIAL PROVISION (GUARDRAIL END ASSEMBLY, TYPE IIA)	1.000 EACH	4,000.00000		4,000.00	
0360	900.640 SPECIAL PROVISION (PRE-EXCAVATION OF INTEGRAL ABUTMENT PILES, EARTH)	75.000 LF	435.00000		32,625.00	
0365	900.640 SPECIAL PROVISION (PRE-EXCAVATION OF INTEGRAL ABUTMENT PILES, ROCK)	25.000 LF	1,600.00000		40,000.00	
0370	900.645 SPECIAL PROVISION (REMOVE AND RELOCATE EXISTING STONE WALL	1.000 LS	7,400.00000		7,400.00	
0375	900.645 SPECIAL PROVISION (TEMPORARY RELOCATION OF STREAM)	1.000 LS	21,000.00000		21,000.00	
0380	900.645 SPECIAL PROVISION (TRAFFIC CONTROL, ALL-INCLUSIVE)	1.000 LS	6,500.00000		6,500.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0385	900.650 SPECIAL PROVISION (MAT DENSITY PAY ADJUSTMENT, SMALL QUANTITY)(N.A.B.I.)	1.000 LU	1.00000		1.00	
0390	900.650 SPECIAL PROVISION (MIXTURE PAY ADJUSTMENT)(N.A.B.I.)	1.000 LU	1.00000		1.00	
0395	900.680 SPECIAL PROVISION (BITUMINOUS CONCRETE PAVEMENT, SMALL QUANTITY)	185.000 TON	163.00000		30,155.00	
0400	540.10 PRECAST CONCRETE STRUCTURE (ABUTMENT #1)	1.000 LS	85,000.00000		85,000.00	
0410	540.10 PRECAST CONCRETE STRUCTURE (ABUTMENT #2)	1.000 LS	87,000.00000		87,000.00	
0420	540.10 PRECAST CONCRETE STRUCTURE (APPROACH SLAB #1)	1.000 LS	34,000.00000		34,000.00	
0430	540.10 PRECAST CONCRETE STRUCTURE (APPROACH SLAB #2)	1.000 LS	34,000.00000		34,000.00	
0460	601.0915 18" CPEP	76.000 LF	55.00000		4,180.00	
ALT GROUP ZA1						
0470	507.12 REINFORCING STEEL, LEVEL II (FPQ)	1,800.000 LB	7.00000		12,600.00	
0475	900.608 SPECIAL PROVISION (HIGH PERFORMANCE CONCRETE, RAPID SET)(FPQ)	31.000 CY	2,100.00000		65,100.00	

CONTRACT ID: 12J160 PROJECT(S):CLARENDON BRO 1443(48)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0480	900.640 SPECIAL PROVISION (PRESTRESSED NEXT D BEAMS)(NEXT 36D)(FPQ	226.000 LF	1,250.00000		282,500.00	
	TOTAL BID				1,353,469.50	

Project Name & Number: Clarendon BRO 1443 (48)
EMPLOYER IDENTIFICATION NUMBER 03-0273850

WE THE UNDERSIGNED PARTIES AGREE TO BE BOUND BY THIS CONTRACT

By the State of Vermont:

Date: 12/4/15

Signature

Name: Chris Cole\Richard Tetreault

Agency: Transportation

By the Contractor:

Date: November 24, 2015

Signature:

Name: Eric Boyden

Title: President