J.A. McDONALD, INC.

PO Box 132, Lyndon Center, VT 05850 (802) 626-5201

CORPORATE RESOLUTION DESIGNATING AGENT

J. A. McDONALD, INC.

J. A. McDonald, Inc., a Vermont Corporation ("The Corporation"), by this written consent of its sole director, adopts the following resolution:

Be It Resolved that Eric Boyden and Judythe D. Desrochers, or either of them, are hereby designated as the Corporation's Agents for the purposes of signing on behalf of the Corporation any and all contracts, subcontracts, change orders, supplementary agreements and bonds relating to the Contract between the Corporation and the Vermont Agency of Transportation for the construction project consisting of the replacement of the existing bridge on Town Highway 1 (East River Road), with a new widened bridge on an alignment similar to the existing bridge, including channel and approach work; known as – VAOT Project Lincoln BRF 0188(8).

Each of Eric Boyden and Judythe D. Desrochers is hereby authorized to execute on the Corporation's behalf any document or instrument necessary or desirable to implement and fulfill the terms of the Contract for construction of the Lincoln BRF 0188(8) Project.

Effective as of the 18th day of February, 2015.

J. A. McDONALD, INC.

BY: _____
Eric Boyden, President

State of Vermont
County of Caledonia

At Lyndon Center in the County of Caledonia this 18th day of February, 2015, personally appeared Eric Boyden, President, of J. A. McDonald, Inc., and acknowledged the foregoing instrument by him sealed and subscribed to be his own free act and deed.

Before me,

Judythe D. Desrochers

Notary Public
My Commission Expires: 2/10/2019

Bond # 0184164

Compliance Bond

CA-112

STATE OF VERMONT
CONTRACT BOND

KNOW ALL MEN BY THESE PRESENTS, That we J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

as Principal, and Berkley Insurance Company
475 Steamboat Road
Greenwich, CT 06830

as Surety, are held and firmly bound unto the State of Vermont, as Obligee, in the penal sum of Two Million Three Hundred Sixty Five Thousand Eight Hundred Fifty Four Dollars and Ten Cents ($2,365,854.10), good and lawful money of the United States of America, for the payment of which, well and truly to be made, we bind ourselves, our heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the above bounden Principal has entered into a certain written contract with the above named Obligee, the State of Vermont dated the 23rd day of February A.D. 2015 for the construction of a certain project in the State of Vermont known as **Lincoln BRF 0188 (8)** which contract is hereby referred to and made a part hereof as fully and to the same extent as if set forth at length herein:

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH that, if the above bounden Principal and his subcontractors and his or their agents and servants shall well and truly keep, do and perform, each and every, all and singular the matters and things in said contract set forth and specified to be by the said Principal kept, done and performed at the time and in the manner in said contract specified and shall pay over, make good and reimburse the State of Vermont all loss or losses and damage or damages which the above named Obligee, the State of Vermont, may sustain by reason of failure or default on the part of the Principal or his subcontractors, or his or their agents and servants, to fully carry out the terms of said contract, then this obligation shall be void; otherwise, to be and remain in full force and effect.

In Witness Whereof we hereunto set our hands and seals this 18 day of February A.D. 2015.

In Presence of **(TWO WITNESSES REQUIRED)**

[signature]

Pat Clifford

as to Principal

J. A. McDonald, Inc.
Name of Corporation, Co-partnership or Individual

[signature] L.S.
Authorized Signature

President
Title

(TWO WITNESSES REQUIRED)

Rosa Robbins

Howard Dunda

as to Surety.

Berkley Insurance Company
Bonding Company

S Francine Beede L.S.
Authorized Signature

Attorney-In-Fact
Title

Compliance Bond

CONTRACT BOND

J.A. McDonald, Incorporated

585 Gilman Road
PO Box 132
Lyndon Center, VT 05850
Principal

Berkley Insurance Company

475 Steamboat Road
Greenwich, CT 06830
Surety.

and

STATE OF VERMONT

Obligee.

Date 2/23 2015

Amount, $2,365,854.10

Approved 2-23 2015

Secretary of Transportation
or Duly Authorized Agent

Bond # 0184164

Labor and Materials Bond

CA-113

STATE OF VERMONT
CONTRACT BOND

KNOW ALL MEN BY THESE PRESENTS, That we J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

as Principal, and Berkley Insurance Company
475 Steamboat Road
Greenwich, CT 06830

As Surety, are held and firmly bounden, unto the Secretary of Transportation for the State of Vermont, and his successors in office, as Obligee, in the penal sum of Two Million Three Hundred Sixty Five Thousand Eight Hundred Fifty Four Dollars and Ten Cents ($2,365,854.10), good and lawful money of the United States of America, for the payment of which, well and truly to be made, we bind ourselves, our heirs, administrators, executors, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the above bounden Principal has entered into a certain written contract with the State of Vermont, dated the 23rd day of February A.D. 2015 for the construction of a certain project in the State of Vermont known **Lincoln BRF 0188 (8)** which contract is hereby referred to and made a part hereof as fully and to the same extent as if set forth at length herein:

NOW, THEREFORE, THE CONDITION OF THE ABOVE OBLIGATION IS SUCH that, if the above bounden, Principal shall pay, settle, liquidate and discharge the claims of all creditors for material, merchandise, labor, rent, hire of vehicles, power shovels, rollers, concrete mixers, tools and other appliances, professional services, premiums and other services used or employed in carrying out the terms of said contract between said Principal and the State of Vermont, and shall pay all taxes, both State and municipal, and contributions to the Vermont Commissioner of Employment and Training, accruing during the term of performance of said contract, this agreement to make such payment being in compliance with the requirements of 19 Vermont Statutes Annotated, Section 10(9), as amended, to furnish security there under, and being in fact such security, then this obligation shall be void; otherwise, to be and remain in full force and effect.

In Witness Whereof we hereunto set our hands and seals this 18 day of February A.D. 2015.

In Presence of **(TWO WITNESSES REQUIRED)**

as to Principal

J. A. McDonald, Inc.
Name of Corporation, Co-partnership or Individual

L.S.
Authorized Signature

President
Title

(TWO WITNESSES REQUIRED)

as to Surety.

Berkley Insurance Company
Bonding Company

L.S.
Authorized Signature

Attorney-In-Fact
Title

Labor & Materials Bond

CONTRACT BOND

J.A. McDonald, Incorporated

585 Gilman Road
PO Box 132
Lyndon Center, VT 05850
Principal

Berkley Insurance Company

475 Steamboat Road
Greenwich, CT 06830
Surety.

and

STATE OF VERMONT

Obligee.

Date 2/23 2015

Amount $2,365,854.10

Approved 2/23 2015

Secretary of Transportation
or Duly Authorized Agent

SCHEDULE OF INSURANCE RATES ON EXTRA WORK

APPLICABLE TO THE Lincoln BRF 0188 (8) PROJECT

To the Secretary of Transportation, Montpelier, Vermont

In connection with the contract for the above project, I/we submit herewith the following classification of work and the rates of insurance applicable to extra work performed and accepted on said project:

WORKER'S COMPENSATION (Per $100)

Classification No. 5507 Street & Road Rate $ 9.70

Classification No. 6217 Excavation Rate 10.02

Classification No. 5222 Concrete Bridge Rate 10.78

Classification No. 5606 Executive Superv. Rate 2.67

GENERAL LIABILITY (Per $1,000)

Classification No. 99315 Street & Road Rate 35.97

Classification No. 94007 Excavation Rate 44.58

Classification No. 91266 Concrete Bridge Rate 46.62

Classification No. 91580 Executive Superv. Rate 40.12

91589 Subs 1.88

AUTOMOBILE LIABILITY (Per Vehicle)

Classification No. Light Vehicle Rate $ 447

Classification No. Medium Vehicle Rate 466

Classification No. Heavy Truck Rate 528

Classification No. Extra Heavy Truck Rate 1,061

*Federal Social Security Act Rate 7.65%

*Federal Unemployment Insurance Rate 0.60% (Net)

*Vermont Unemployment Compensation Act Rate 8.4%

All items of insurance as above on extra work performed and accepted shall be allowed on the final estimate as per the Vermont Standard Specifications For Construction.

February 18, 2015
Date

J. A. McDonald, Inc.
Name of Corporation, Co-Partnership or Individual

Eric Boyden, President
Name and Title of Individual Signing the Contract

Lyndon Center, VT
Town or City, State

*MUST BE FILLED IN

VERMONT

State of Vermont
Agency of Transportation
Contract Administration
One National Life Drive
Montpelier, VT 05633-5001
www.aot.state.vt.us/conadmin

[phone] 802-828-2641
[fax] 802-828-5545
[ttd] 800-253-0191

CA-95

TO: CONTRACT ADMINISTRATION
MONTPELIER, VERMONT

RE: Lincoln BRF 0188 (8)

I hereby certify that I have access to the STANDARD SPECIFICATIONS FOR CONSTRUCTION, dated 2011, by clicking: http://vtranscontracts.vermont.gov/construction-contracting/2011-standard-specifications

Respectfully,

J.A. McDonald, Inc.
Name of Corporation, Co-Partnership or Individual

Eric Boyden
Name of Individual Signing the Contract

Signature of Individual Signing the Contract

President
Title of Individual Signing the Contract

To be filled in completely by Contractor

(Street) P.O. Box 132

(Town or City) Lyndon Center

(State) Vermont

(Date) February 13, 2015

To be filled in completely by Contractor

JAMCD-1 OP ID: BD

ACORD

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) 02/18/2015

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER
Paige & Campbell, Inc.
P.O. Box 469
Barre, VT 05641
Jonathon P. Shea, CPCU

Phone: 802-476-6631
Fax: 802-476-5917

CONTACT NAME:
PHONE (A/C, No, Ext):
FAX (A/C, No):
E-MAIL ADDRESS:

INSURER(S) AFFORDING COVERAGE	NAIC #
INSURER A : Travelers Insurance Co.	25682
INSURER B :	
INSURER C :	
INSURER D :	
INSURER E :	
INSURER F :	

INSURED
J A McDonald Inc.
P.O. Box 132
Lyndon Center, VT 05850

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	GENERAL LIABILITY X COMMERCIAL GENERAL LIABILITY CLAIMS-MADE X OCCUR X Contractual Liab GEN'L AGGREGATE LIMIT APPLIES PER: POLICY X PRO-JECT LOC	X		DTCO584M645599	12/10/2014	12/10/2015	EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence) MED EXP (Any one person) PERSONAL & ADV INJURY GENERAL AGGREGATE PRODUCTS - COMP/OP AGG	$ 1,000,000 $ 300,000 $ 15,000 $ 1,000,000 $ 2,000,000 $ 2,000,000 $
A	AUTOMOBILE LIABILITY X ANY AUTO ALL OWNED AUTOS SCHEDULED AUTOS HIRED AUTOS NON-OWNED AUTOS			DT810584M645599	12/10/2014	12/10/2015	COMBINED SINGLE LIMIT (Ea accident) BODILY INJURY (Per person) BODILY INJURY (Per accident) PROPERTY DAMAGE (Per accident)	$ 1,000,000 $ $ $ $
A	X UMBRELLA LIAB X OCCUR EXCESS LIAB CLAIMS-MADE DED X RETENTION $ 10,000			DTCUP584M6455	12/10/2014	12/10/2015	EACH OCCURRENCE AGGREGATE	$ 10,000,000 $ 10,000,000 $
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? Y/N N (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	N/A		DTJUB-530M003	01/01/2015	01/01/2016	X WC STATU-TORY LIMITS OTH-ER E.L. EACH ACCIDENT E.L. DISEASE - EA EMPLOYEE E.L. DISEASE - POLICY LIMIT	 $ 1,000,000 $ 1,000,000 $ 1,000,000
A	Equipment Floater			QT660540M2764	12/10/2014	12/10/2015	SEE BELOW	IF APPLIES *

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Re: Lincoln BRF0188(8)

Certificate holder is additional insured for general liability with regard to this project with a signed contract.

CERTIFICATE HOLDER

VTAOT02

VT Agency of Transportation
Transportation Contracts
Specialist
One National Life Drive
Montpelier, VT 05633-5001

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

S Francis Diede

© 1988-2010 ACORD CORPORATION. All rights reserved.

The ACORD name and logo are registered marks of ACORD

No. BI- 438

POWER OF ATTORNEY
BERKLEY INSURANCE COMPANY
WILMINGTON, DELAWARE

NOTICE: The warning found elsewhere in this Power of Attorney affects the validity thereof. Please review carefully.

KNOW ALL MEN BY THESE PRESENTS, that BERKLEY INSURANCE COMPANY (the "Company"), a corporation duly organized and existing under the laws of the State of Delaware, having its principal office in Greenwich, CT, has made, constituted and appointed, and does by these presents make, constitute and appoint: ***Jonathon P. Shea, Steven M. Shea, S. Francine Beede or Susanne J. Megrath of Paige & Campbell, Inc. of Barre, Vermont*** its true and lawful Attorney-in-Fact, to sign its name as surety only as delineated below and to execute, seal, acknowledge and deliver any and all bonds and undertakings, with the exception of Financial Guaranty Insurance, providing that no single obligation shall exceed ***Twenty Five Million and 00/100 U.S. Dollars (U.S.$25,000,000.00)***, to the same extent as if such bonds had been duly executed and acknowledged by the regularly elected officers of the Company at its principal office in their own proper persons.

This Power of Attorney shall be construed and enforced in accordance with, and governed by, the laws of the State of Delaware, without giving effect to the principles of conflicts of laws thereof. This Power of Attorney is granted pursuant to the following resolutions which were duly and validly adopted at a meeting of the Board of Directors of the Company held on January 25, 2010:

RESOLVED, that, with respect to the Surety business written by Berkley Surety Group, the Chairman of the Board, Chief Executive Officer, President or any Vice President of the Company, in conjunction with the Secretary or any Assistant Secretary are hereby authorized to execute powers of attorney authorizing and qualifying the attorney-in-fact named therein to execute bonds, undertakings, recognizances, or other suretyship obligations on behalf of the Company, and to affix the corporate seal of the Company to powers of attorney executed pursuant hereto; and said officers may remove any such attorney-in-fact and revoke any power of attorney previously granted; and further

RESOLVED, that such power of attorney limits the acts of those named therein to the bonds, undertakings, recognizances, or other suretyship obligations specifically named therein, and they have no authority to bind the Company except in the manner and to the extent therein stated; and further

RESOLVED, that such power of attorney revokes all previous powers issued on behalf of the attorney-in-fact named; and further

RESOLVED, that the signature of any authorized officer and the seal of the Company may be affixed by facsimile to any power of attorney or certification thereof authorizing the execution and delivery of any bond, undertaking, recognizance, or other suretyship obligation of the Company; and such signature and seal when so used shall have the same force and effect as though manually affixed. The Company may continue to use for the purposes herein stated the facsimile signature of any person or persons who shall have been such officer or officers of the Company, notwithstanding the fact that they may have ceased to be such at the time when such instruments shall be issued.

IN WITNESS WHEREOF, the Company has caused these presents to be signed and attested by its appropriate officers and its corporate seal hereunto affixed this 10 day of May, 2013.

Attest: Berkley Insurance Company

(Seal) By _____ By _____
Ira S. Lederman — Jeffrey M. Hafter
Senior Vice President & Secretary — Senior Vice President

WARNING: THIS POWER INVALID IF NOT PRINTED ON BLUE "BERKLEY" SECURITY PAPER.

STATE OF CONNECTICUT)
) ss:
COUNTY OF FAIRFIELD)

Sworn to before me, a Notary Public in the State of Connecticut, this 10 day of May, 2013, by Ira S. Lederman and Jeffrey M. Hafter who are sworn to me to be the Senior Vice President and Secretary, and the Senior Vice President, respectively, of Berkley Insurance Company.

_____
Notary Public, State of Connecticut

KATHLEEN COREY
NOTARY PUBLIC
CONNECTICUT
MY COMMISSION EXPIRES OCTOBER 31, 2017

CERTIFICATE

I, the undersigned, Assistant Secretary of BERKLEY INSURANCE COMPANY, DO HEREBY CERTIFY that the foregoing is a true, correct and complete copy of the original Power of Attorney; that said Power of Attorney has not been revoked or rescinded and that the authority of the Attorney-in-Fact set forth therein, who executed the bond or undertaking to which this Power of Attorney is attached, is in full force and effect as of this date.

Given under my hand and seal of the Company, this 18 day of February, 2015.

(Seal) _____
Andrew M. Tuma

WARNING – Any unauthorized reproduction or alteration of this document is prohibited. This power of attorney is void unless seals are readable and the certification seal at the bottom is embossed. The background imprint, warning and confirmation (on reverse) must be in blue ink.

Instructions for Inquiries and Notices Under the Bond Attached to This Power

Berkley Surety Group is the affiliated underwriting manager for the surety business of: Acadia Insurance Company, Berkley Insurance Company, Berkley Regional Insurance Company, Carolina Casualty Insurance Company, Union Standard Insurance Company, Continental Western Insurance Company, and Union Insurance Company.

To verify the authenticity of the bond, please call (866) 768-3534 or email BSGInquiry@berkleysurety.com

---

Any written notices, inquiries, claims or demands to the surety on the bond to which this Rider is attached should be directed to:

Berkley Surety Group
412 Mount Kemble Avenue
Suite 310N
Morristown, NJ 07960
Attention: Surety Claims Department

Or

email BSGClaim@berkleysurety.com

Please include with all notices the bond number and the name of the principal on the bond. Where a claim is being asserted, please set forth generally the basis of the claim. In the case of a payment or performance bond, please identify the project to which the bond pertains.

No. BI- 438

POWER OF ATTORNEY
BERKLEY INSURANCE COMPANY
WILMINGTON, DELAWARE

NOTICE: The warning found elsewhere in this Power of Attorney affects the validity thereof. Please review carefully.

KNOW ALL MEN BY THESE PRESENTS, that BERKLEY INSURANCE COMPANY (the "Company"), a corporation duly organized and existing under the laws of the State of Delaware, having its principal office in Greenwich, CT, has made, constituted and appointed, and does by these presents make, constitute and appoint: ***Jonathon P. Shea, Steven M. Shea, S. Francine Beede or Susanne J. Megrath of Paige & Campbell, Inc. of Barre, Vermont*** its true and lawful Attorney-in-Fact, to sign its name as surety only as delineated below and to execute, seal, acknowledge and deliver any and all bonds and undertakings, with the exception of Financial Guaranty Insurance, providing that no single obligation shall exceed ***Twenty Five Million and 00/100 U.S. Dollars (U.S.$25,000,000.00)***, to the same extent as if such bonds had been duly executed and acknowledged by the regularly elected officers of the Company at its principal office in their own proper persons.

This Power of Attorney shall be construed and enforced in accordance with, and governed by, the laws of the State of Delaware, without giving effect to the principles of conflicts of laws thereof. This Power of Attorney is granted pursuant to the following resolutions which were duly and validly adopted at a meeting of the Board of Directors of the Company held on January 25, 2010:

RESOLVED, that, with respect to the Surety business written by Berkley Surety Group, the Chairman of the Board, Chief Executive Officer, President or any Vice President of the Company, in conjunction with the Secretary or any Assistant Secretary are hereby authorized to execute powers of attorney authorizing and qualifying the attorney-in-fact named therein to execute bonds, undertakings, recognizances, or other suretyship obligations on behalf of the Company, and to affix the corporate seal of the Company to powers of attorney executed pursuant hereto; and said officers may remove any such attorney-in-fact and revoke any power of attorney previously granted; and further

RESOLVED, that such power of attorney limits the acts of those named therein to the bonds, undertakings, recognizances, or other suretyship obligations specifically named therein, and they have no authority to bind the Company except in the manner and to the extent therein stated; and further

RESOLVED, that such power of attorney revokes all previous powers issued on behalf of the attorney-in-fact named; and further

RESOLVED, that the signature of any authorized officer and the seal of the Company may be affixed by facsimile to any power of attorney or certification thereof authorizing the execution and delivery of any bond, undertaking, recognizance, or other suretyship obligation of the Company; and such signature and seal when so used shall have the same force and effect as though manually affixed. The Company may continue to use for the purposes herein stated the facsimile signature of any person or persons who shall have been such officer or officers of the Company, notwithstanding the fact that they may have ceased to be such at the time when such instruments shall be issued.

IN WITNESS WHEREOF, the Company has caused these presents to be signed and attested by its appropriate officers and its corporate seal hereunto affixed this 10 day of May, 2013.

Attest: Berkley Insurance Company

(Seal) By _____ By _____

Ira S. Lederman
Senior Vice President & Secretary

Jeffrey M. Hafter
Senior Vice President

WARNING: THIS POWER INVALID IF NOT PRINTED ON BLUE "BERKLEY" SECURITY PAPER.

STATE OF CONNECTICUT)
) ss:
COUNTY OF FAIRFIELD)

Sworn to before me, a Notary Public in the State of Connecticut, this 10 day of May, 2013, by Ira S. Lederman and Jeffrey M. Hafter who are sworn to me to be the Senior Vice President and Secretary, and the Senior Vice President, respectively, of Berkley Insurance Company.

_____
Notary Public, State of Connecticut

KATHLEEN COREY
NOTARY PUBLIC
CONNECTICUT
MY COMMISSION EXPIRES OCTOBER 31, 2017

CERTIFICATE

I, the undersigned, Assistant Secretary of BERKLEY INSURANCE COMPANY, DO HEREBY CERTIFY that the foregoing is a true, correct and complete copy of the original Power of Attorney; that said Power of Attorney has not been revoked or rescinded and that the authority of the Attorney-in-Fact set forth therein, who executed the bond or undertaking to which this Power of Attorney is attached, is in full force and effect as of this date.

Given under my hand and seal of the Company, this 18 day of February, 2015.

(Seal) _____
Andrew M. Tuma

WARNING – Any unauthorized reproduction or alteration of this document is prohibited. This power of attorney is void unless seals are readable and the certification seal at the bottom is embossed. The background imprint, warning and confirmation (on reverse) must be in blue ink.

Instructions for Inquiries and Notices Under the Bond Attached to This Power

Berkley Surety Group is the affiliated underwriting manager for the surety business of: Acadia Insurance Company, Berkley Insurance Company, Berkley Regional Insurance Company, Carolina Casualty Insurance Company, Union Standard Insurance Company, Continental Western Insurance Company, and Union Insurance Company.

To verify the authenticity of the bond, please call (866) 768-3534 or email BSGInquiry@berkleysurety.com

---

Any written notices, inquiries, claims or demands to the surety on the bond to which this Rider is attached should be directed to:

Berkley Surety Group
412 Mount Kemble Avenue
Suite 310N
Morristown, NJ 07960
Attention: Surety Claims Department

Or

email BSGClaim@berkleysurety.com

Please include with all notices the bond number and the name of the principal on the bond. Where a claim is being asserted, please set forth generally the basis of the claim. In the case of a payment or performance bond, please identify the project to which the bond pertains.

Project
Lincoln BRF 0188 (8)

VERMONT
AGENCY OF TRANSPORTATION
2011 Standard Specifications for Construction

CONTRACT AGREEMENT

J.A. McDonald, Incorporated
585 Gilman Road
PO Box 132
Lyndon Center, VT 05850

Required Contract Provisions for Federal-Aid Construction
Standard Federal EEO Specifications
Vermont Agency of Transportation Contractor Workforce Reporting Requirements
Workers' Compensation; State Contracts Compliance Requirement
General Special Provisions dated December 2, 2014
Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants
Special Provisions
Vermont Minimum Labor & Truck Rates
Disadvantaged Business Enterprise (DBE) Policy Contract Requirements
US Department of Labor Davis – Bacon Wage Rates
Asphalt Price Adjustment Provisions dated April 6, 2010
Stream Alteration Consultation (e-mail) dated November 5, 2013
Construction General Permit (CGP) 3-9020 (Amended 2008) Authorization of Notice of Intent #7136-9020 dated January 28, 2014
Army Corps of Engineers Permit #NAE-2013-2487 dated December 12, 2013
Certification for Federal-Aid Contracts
Contractor's EEO Certification
Contract CA-111-B Form
Schedule of Items
Contractor's Signature Page

REQUIRED CONTRACT PROVISIONS
FEDERAL-AID CONSTRUCTION CONTRACTS

I. General
II. Nondiscrimination
III. Nonsegregated Facilities
IV. Davis-Bacon and Related Act Provisions
V. Contract Work Hours and Safety Standards Act Provisions
VI. Subletting or Assigning the Contract
VII. Safety: Accident Prevention
VIII. False Statements Concerning Highway Projects
IX. Implementation of Clean Air Act and Federal Water Pollution Control Act
X. Compliance with Governmentwide Suspension and Debarment Requirements
XI. Certification Regarding Use of Contract Funds for Lobbying

ATTACHMENTS

A. Employment and Materials Preference for Appalachian Development Highway System or Appalachian Local Access Road Contracts (included in Appalachian contracts only)

I. GENERAL

1. Form FHWA-1273 must be physically incorporated in each construction contract funded under Title 23 (excluding emergency contracts solely intended for debris removal). The contractor (or subcontractor) must insert this form in each subcontract and further require its inclusion in all lower tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services).

   The applicable requirements of Form FHWA-1273 are incorporated by reference for work done under any purchase order, rental agreement or agreement for other services. The prime contractor shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

   Form FHWA-1273 must be included in all Federal-aid design-build contracts, in all subcontracts and in lower tier subcontracts (excluding subcontracts for design services, purchase orders, rental agreements and other agreements for supplies or services). The design-builder shall be responsible for compliance by any subcontractor, lower-tier subcontractor or service provider.

   Contracting agencies may reference Form FHWA-1273 in bid proposal or request for proposal documents, however, the Form FHWA-1273 must be physically incorporated (not referenced) in all contracts, subcontracts and lower-tier subcontracts (excluding purchase orders, rental agreements and other agreements for supplies or services related to a construction contract).

2. Subject to the applicability criteria noted in the following sections, these contract provisions shall apply to all work performed on the contract by the contractor's own organization and with the assistance of workers under the contractor's immediate superintendence and to all work performed on the contract by piecework, station work, or by subcontract.

3. A breach of any of the stipulations contained in these Required Contract Provisions may be sufficient grounds for withholding of progress payments, withholding of final payment, termination of the contract, suspension / debarment or any other action determined to be appropriate by the contracting agency and FHWA.

4. Selection of Labor: During the performance of this contract, the contractor shall not use convict labor for any purpose within the limits of a construction project on a Federal-aid highway unless it is labor performed by convicts who are on parole, supervised release, or probation. The term Federal-aid highway does not include roadways functionally classified as local roads or rural minor collectors.

II. NONDISCRIMINATION

The provisions of this section related to 23 CFR Part 230 are applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more. The provisions of 23 CFR Part 230 are not applicable to material supply, engineering, or architectural service contracts.

In addition, the contractor and all subcontractors must comply with the following policies: Executive Order 11246, 41 CFR 60, 29 CFR 1625-1627, Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The contractor and all subcontractors must comply with: the requirements of the Equal Opportunity Clause in 41 CFR 60-1.4(b) and, for all construction contracts exceeding $10,000, the Standard Federal Equal Employment Opportunity Construction Contract Specifications in 41 CFR 60-4.3.

Note: The U.S. Department of Labor has exclusive authority to determine compliance with Executive Order 11246 and the policies of the Secretary of Labor including 41 CFR 60, and 29 CFR 1625-1627. The contracting agency and the FHWA have the authority and the responsibility to ensure compliance with Title 23 USC Section 140, the Rehabilitation Act of 1973, as amended (29 USC 794), and Title VI of the Civil Rights Act of 1964, as amended, and related regulations including 49 CFR Parts 21, 26 and 27; and 23 CFR Parts 200, 230, and 633.

The following provision is adopted from 23 CFR 230, Appendix A, with appropriate revisions to conform to the U.S. Department of Labor (US DOL) and FHWA requirements.

1. **Equal Employment Opportunity:** Equal employment opportunity (EEO) requirements not to discriminate and to take affirmative action to assure equal opportunity as set forth under laws, executive orders, rules, regulations (28 CFR 35, 29 CFR 1630, 29 CFR 1625-1627, 41 CFR 60 and 49 CFR 27) and orders of the Secretary of Labor as modified by the provisions prescribed herein, and imposed pursuant to 23 U.S.C. 140 shall constitute the EEO and specific affirmative action standards for the contractor's project activities under this contract. The provisions of the Americans with Disabilities Act of 1990 (42 U.S.C. 12101 et seq.) set forth under 28 CFR 35 and 29 CFR 1630 are incorporated by reference in this contract. In the execution of this contract, the contractor agrees to comply with the following minimum specific requirement activities of EEO:

   a. The contractor will work with the contracting agency and the Federal Government to ensure that it has made every good faith effort to provide equal opportunity with respect to all of its terms and conditions of employment and in their review of activities under the contract.

   b. The contractor will accept as its operating policy the following statement:

      "It is the policy of this Company to assure that applicants are employed, and that employees are treated during employment, without regard to their race, religion, sex, color, national origin, age or disability. Such action shall include: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship, pre-apprenticeship, and/or on-the-job training."

2. **EEO Officer:** The contractor will designate and make known to the contracting officers an EEO Officer who will have the responsibility for and must be capable of effectively administering and promoting an active EEO program and who must be assigned adequate authority and responsibility to do so.

3. **Dissemination of Policy:** All members of the contractor's staff who are authorized to hire, supervise, promote, and discharge employees, or who recommend such action, or who are substantially involved in such action, will be made fully cognizant of, and will implement, the contractor's EEO policy and contractual responsibilities to provide EEO in each grade and classification of employment. To ensure that the above agreement will be met, the following actions will be taken as a minimum:

   a. Periodic meetings of supervisory and personnel office employees will be conducted before the start of work and then not less often than once every six months, at which time the contractor's EEO policy and its implementation will be reviewed and explained. The meetings will be conducted by the EEO Officer.

   b. All new supervisory or personnel office employees will be given a thorough indoctrination by the EEO Officer, covering all major aspects of the contractor's EEO obligations within thirty days following their reporting for duty with the contractor.

c. All personnel who are engaged in direct recruitment for the project will be instructed by the EEO Officer in the contractor's procedures for locating and hiring minorities and women.

d. Notices and posters setting forth the contractor's EEO policy will be placed in areas readily accessible to employees, applicants for employment and potential employees.

e. The contractor's EEO policy and the procedures to implement such policy will be brought to the attention of employees by means of meetings, employee handbooks, or other appropriate means.

4. **Recruitment:** When advertising for employees, the contractor will include in all advertisements for employees the notation: "An Equal Opportunity Employer." All such advertisements will be placed in publications having a large circulation among minorities and women in the area from which the project work force would normally be derived.

a. The contractor will, unless precluded by a valid bargaining agreement, conduct systematic and direct recruitment through public and private employee referral sources likely to yield qualified minorities and women. To meet this requirement, the contractor will identify sources of potential minority group employees, and establish with such identified sources procedures whereby minority and women applicants may be referred to the contractor for employment consideration.

b. In the event the contractor has a valid bargaining agreement providing for exclusive hiring hall referrals, the contractor is expected to observe the provisions of that agreement to the extent that the system meets the contractor's compliance with EEO contract provisions. Where implementation of such an agreement has the effect of discriminating against minorities or women, or obligates the contractor to do the same, such implementation violates Federal nondiscrimination provisions.

c. The contractor will encourage its present employees to refer minorities and women as applicants for employment. Information and procedures with regard to referring such applicants will be discussed with employees.

5. **Personnel Actions:** Wages, working conditions, and employee benefits shall be established and administered, and personnel actions of every type, including hiring, upgrading, promotion, transfer, demotion, layoff, and termination, shall be taken without regard to race, color, religion, sex, national origin, age or disability. The following procedures shall be followed:

a. The contractor will conduct periodic inspections of project sites to insure that working conditions and employee facilities do not indicate discriminatory treatment of project site personnel.

b. The contractor will periodically evaluate the spread of wages paid within each classification to determine any evidence of discriminatory wage practices.

c. The contractor will periodically review selected personnel actions in depth to determine whether there is evidence of discrimination. Where evidence is found, the contractor will promptly take corrective action. If the review indicates that the discrimination may extend beyond the actions reviewed, such corrective action shall include all affected persons.

d. The contractor will promptly investigate all complaints of alleged discrimination made to the contractor in connection with its obligations under this contract, will attempt to resolve such complaints, and will take appropriate corrective action within a reasonable time. If the investigation indicates that the discrimination may affect persons other than the complainant, such corrective action shall include such other persons. Upon completion of each investigation, the contractor will inform every complainant of all of their avenues of appeal.

6. **Training and Promotion:**

a. The contractor will assist in locating, qualifying, and increasing the skills of minorities and women who are applicants for employment or current employees. Such efforts should be aimed at developing full journey level status employees in the type of trade or job classification involved.

b. Consistent with the contractor's work force requirements and as permissible under Federal and State regulations, the contractor shall make full use of training programs, i.e., apprenticeship, and on-the-job training programs for the geographical area of contract performance. In the event a special provision for training is provided under this contract, this subparagraph will be superseded as indicated in the special provision. The contracting agency may reserve training positions for persons who receive welfare assistance in accordance with 23 U.S.C. 140(a).

c. The contractor will advise employees and applicants for employment of available training programs and entrance requirements for each.

d. The contractor will periodically review the training and promotion potential of employees who are minorities and women and will encourage eligible employees to apply for such training and promotion.

7. **Unions:** If the contractor relies in whole or in part upon unions as a source of employees, the contractor will use good faith efforts to obtain the cooperation of such unions to increase opportunities for minorities and women. Actions by the contractor, either directly or through a contractor's association acting as agent, will include the procedures set forth below:

a. The contractor will use good faith efforts to develop, in cooperation with the unions, joint training programs aimed toward qualifying more minorities and women for membership in the unions and increasing the skills of minorities and women so that they may qualify for higher paying employment.

b. The contractor will use good faith efforts to incorporate an EEO clause into each union agreement to the end that such union will be contractually bound to refer applicants without regard to their race, color, religion, sex, national origin, age or disability.

c. The contractor is to obtain information as to the referral practices and policies of the labor union except that to the extent such information is within the exclusive possession of the labor union and such labor union refuses to furnish such information to the contractor, the contractor shall so certify to the contracting agency and shall set forth what efforts have been made to obtain such information.

d. In the event the union is unable to provide the contractor with a reasonable flow of referrals within the time limit set forth in the collective bargaining agreement, the contractor will, through independent recruitment efforts, fill the employment vacancies without regard to race, color, religion, sex, national origin, age or disability; making full efforts to obtain qualified and/or qualifiable minorities and women. The failure of a union to provide sufficient referrals (even though it is obligated to provide exclusive referrals under the terms of a collective bargaining agreement) does not relieve the contractor from the requirements of this paragraph. In the event the union referral practice prevents the contractor from meeting the obligations pursuant to Executive Order 11246, as amended, and these special provisions, such contractor shall immediately notify the contracting agency.

8. **Reasonable Accommodation for Applicants / Employees with Disabilities:** The contractor must be familiar with the requirements for and comply with the Americans with Disabilities Act and all rules and regulations established there under. Employers must provide reasonable accommodation in all employment activities unless to do so would cause an undue hardship.

9. **Selection of Subcontractors, Procurement of Materials and Leasing of Equipment:** The contractor shall not discriminate on the grounds of race, color, religion, sex, national origin, age or disability in the selection and retention of subcontractors, including procurement of materials and leases of equipment. The contractor shall take all necessary and reasonable steps to ensure nondiscrimination in the administration of this contract.

a. The contractor shall notify all potential subcontractors and suppliers and lessors of their EEO obligations under this contract.

b. The contractor will use good faith efforts to ensure subcontractor compliance with their EEO obligations.

10. **Assurance Required by 49 CFR 26.13(b):**

a. The requirements of 49 CFR Part 26 and the State DOT's U.S. DOT-approved DBE program are incorporated by reference.

b. The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the contracting agency deems appropriate.

11. **Records and Reports:** The contractor shall keep such records as necessary to document compliance with the EEO requirements. Such records shall be retained for a period of three years following the date of the final payment to the contractor for all contract work and shall be available at reasonable times and places for inspection by authorized representatives of the contracting agency and the FHWA.

a. The records kept by the contractor shall document the following:

(1) The number and work hours of minority and non-minority group members and women employed in each work classification on the project;

(2) The progress and efforts being made in cooperation with unions, when applicable, to increase employment opportunities for minorities and women; and

(3) The progress and efforts being made in locating, hiring, training, qualifying, and upgrading minorities and women;

b. The contractors and subcontractors will submit an annual report to the contracting agency each July for the duration of the project, indicating the number of minority, women, and non-minority group employees currently engaged in each work classification required by the contract work. This information is to be reported on Form FHWA-1391. The staffing data should represent the project work force on board in all or any part of the last payroll period preceding the end of July. If on-the-job training is being required by special provision, the contractor will be required to collect and report training data. The employment data should reflect the work force on board during all or any part of the last payroll period preceding the end of July.

III. NONSEGREGATED FACILITIES

This provision is applicable to all Federal-aid construction contracts and to all related construction subcontracts of $10,000 or more.

The contractor must ensure that facilities provided for employees are provided in such a manner that segregation on the basis of race, color, religion, sex, or national origin cannot result. The contractor may neither require such segregated use by written or oral policies nor tolerate such use by employee custom. The contractor's obligation extends further to ensure that its employees are not assigned to perform their services at any location, under the contractor's control, where the facilities are segregated. The term "facilities" includes waiting rooms, work areas, restaurants and other eating areas, time clocks, restrooms, washrooms, locker rooms, and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing provided for employees. The contractor shall provide separate or single-user restrooms and necessary dressing or sleeping areas to assure privacy between sexes.

IV. DAVIS-BACON AND RELATED ACT PROVISIONS

This section is applicable to all Federal-aid construction projects exceeding $2,000 and to all related subcontracts and lower-tier subcontracts (regardless of subcontract size). The requirements apply to all projects located within the right-of-way of a roadway that is functionally classified as Federal-aid highway. This excludes roadways functionally classified as local roads or rural minor collectors, which are exempt. Contracting agencies may elect to apply these requirements to other projects.

The following provisions are from the U.S. Department of Labor regulations in 29 CFR 5.5 "Contract provisions and related matters" with minor revisions to conform to the FHWA-1273 format and FHWA program requirements.

1. **Minimum wages**

a. All laborers and mechanics employed or working upon the site of the work, will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account (except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3)), the full amount of wages and bona fide fringe benefits (or cash equivalents thereof) due at time of payment computed at rates not less than those contained in the wage determination of the Secretary of Labor which is attached hereto and made a part hereof, regardless of any contractual relationship which may be alleged to exist between the contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of paragraph 1.d. of this section; also, regular contributions made or costs incurred for more than a weekly period (but not less often than quarterly) under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, That the employer's payroll records accurately set forth the time spent in each classification in which work is performed. The wage determination (including any additional classification and wage rates conformed under paragraph 1.b. of this section) and the Davis-Bacon poster (WH–1321) shall be posted at all times by the contractor and its subcontractors at the site of the work in a prominent and accessible place where it can be easily seen by the workers.

b. (1) The contracting officer shall require that any class of laborers or mechanics, including helpers, which is not listed in the wage determination and which is to be employed under the contract shall be classified in conformance with the wage determination. The contracting officer shall approve an additional classification and wage rate and fringe benefits therefore only when the following criteria have been met:

(i) The work to be performed by the classification requested is not performed by a classification in the wage determination; and
(ii) The classification is utilized in the area by the construction industry; and
(iii) The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.

(2) If the contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the contracting officer agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the contracting officer to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210. The Administrator, or an authorized representative, will approve, modify, or disapprove every additional classification action within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(3) In the event the contractor, the laborers or mechanics to be employed in the classification or their representatives, and the contracting officer do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the contracting officer shall refer the questions, including the views of all interested parties and the recommendation of the contracting officer, to the Wage and Hour Administrator for determination. The Wage and Hour Administrator, or an authorized representative, will issue a determination within 30 days of receipt and so advise the contracting officer or will notify the contracting officer within the 30-day period that additional time is necessary.

(4) The wage rate (including fringe benefits where appropriate) determined pursuant to paragraphs 1.b.(2) or 1.b.(3) of this section, shall be paid to all workers performing work in the classification under this contract from the first day on which work is performed in the classification.

c. Whenever the minimum wage rate prescribed in the contract for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, the contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.

d. If the contractor does not make payments to a trustee or other third person, the contractor may consider as part of the wages of any laborer or mechanic the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, Provided, That the Secretary of Labor has found, upon the written request of the contractor, that the applicable standards of the Davis-Bacon Act have been met. The Secretary of Labor may require the contractor to set aside in a separate account assets for the meeting of obligations under the plan or program.

2. **Withholding**

The contracting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the contractor under this contract, or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same prime contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and mechanics, including apprentices, trainees, and helpers, employed by the contractor or any subcontractor the full amount of wages required by the contract. In the event of failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the site of the work, all or part of the wages required by the contract, the contracting agency may, after written notice to the contractor, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

3. **Payrolls and basic records**

a. Payrolls and basic records relating thereto shall be maintained by the contractor during the course of the work and preserved for a period of three years thereafter for all laborers and mechanics working at the site of the work. Such records shall contain the name, address, and social security number of each such worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the contractor shall maintain records which show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.

b. (1) The contractor shall submit weekly for each week in which any contract work is performed a copy of all payrolls to the contracting agency. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g. , the last four digits of the employee's social security number). The required weekly payroll information may be submitted in any form desired. Optional Form WH–347 is available for this purpose from the Wage and Hour Division Web site at http://www.dol.gov/esa/whd/forms/wh347instr.htm or its successor site. The prime contractor is responsible for the submission of copies of payrolls by all subcontractors. Contractors and subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the contracting agency for transmission to the State DOT, the FHWA or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. It is not a violation of this section for a prime contractor to require a subcontractor to provide addresses and social security numbers to the prime contractor for its own records, without weekly submission to the contracting agency.

(2) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(i) That the payroll for the payroll period contains the information required to be provided under §5.5 (a)(3)(ii) of Regulations, 29 CFR part 5, the appropriate information is being maintained under §5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and that such information is correct and complete;

(ii) That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;

(iii) That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(3) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH–347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 3.b.(2) of this section.

(4) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.

c. The contractor or subcontractor shall make the records required under paragraph 3.a. of this section available for inspection, copying, or transcription by authorized representatives of the contracting agency, the State DOT, the FHWA, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the FHWA may, after written notice to the contractor, the contracting agency or the State DOT, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4. Apprentices and trainees

a. Apprentices (programs of the USDOL).

Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice.

The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed.

Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination.

In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

b. Trainees (programs of the USDOL).

Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration.

The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration.

Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed.

In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

c. Equal employment opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.

d. Apprentices and Trainees (programs of the U.S. DOT).

Apprentices and trainees working under apprenticeship and skill training programs which have been certified by the Secretary of Transportation as promoting EEO in connection with Federal-aid highway construction programs are not subject to the requirements of paragraph 4 of this Section IV. The straight time hourly wage rates for apprentices and trainees under such programs will be established by the particular programs. The ratio of apprentices and trainees to journeymen shall not be greater than permitted by the terms of the particular program.

5. **Compliance with Copeland Act requirements.** The contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this contract.

6. **Subcontracts.** The contractor or subcontractor shall insert Form FHWA-1273 in any subcontracts and also require the subcontractors to include Form FHWA-1273 in any lower tier subcontracts. The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR 5.5.

7. **Contract termination: debarment.** A breach of the contract clauses in 29 CFR 5.5 may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. **Compliance with Davis-Bacon and Related Act requirements.** All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. **Disputes concerning labor standards.** Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. **Certification of eligibility.**

    a. By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

    b. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

    c. The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

V. CONTRACT WORK HOURS AND SAFETY STANDARDS ACT

The following clauses apply to any Federal-aid construction contract in an amount in excess of $100,000 and subject to the overtime provisions of the Contract Work Hours and Safety Standards Act. These clauses shall be inserted in addition to the clauses required by 29 CFR 5.5(a) or 29 CFR 4.6. As used in this paragraph, the terms laborers and mechanics include watchmen and guards.

1. **Overtime requirements.** No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. **Violation; liability for unpaid wages; liquidated damages.** In the event of any violation of the clause set forth in paragraph (1.) of this section, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph (1.) of this section, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph (1.) of this section.

3. **Withholding for unpaid wages and liquidated damages.** The FHWA or the contacting agency shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph (2.) of this section.

4. **Subcontracts.** The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraph (1.) through (4.) of this section and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs (1.) through (4.) of this section.

VI. SUBLETTING OR ASSIGNING THE CONTRACT

This provision is applicable to all Federal-aid construction contracts on the National Highway System.

1. The contractor shall perform with its own organization contract work amounting to not less than 30 percent (or a greater percentage if specified elsewhere in the contract) of the total original contract price, excluding any specialty items designated by the contracting agency. Specialty items may be performed by subcontract and the amount of any such specialty items performed may be deducted from the total original contract price before computing the amount of work required to be performed by the contractor's own organization (23 CFR 635.116).

   a. The term "perform work with its own organization" refers to workers employed or leased by the prime contractor, and equipment owned or rented by the prime contractor, with or without operators. Such term does not include employees or equipment of a subcontractor or lower tier subcontractor, agents of the prime contractor, or any other assignees. The term may include payments for the costs of hiring leased employees from an employee leasing firm meeting all relevant Federal and State regulatory requirements. Leased employees may only be included in this term if the prime contractor meets all of the following conditions:

   (1) the prime contractor maintains control over the supervision of the day-to-day activities of the leased employees;

   (2) the prime contractor remains responsible for the quality of the work of the leased employees;

   (3) the prime contractor retains all power to accept or exclude individual employees from work on the project; and

   (4) the prime contractor remains ultimately responsible for the payment of predetermined minimum wages, the submission of payrolls, statements of compliance and all other Federal regulatory requirements.

   B "Specialty Items" shall be construed to be limited to work that requires highly specialized knowledge, abilities, or equipment not ordinarily available in the type of contracting organizations qualified and expected to bid or propose on the contract as a whole and in general are to be limited to minor components of the overall contract.

2. The contract amount upon which the requirements set forth in paragraph (1) of Section VI is computed includes the cost of material and manufactured products which are to be purchased or produced by the contractor under the contract provisions.

3. The contractor shall furnish (a) a competent superintendent or supervisor who is employed by the firm, has full authority to direct performance of the work in accordance with the contract requirements, and is in charge of all construction operations (regardless of who performs the work) and (b) such other of its own organizational resources (supervision, management, and engineering services) as the contracting officer determines is necessary to assure the performance of the contract.

4. No portion of the contract shall be sublet, assigned or otherwise disposed of except with the written consent of the contracting officer, or authorized representative, and such consent when given shall not be construed to relieve the contractor of any responsibility for the fulfillment of the contract. Written consent will be given only after the contracting agency has assured that each subcontract is evidenced in writing and that it contains all pertinent provisions and requirements of the prime contract.

5. The 30% self-performance requirement of paragraph (1) is not applicable to design-build contracts; however, contracting agencies may establish their own self-performance requirements.

VII. SAFETY: ACCIDENT PREVENTION

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

1. In the performance of this contract the contractor shall comply with all applicable Federal, State, and local laws governing safety, health, and sanitation (23 CFR 635). The contractor shall provide all safeguards, safety devices and protective equipment and take any other needed actions as it determines, or as the contracting officer may determine, to be reasonably necessary to protect the life and health of employees on the job and the safety of the public and to protect property in connection with the performance of the work covered by the contract.

2. It is a condition of this contract, and shall be made a condition of each subcontract, which the contractor enters into pursuant to this contract, that the contractor and any subcontractor shall not permit any employee, in performance of the contract, to work in surroundings or under conditions which are unsanitary, hazardous or dangerous to his/her health or safety, as determined under construction safety and health standards (29 CFR 1926) promulgated by the Secretary of Labor, in accordance with Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C. 3704).

3. Pursuant to 29 CFR 1926.3, it is a condition of this contract that the Secretary of Labor or authorized representative thereof, shall have right of entry to any site of contract performance to inspect or investigate the matter of compliance with the construction safety and health standards and to carry out the duties of the Secretary under Section 107 of the Contract Work Hours and Safety Standards Act (40 U.S.C.3704).

VIII. FALSE STATEMENTS CONCERNING HIGHWAY PROJECTS

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

In order to assure high quality and durable construction in conformity with approved plans and specifications and a high degree of reliability on statements and representations made by engineers, contractors, suppliers, and workers on Federal-aid highway projects, it is essential that all persons concerned with the project perform their functions as carefully, thoroughly, and honestly as possible. Willful falsification, distortion, or misrepresentation with respect to any facts related to the project is a violation of Federal law. To prevent any misunderstanding regarding the seriousness of these and similar acts, Form FHWA-1022 shall be posted on each Federal-aid highway project (23 CFR 635) in one or more places where it is readily available to all persons concerned with the project:

18 U.S.C. 1020 reads as follows:

"Whoever, being an officer, agent, or employee of the United States, or of any State or Territory, or whoever, whether a person, association, firm, or corporation, knowingly makes any false statement, false representation, or false report as to the character, quality, quantity, or cost of the material used or to be used, or the quantity or quality of the work performed or to be performed, or the cost thereof in connection with the submission of plans, maps, specifications, contracts, or costs of construction on any highway or related project submitted for approval to the Secretary of Transportation; or

Whoever knowingly makes any false statement, false representation, false report or false claim with respect to the character, quality, quantity, or cost of any work performed or to be performed, or materials furnished or to be furnished, in connection with the construction of any highway or related project approved by the Secretary of Transportation; or

Whoever knowingly makes any false statement or false representation as to material fact in any statement, certificate, or report submitted pursuant to provisions of the Federal-aid Roads Act approved July 1, 1916, (39 Stat. 355), as amended and supplemented;

Shall be fined under this title or imprisoned not more than 5 years or both."

IX. IMPLEMENTATION OF CLEAN AIR ACT AND FEDERAL WATER POLLUTION CONTROL ACT

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts.

By submission of this bid/proposal or the execution of this contract, or subcontract, as appropriate, the bidder, proposer, Federal-aid construction contractor, or subcontractor, as appropriate, will be deemed to have stipulated as follows:

1. That any person who is or will be utilized in the performance of this contract is not prohibited from receiving an award due to a violation of Section 508 of the Clean Water Act or Section 306 of the Clean Air Act.

2. That the contractor agrees to include or cause to be included the requirements of paragraph (1) of this Section X in every subcontract, and further agrees to take such action as the contracting agency may direct as a means of enforcing such requirements.

X. CERTIFICATION REGARDING DEBARMENT, SUSPENSION, INELIGIBILITY AND VOLUNTARY EXCLUSION

This provision is applicable to all Federal-aid construction contracts, design-build contracts, subcontracts, lower-tier subcontracts, purchase orders, lease agreements, consultant contracts or any other covered transaction requiring FHWA approval or that is estimated to cost $25,000 or more – as defined in 2 CFR Parts 180 and 1200.

1. **Instructions for Certification – First Tier Participants:**

   a. By signing and submitting this proposal, the prospective first tier participant is providing the certification set out below.

   b. The inability of a person to provide the certification set out below will not necessarily result in denial of participation in this covered transaction. The prospective first tier participant shall submit an explanation of why it cannot provide the certification set out below. The certification or explanation will be considered in connection with the department or agency's determination whether to enter into this transaction. However, failure of the prospective first tier participant to furnish a certification or an explanation shall disqualify such a person from participation in this transaction.

   c. The certification in this clause is a material representation of fact upon which reliance was placed when the contracting agency determined to enter into this transaction. If it is later determined that the prospective participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the contracting agency may terminate this transaction for cause of default.

   d. The prospective first tier participant shall provide immediate written notice to the contracting agency to whom this proposal is submitted if any time the prospective first tier participant learns that its certification was erroneous when submitted or has become erroneous by reason of changed circumstances.

   e. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

   f. The prospective first tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency entering into this transaction.

   g. The prospective first tier participant further agrees by submitting this proposal that it will include the clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transactions," provided by the department or contracting agency, entering into this covered transaction, without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

   h. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

   i. Nothing contained in the foregoing shall be construed to require the establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of the prospective participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

j. Except for transactions authorized under paragraph (f) of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency may terminate this transaction for cause or default.

*****

2. **Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion – First Tier Participants:**

a. The prospective first tier participant certifies to the best of its knowledge and belief, that it and its principals:

(1) Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency;

(2) Have not within a three-year period preceding this proposal been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;

(3) Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph (a)(2) of this certification; and

(4) Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.

b. Where the prospective participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

2. **Instructions for Certification - Lower Tier Participants:**

(Applicable to all subcontracts, purchase orders and other lower tier transactions requiring prior FHWA approval or estimated to cost $25,000 or more - 2 CFR Parts 180 and 1200)

a. By signing and submitting this proposal, the prospective lower tier is providing the certification set out below.

b. The certification in this clause is a material representation of fact upon which reliance was placed when this transaction was entered into. If it is later determined that the prospective lower tier participant knowingly rendered an erroneous certification, in addition to other remedies available to the Federal Government, the department, or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

c. The prospective lower tier participant shall provide immediate written notice to the person to which this proposal is submitted if at any time the prospective lower tier participant learns that its certification was erroneous by reason of changed circumstances.

d. The terms "covered transaction," "debarred," "suspended," "ineligible," "participant," "person," "principal," and "voluntarily excluded," as used in this clause, are defined in 2 CFR Parts 180 and 1200. You may contact the person to which this proposal is submitted for assistance in obtaining a copy of those regulations. "First Tier Covered Transactions" refers to any covered transaction between a grantee or subgrantee of Federal funds and a participant (such as the prime or general contract). "Lower Tier Covered Transactions" refers to any covered transaction under a First Tier Covered Transaction (such as subcontracts). "First Tier Participant" refers to the participant who has entered into a covered transaction with a grantee or subgrantee of Federal funds (such as the prime or general contractor). "Lower Tier Participant" refers any participant who has entered into a covered transaction with a First Tier Participant or other Lower Tier Participants (such as subcontractors and suppliers).

e. The prospective lower tier participant agrees by submitting this proposal that, should the proposed covered transaction be entered into, it shall not knowingly enter into any lower tier covered transaction with a person who is debarred, suspended, declared ineligible, or voluntarily excluded from participation in this covered transaction, unless authorized by the department or agency with which this transaction originated.

f. The prospective lower tier participant further agrees by submitting this proposal that it will include this clause titled "Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion-Lower Tier Covered Transaction," without modification, in all lower tier covered transactions and in all solicitations for lower tier covered transactions exceeding the $25,000 threshold.

g. A participant in a covered transaction may rely upon a certification of a prospective participant in a lower tier covered transaction that is not debarred, suspended, ineligible, or voluntarily excluded from the covered transaction, unless it knows that the certification is erroneous. A participant is responsible for ensuring that its principals are not suspended, debarred, or otherwise ineligible to participate in covered transactions. To verify the eligibility of its principals, as well as the eligibility of any lower tier prospective participants, each participant may, but is not required to, check the Excluded Parties List System website (https://www.epls.gov/), which is compiled by the General Services Administration.

h. Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render in good faith the certification required by this clause. The knowledge and information of participant is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

i. Except for transactions authorized under paragraph e of these instructions, if a participant in a covered transaction knowingly enters into a lower tier covered transaction with a person who is suspended, debarred, ineligible, or voluntarily excluded from participation in this transaction, in addition to other remedies available to the Federal Government, the department or agency with which this transaction originated may pursue available remedies, including suspension and/or debarment.

*****

Certification Regarding Debarment, Suspension, Ineligibility and Voluntary Exclusion--Lower Tier Participants:

1. The prospective lower tier participant certifies, by submission of this proposal, that neither it nor its principals is presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participating in covered transactions by any Federal department or agency.

2. Where the prospective lower tier participant is unable to certify to any of the statements in this certification, such prospective participant shall attach an explanation to this proposal.

*****

XI. CERTIFICATION REGARDING USE OF CONTRACT FUNDS FOR LOBBYING

This provision is applicable to all Federal-aid construction contracts and to all related subcontracts which exceed $100,000 (49 CFR 20).

1. The prospective participant certifies, by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

a. No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

b. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

2. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by 31 U.S.C. 1352. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

3. The prospective participant also agrees by submitting its bid or proposal that the participant shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such recipients shall certify and disclose accordingly.

ATTACHMENT A - EMPLOYMENT AND MATERIALS PREFERENCE FOR APPALACHIAN DEVELOPMENT HIGHWAY SYSTEM OR APPALACHIAN LOCAL ACCESS ROAD CONTRACTS

This provision is applicable to all Federal-aid projects funded under the Appalachian Regional Development Act of 1965.

1. During the performance of this contract, the contractor undertaking to do work which is, or reasonably may be, done as on-site work, shall give preference to qualified persons who regularly reside in the labor area as designated by the DOL wherein the contract work is situated, or the subregion, or the Appalachian counties of the State wherein the contract work is situated, except:

   a. To the extent that qualified persons regularly residing in the area are not available.

   b. For the reasonable needs of the contractor to employ supervisory or specially experienced personnel necessary to assure an efficient execution of the contract work.

   c. For the obligation of the contractor to offer employment to present or former employees as the result of a lawful collective bargaining contract, provided that the number of nonresident persons employed under this subparagraph (1c) shall not exceed 20 percent of the total number of employees employed by the contractor on the contract work, except as provided in subparagraph (4) below.

2. The contractor shall place a job order with the State Employment Service indicating (a) the classifications of the laborers, mechanics and other employees required to perform the contract work, (b) the number of employees required in each classification, (c) the date on which the participant estimates such employees will be required, and (d) any other pertinent information required by the State Employment Service to complete the job order form. The job order may be placed with the State Employment Service in writing or by telephone. If during the course of the contract work, the information submitted by the contractor in the original job order is substantially modified, the participant shall promptly notify the State Employment Service.

3. The contractor shall give full consideration to all qualified job applicants referred to him by the State Employment Service. The contractor is not required to grant employment to any job applicants who, in his opinion, are not qualified to perform the classification of work required.

4. If, within one week following the placing of a job order by the contractor with the State Employment Service, the State Employment Service is unable to refer any qualified job applicants to the contractor, or less than the number requested, the State Employment Service will forward a certificate to the contractor indicating the unavailability of applicants. Such certificate shall be made a part of the contractor's permanent project records. Upon receipt of this certificate, the contractor may employ persons who do not normally reside in the labor area to fill positions covered by the certificate, notwithstanding the provisions of subparagraph (1c) above.

5. The provisions of 23 CFR 633.207(e) allow the contracting agency to provide a contractual preference for the use of mineral resource materials native to the Appalachian region.

6. The contractor shall include the provisions of Sections 1 through 4 of this Attachment A in every subcontract for work which is, or reasonably may be, done as on-site work.

CA-26

STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (EXECUTIVE ORDER 11246)

1. As used in these specifications:

   a. "Covered Area" means the geographical area described in the solicitation from which this contract resulted.

   b. "Director" means Director, Office of Federal Contract Compliance Programs, United States Department of Labor, or any person to whom the Director delegates authority.

   c. "Employer Identification Number" means the Federal Social Security Number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941.

   A Minority Group Member is:

   ...American Indian or Alaskan Native
   consisting of all persons having origins in any of the original people of North American and who maintain cultural identification through tribal affiliations or community recognition.

   ...Black
   consisting of all persons having origins in any of the Black racial groups of Africa.

   ...Asian or Pacific Islander
   consisting of all persons having origins in any of the original people of the Far East, Southeast Asia, the Indian Sub-Continent or the Pacific Islands. This area includes China, India, Japan, Korea, the Philippines and Samoa.

   ...Hispanic
   consisting of all persons of Mexican, Puerto Rican, Cuban, Central or South American or other Spanish culture or origin.

   ...Cape Verde an
   consisting of all persons having origins in the Cape Verde Islands.

   ...Portuguese
   consisting of all persons of Portuguese, Brazilian or other Portuguese culture or origin.

2. Whenever the Contractor, or any Subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of $10,000.00 the provisions of these specifications and the notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the Contractor is participating (pursuant to 41 CFR 60-4.5) in the Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors must be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each Contractor or subcontract participating in an approved Plan is individually required to comply with its obligations under the EEO clause, and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. the overall good faith performance by other Contractors or subcontractors toward a goal in an approved Plan does not excuse any covered Contractor's or subcontractor's failure to make good faith efforts to achieve the Plan goals and timetables.

4. The Contractor shall implement the specific affirmative action standards provided in Paragraphs 7a through p of these specifications. The goals set for the Contractor in the solicitation from which this contract resulted are expressed as percentages in the total hours of employment and training of minority and female utilization the Contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. The Contractor is expected to make substantially uniform progress toward its goals in each craft during the period specified.

5. Neither the provisions of any collective bargaining agreement nor the failure by a union with whom the Contractor has a collective bargaining agreement to refer either minority or women shall excuse the Contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the non-working training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees must be employed by the Contractor during the training period, and the Contractor must have made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees must be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The Contractor shall take specific affirmative actions to ensure equal employment opportunity . The evaluation of the Contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The Contractor shall document these efforts fully and shall implement affirmative action steps at least as extensive as the following:

   a. Ensure and maintain a working environment free of harassment, intimidation and coercion at all sites, and in all facilities at which the Contractor's employees are assigned to work. The Contractor, where possible, will assign two or more women to each construction project. The Contractor shall specifically ensure that all foremen, superintendents, and other on-site supervisory personnel are aware of and carry out the Contractor's obligation to maintain such a working environment with specific attention to minority or female individuals working at such sites or in such facilities.

   b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the Contractor or its unions have employment opportunities available and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the Contractor by the union or, if referred, not employed by the Contractor, this shall be documented in the file with the reason therefor, along with whatever additional actions the Contractor may have taken.

d. Provide immediate written notifications to the Regional Director when the union or unions, with which the Contractor has a collective bargaining agreement, have not referred to the Contractor a minority person or woman sent by the Contractor or when the Contractor has other information that the union referral process has impeded the Contractor's efforts to meet its obligations.

e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the Contractor's employment needs, especially those programs funded or approved by the Department of Labor. The Contractor shall provide notice of these programs to the sources compiled under Paragraph 7b above.

f. Disseminate the Contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the Contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction is performed.

g. Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination or other employment decisions including specific review of these items with on-site supervisory personnel such as Superintendents, Supervisors etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the Contractor's EEO policy externally by including it in any advertising in the news media, and providing written notification to, and discussing the Contractor's EEO policy with, other Contractors and subcontractors with whom the Contractor anticipates doing business.

i. Direct its recruitment efforts, both oral and written, to minority, female and community organizations, to schools with minority and female students and to minority and female recruitment and training organizations serving the Contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the Contractor shall send written notifications to organizations such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer and vacation employment to minority and female youth both on the site and in other areas of a Contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments and other personnel practices, do not have a discriminatory effect by continually monitoring all personnel and employment-related activities to ensure that the EEO policy and Contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are non-segregated except that separate or single-user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the Contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations which assist in fulfilling one or more of their affirmative action obligations (Paragraph 7a through p). The efforts of a contractor association, joint contractor-union, contractor-community, or other similar group of which the Contractor is a member and participant, may be asserted as fulfilling any one or more of its obligations under Paragraph 7a through p of these Specifications provided that the Contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, reflected in the Contractor's minority and female workforce participation , makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the Contractor. The obligation to comply, however, is the Contractor's, and failure of such a group to fulfill an obligation shall not be a defense for the Contractor's non-compliance.

9. A single goal for minorities and a separate single goal for women have been established. The Contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, the Contractor may be in violation of the Executive Order if a particular group is employed in a substantially disparate manner (for example, even though the Contractor has achieved its goals for women generally, the Contractor may be in violation of the Executive Order if a specific minority group of women is under-utilized).

10. The Contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex or national origin.

11. The Contractor shall not enter into any subcontract with any person for firm debarred from Government contracts pursuant to Executive Order 11246.

12. The Contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, terminations and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any Contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The Contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in Paragraph 7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the Contractor fails to comply with the requirements of the Executive Order, the implementing regulations or these specifications, the Director shall proceed in accordance with 41 CFR 60-4.8.

14. The Contractor shall designate a responsible official to monitor all employment-related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government and to keep records. Records shall at least include for each employee the name, address, telephone numbers, construction trade union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application or requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

NOTICE OF REQUIREMENTS FOR AFFIRMATIVE ACTION TO ENSURE EQUAL EMPLOYMENT OPPORTUNITY (EXECUTIVE ORDER 11246)

1. The Offeror's or Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Specifications" set forth herein.

2. The goals and timetables for minority and female participation, expressed in percentage terms for the Contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

Economic Areas	Timetables	Goals for Minority participation for each trade (%)	Goals for Female Participation in each trade (%)
Entire State of Vermont:			
Vermont 003 Burlington, VT Non-SMSA Counties NH Coos; NH Grafton: NH Sullivan; VT Addison; VT Caledonia; VT Chittenden; VT Essex; VT Franklin; VT Grand Isle; VT Lamoille; VT Orange; VT Orleans; VT Rutland; VT Washington; VT Windsor	Indefinite	0.8	6.9
Connecticut (Mass) 006 Hartford - New Haven Springfield, CT-MA Non-SMSA Counties CT Litchfield; CT Windham; MA Franklin; NH Cheshire; VT Windham	Indefinite	5.9	
New York 007 Albany - Schnectady - Troy, NY Non-SMSA Counties NY Clinton; NY Columbia; NY Essex; NY Fulton; NY Greene; NY Hamilton; NY Sohoharie; NY Warren; NY Washington; VT Bennington	Indefinite	2.6	

These goals are applicable to all the Contractor's construction work (whether or not it is Federal or federally assisted) performed in the covered area. If the Contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the Contractor also is subject to the goals for both its federally involved and non-federally involved construction.

The Contractor's compliance with the Executive Order and the regulation in CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3 (a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract and in each trade, and the Contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs within ten working days of award of any construction subcontract in excess of $10,000.00 at any tier for construction work under the contract resulting from this solicitation. The notifications shall list the name, address and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; and the geographical area in which the subcontract is to be performed.

4. As used in this Notice, and in the contract resulting from this solicitation, the "covered area" is (insert description of the geographical areas where the contract is to be performed giving the state, county and city, if any)

VERMONT AGENCY OF TRANSPORTATION
CONTRACTOR WORKFORCE REPORTING REQUIREMENTS

The Contractor/Subcontractor shall submit to the State Resident Engineer assigned to this project, monthly and cumulative workforce information, on reporting forms provided herein. The monthly and cumulative workforce information shall be listed by construction trade category with the percentage of minority and female project hours in each category indicated. Failure to provide this information to the Resident Engineer on a monthly basis will result in suspension of bi-weekly progress payments, or part thereof due under the contract, until such time as the Contractor or Subcontractor demonstrates compliance with these contract terms.

Note: In lieu of using the reporting forms provided herein, the Contractor may use U.S. Department of Labor form CC-257, "Monthly Employment Utilization Report".

VTrans Working to Get You There
Vermont Agency of Transportation

CONTRACTOR MONTHLY EMPLOYMENT UTILIZATION REPORT
Vermont Agency of Transportation
Office of Civil Rights and Labor Compliance

PROJECT NAME AND NUMBER:	CURRENT GOALS	REPORTING PERIOD
	MINORITY:	FROM:
	FEMALE: 6.9%	TO:

CONTRACTOR'S NAME AND ADDRESS: _____

NUMBER OF WORK HOURS OF EMPLOYMENT												PERCENTAGE		NUMBER OF EMPLOYEES			
CONSTRUCTION TRADE CLASSIFICATION	TOTAL NUMBER - ALL WORK HOURS OF EMPLOYEES *BY TRADE*	BLACK (NOT OF HISPANIC ORIGIN)		HISPANIC		ASIAN OR PACIFIC ISLANDERS		AMERICAN INDIAN OR ALASKAN NATIVE		WHITE (NOT OF HISPANIC ORIGIN)		*PERCENTAGE* OF TOTAL WORK HOURS BY MINORITY & FEMALE		TOTAL *NUMBER* OF EMPLOYEES		TOTAL *NUMBER* OF MINORITY EMPLOYEES	
	(BOTH MALE AND FEMALE)	M	F	M	F	M	F	M	F	M	F	MINORITY	FEMALE	M	F	M	F
TOTALS												%	%				

COMPANY OFFICIAL'S SIGNATURE AND TITLE	TELEPHONE NUMBER	DATE SIGNED	PAGE _____ OF _____

INSTRUCTIONS FOR FILING
MONTHLY EMPLOYMENT UTILIZATION REPORT

1. **PROJECT NAME AND NUMBER**
   Complete project name and number as assigned by the Vermont Agency of Transportation.

2. **CONTRACTOR'S NAME AND ADDRESS**
   Indicate the name and address of the *PRIME CONTRACTOR* with a construction contract funded in whole or in part with Federal funds.

3. **CURRENT GOALS**
   See section of contract regarding requirement for Affirmative Action (Executive Order 11246).

4. **REPORTING PERIOD**
   Monthly, beginning with the effective date of the contract.

5. **CONSTRUCTION TRADE CLASSIFICATION**
   Indicate only those classifications used on this contract.

6. **TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE**
   Indicate the total number of hours (male and female *combined*) worked by employees in each trade classification.

7. **BLACK,/HISPANIC/ASIAN/AMERICAN INDIAN/WHITE CATEGORIES**
   Indicate the total number of hours (male and female *separated*) worked by each specified ethnic group of employees in each classification.

8. **PERCENTAGE OF TOTAL WORK HOURS - MINORITY**
   Indicate the PERCENTAGE of total minority work hours (male and female MINORITIES *combined)* of all work hours (the sum of the BLACK, HISPANIC, ASIAN, and AMERICAN INDIAN columns divided by the sum of TOTAL NUMBER OF ALL WORK HOURS - just one figure for each construction trade.)

9. **PERCENTAGE OF TOTAL WORK HOURS - FEMALE**
   Divide the TOTAL NUMBER – **ALL** WORK HOURS OF EMPLOYEES BY TRADE for each classification by the total number of females reported in BLACK, HISPANIC, ASIAN, AMERICAN INDIAN **and WHITE** for each classification.

10. **TOTAL NUMBER OF EMPLOYEES**
    Indicate the total number of male employees and the total number of female employees working in each classification in the contractor's work force during the reporting period.

11. **TOTAL NUMBER OF MINORITY EMPLOYEES**
    Indicate the total number of male *MINORITY* employees and the total number of female *MINORITY (non-white)* employees working in each classification in the contractor's work force during the reporting period.

12. **COMPLETE THE FORM: SIGNATURE, TITLE, PHONE NUMBER, DATE, PAGE ____ OF ____.**

13. **AT THE END OF EACH MONTH, SUBMIT** the completed Monthly Employment Utilization Report Form to the State Resident Engineer on the project site. One of these forms should be completed for each month of the contract.

VTrans Working to Get You There
Vermont Agency of Transportation

CONTRACTOR CUMULATIVE MONTHLY EMPLOYMENT UTILIZATION REPORT
(Include ALL SUBCONTACTORS)

Vermont Agency of Transportation
Office of Civil Rights and Labor Compliance

PROJECT NAME AND NUMBER:	CURRENT GOALS	REPORTING PERIOD
	MINORITY: _____	FROM: _____
	FEMALE: 6.9%	TO: _____

CONTRACTOR'S NAME AND ADDRESS: _____

	NUMBER OF WORK HOURS OF EMPLOYMENT											PERCENTAGE		NUMBER OF EMPLOYEES			
CONSTRUCTION TRADE CLASSIFICATION	TOTAL NUMBER - ALL WORK HOURS OF EMPLOYEES *BY TRADE*	BLACK (NOT OF HISPANIC ORIGIN)		HISPANIC		ASIAN OR PACIFIC ISLANDERS		AMERICAN INDIAN OR ALASKAN NATIVE		WHITE (NOT OF HISPANIC ORIGIN)		*PERCENTAGE* OF TOTAL WORK HOURS BY MINORITY & FEMALE		TOTAL *NUMBER* OF EMPLOYEES		TOTAL *NUMBER* OF MINORITY EMPLOYEES	
	(BOTH MALE AND FEMALE)	M	F	M	F	M	F	M	F	M	F	MINORITY	FEMALE	M	F	M	F
TOTALS												%	%				

COMPANY OFFICIAL'S SIGNATURE AND TITLE	TELEPHONE NUMBER	DATE SIGNED	PAGE _____ OF _____

INSTRUCTIONS FOR FILING
CUMULATIVE MONTHLY EMPLOYMENT UTILIZATION REPORT

*[Using the Monthly Employment Utilization Reports collected from the subcontractors on the job, **COMBINE all the information** to complete the CUMULATIVE Monthly Employment Utilization Report Form and submit to the State Resident Engineer on the project each month.]*

1. **PROJECT NAME AND NUMBER**
   Complete project name and number as assigned by the Vermont Agency of Transportation.

2. **CONTRACTOR'S NAME AND ADDRESS**
   Indicate the name and address of the *PRIME CONTRACTOR* with a construction contract funded in whole or in part with Federal funds.

3. **CURRENT GOALS**
   See section of contract regarding requirement for Affirmative Action (Executive Order 11246).

4. **REPORTING PERIOD**
   Monthly, beginning with the effective date of the contract.

5. **CONSTRUCTION TRADE CLASSIFICATION**
   Indicate only those classifications used on this contract.

6. **TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE**
   Indicate the total number of hours (male and female *combined*) worked by employees in each trade classification.

7. **BLACK,/HISPANIC/ASIAN/AMERICAN INDIAN/WHITE CATEGORIES**
   Indicate the total number of hours (male and female *separated*) worked by each specified ethnic group of employees in each classification.

8. **PERCENTAGE OF TOTAL WORK HOURS - MINORITY**
   Indicate the PERCENTAGE of total minority work hours (male and female MINORITIES *combined)* of all work hours (the sum of the BLACK, HISPANIC, ASIAN, and AMERICAN INDIAN columns divided by the sum of TOTAL NUMBER OF ALL WORK HOURS - just one figure for each construction trade.)

9. **PERCENTAGE OF TOTAL WORK HOURS - FEMALE**
   Divide the TOTAL NUMBER – ALL WORK HOURS OF EMPLOYEES BY TRADE for each classification by the total number of females reported in BLACK, HISPANIC, ASIAN, AMERICAN INDIAN **and WHITE** for each classification.

10. **TOTAL NUMBER OF EMPLOYEES**
    Indicate the total number of male employees and the total number of female employees working in each classification in the contractor's work force during the reporting period.

11. **TOTAL NUMBER OF MINORITY EMPLOYEES**
    Indicate the total number of male *MINORITY* employees and the total number of female *MINORITY (non-white)* employees working in each classification in the contractor's work force during the reporting period.

12. **COMPLETE THE FORM: SIGNATURE, TITLE, PHONE NUMBER, DATE, PAGE ____ OF ____.**

13. **AT THE END OF EACH MONTH, SUBMIT** the completed **CUMULATIVE** Monthly Employment Utilization Report Form to the State Resident Engineer on the project site. One of these forms should be completed for each month of the contract.

WORKERS' COMPENSATION; STATE CONTRACTS COMPLIANCE REQUIREMENT

Vermont Agency of Transportation
Subcontractor Reporting Form

This form must be completed in its entirety by the Contractor and included in all requests to sublet or assign work as outlined in Section 108.01 of the Standard Specifications for Construction.

The Agency of Transportation in accordance with Act 54, Section 32 of the Acts of 2009 and for total projects costs exceeding $250,000.00 requires the contractor to comply with the following provisions and requirements:

The Contractor is required to provide a list of subcontractors on the job along with lists of subcontractor's subcontractors and by whom those subcontractors are insured for workers' compensation purposes. Include additional pages if necessary. This is not a requirement for subcontractor's providing supplies only and no labor to the overall contract or project.

Subcontractor	Insured By		Subcontractor's Sub	Insured By

Date: _____ Project Name & Number: _____

Name of Company: _____ Contact Name: _____

Address: _____ Title: _____

_____ Phone Number: _____

E-mail: _____ Fax Number: _____

By: _____ Name: _____
Signature* (Type or Print)

*Form must be signed by individual authorized to sign on the contractor's behalf.

Rev. 11-01-10

GENERAL SPECIAL PROVISIONS FOR ALL PROJECTS
2011 STANDARD SPECIFICATIONS

SECTION 101 - DEFINITIONS AND TERMS

1. 101.01 ABBREVIATIONS, is hereby modified by adding the following new abbreviation directly after "ABS":

ACL	Advanced Certification List

2. 101.01 ABBREVIATIONS, is hereby further modified by adding the following new abbreviation directly after "ANSI":

APL	Approved Products List

3. 101.01 ABBREVIATIONS, is hereby still further modified by adding the following new abbreviation directly after "CPM":

CPPP	Corrugated Polypropylene Pipe

4. 101.02 DEFINITIONS, HOLIDAYS, is hereby modified by deleting the ninth row in the listing (for "Columbus Day").

5. 101.02 DEFINITIONS, HOLIDAYS, is hereby further modified by adding the following as the twelfth row in the listing (directly after "Thanksgiving Day"):

Day After Thanksgiving	Fourth Friday in November

SECTION 103 - TAXES AND INSURANCE

6. 103.04 INSURANCE REQUIREMENTS, part (e) General Insurance Conditions, is hereby modified by deleting the second paragraph in its entirety.

SECTION 105 - CONTROL OF THE WORK

7. 105.03 PLANS AND WORKING DRAWINGS, part (b) Working Drawings, subpart (4) List of Working Drawings, is hereby modified by deleting the phrase "Roadway, Traffic, and Safety Engineer" and replacing it with the phrase "Project Manager" in the twenty-third row (beginning "641").

8. 105.14 SUNDAY AND HOLIDAY WORK, part (b) Holidays, is hereby corrected by deleting punctuation "," at the end of the paragraph and replacing it with punctuation ".".

9. 105.16 LOAD RESTRICTIONS, part (a) General, is hereby modified by being deleted in its entirety and replaced with the following:

   (a) General. All Contractors, subcontractors, suppliers, or others involved in any project-related activities shall comply with all legal load restrictions specified in Title 23 VSA § 1392 in the hauling of equipment or material on public roads, including that beyond the limits of the project. The application for and possession of any hauling or related permit will not relieve the Contractor or others involved in any project-related activities of any liability that may arise due to any damage resulting from the use or moving of equipment, vehicles, or any other project-related activity.

10. 105.16 LOAD RESTRICTIONS, part (b) Limitations or Use of Equipment and Vehicles, is hereby modified by being deleted in its entirety and replaced with the following:

(b) Limitations on Use of Equipment and Vehicles. Use of equipment and vehicles is subject to the following:

(1) No vehicle or equipment exceeding the load restrictions cited in Title 23 VSA § 1392 will be permitted on any structure as defined by the Engineer.

(2) The operation of any equipment or vehicle of such mass (weight) or any other project-related equipment loaded so as to cause damage to structures, the roadway, or to any other type of active construction will not be permitted, regardless of the limits set forth in Title 23.

(3) Hauling or operation of said vehicles or equipment over any permanent course of any bituminous pavement or any structure during active construction will not be permitted.

(4) No loads of any category will be permitted on a concrete pavement or concrete structure prior to expiration of the curing period and until the concrete reaches its specified 28-day compressive strength.

(5) Notwithstanding those restrictions above, the Contractor shall be responsible for any and all damages incurred to any public roadway as defined in Title 23 due to the use of any equipment or vehicles related to project activities.

11. 105.26 OPENING WASTE, BORROW, AND STAGING AREAS, part (f), is hereby corrected by deleting punctuation "." at the end of the paragraph.

SECTION 108 - PROSECUTION AND PROGRESS

12. 108.09 TEMPORARY SUSPENSION OF THE WORK, part (d) Seasonal Closure, is hereby modified by deleting the phrase "of the Engineer, and only under such conditions as specified therein" and replacing it with the phrase "from the Regional Construction Engineer".

13. 108.09 TEMPORARY SUSPENSION OF THE WORK, part (d) Seasonal Closure, is hereby further modified by adding the following:

Permission will only be granted for work which will result in a direct benefit to the State or the traveling public. Items which may be considered as a benefit include but are not limited to shorter Contract duration, a cost savings, increased safety for the traveling public, and an ability to ensure the quality of work. The Contractor shall request permission in writing, detailing what Contract items may be affected, a schedule of work, and the benefits to the State or traveling public.

14. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (8), is hereby modified by deleting the phrase ", delays in submittals, errors in submittals, and the Contractor's means and methods of construction".

15. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (9), is hereby modified by deleting the phrase ", including but not limited to the Contractor's means and methods of construction".

16. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (11), is hereby modified by being deleted in its entirety.

17. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (13), is hereby modified by adding the following as the first sentence:

    Industry-wide material or supply shortages not reasonably anticipated by the Contractor at the time the Contract was entered.

18. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, subpart (13), is hereby further modified by changing the word "Delay" to the word "Delays" at the beginning of the first sentence.

19. 108.12 FAILURE TO COMPLETE WORK ON TIME, part (c) Liquidated Damages; General; Days Charged, is hereby modified by deleting the DAILY CHARGE FOR LIQUIDATED DAMAGES FOR EACH WORKING DAY OF DELAY table in its entirety and replacing it with a new table as follows:

DAILY CHARGE FOR LIQUIDATED DAMAGES
FOR EACH WORKING DAY OF DELAY

Original Contract Amount		
From More Than ($)	To And Including ($)	Daily Charge Per Day of Delay ($)
0	500,000	1,200.00
500,000	1,000,000	1,300.00
1,000,000	1,500,000	1,400.00
1,500,000	3,000,000	1,800.00
3,000,000	5,000,000	2,300.00
5,000,000	10,000,000	3,500.00
10,000,000	20,000,000	5,900.00
20,000,000+	---------	10,700.00

SECTION 109 - MEASUREMENT AND PAYMENT

20. SECTION 109 - MEASURMENT AND PAYMENT, is hereby corrected by deleting pages 1-141 and 1-142 in their entirety.

SECTION 203 - EXCAVATION AND EMBANKMENTS

21. 203.01 DESCRIPTION, is hereby modified by adding the phrase "performing test borings for the purpose of determining areas of roadway and embankment subsurface voids;" after the phrase "trimming and shaping of slopes;" in the first sentence of the first paragraph.

22. 203.01 DESCRIPTION, is hereby further modified by adding the following new part (l):

(l) Test Borings. Test Borings shall consist of an investigative and planned approach to determining areas of roadway and embankment subsurface voids and repairing bored areas.

23. 203.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

PVC Plastic Pipe.....710.06

24. 203.02 MATERIALS, is hereby further modified by adding the following paragraphs:

Concrete for backfilling subsurface voids shall meet the requirements of Controlled Density (Flowable) Fill of Section 541.

Bituminous concrete pavement shall conform to the requirements of Section 406 or 490, as applicable for the Contract, with the exception that the mix design submittal and plant inspection requirements set forth in Section 406 or 490 will not apply.

25. 203.03 GENERAL CONSTRUCTION REQUIREMENTS, is hereby modified by adding the following as the eighth paragraph:

Prior to the construction of Test Borings and the placement of Controlled Density (Flowable) Fill, the Contractor shall submit to the Engineer site-specific plans, detailing the schedule of work (for these two items), type and location of drilling, sleeve installation, pumping system, confirmatory boring operation, method of filling bore hole (with or without voids being encountered), and repair of the roadway section (sand, gravel, and pavement).

26. 203.11 EMBANKMENTS, is hereby modified by adding the following new part (e):

(e) Test Borings. Test borings shall be performed at the approximate locations indicated in the Plans and/or as directed by the Engineer.

When used adjacent to culverts, test borings shall extend to a depth equal to the bottom of the culvert using casing advanced drilling methods. Alternate drilling equipment that provides a suitably clean, open hole may be submitted to the Engineer for approval.

If void(s) are encountered, Controlled Density (Flowable) Fill shall be placed to completely fill the void(s). Confirmatory borings shall be performed in these locations as directed by the Engineer.

The roadway surface at boring hole locations shall be backfilled and then patched using Bituminous Concrete Pavement.

27. 203.13 METHOD OF MEASUREMENT, is hereby modified by adding the following new part (e):

(e) Test Borings. The quantity of Test Borings to be measured for payment will be the number of meters (linear feet) of test boring performed in the complete and accepted work.

28. 203.14 BASIS OF PAYMENT, is hereby modified by adding the phrase "and Test Borings" after the phrase "Shoulder Berm Removal" in the first sentence of the first paragraph.

29. 203.14 BASIS OF PAYMENT, is hereby further modified by adding the phrase "submitting site-specific plans as required, performing test borings, installing sleeves, backfilling, patching with bituminous concrete pavement," after the phrase "work specified," in the second sentence of the first paragraph.

30. 203.14 BASIS OF PAYMENT, is hereby corrected by adding a period at the end of the sixth paragraph.

31. 203.14 BASIS OF PAYMENT, is hereby still further modified by adding the following paragraph and pay item:

Filling of subsurface voids encountered in performing Test Borings will be paid for under Contract item 541.45.

Payment will be made under:

Pay Item	Pay Unit
203.45 Test Borings	Meter (Linear Foot)

SECTION 310 - RECLAIMED STABILIZED BASE

32. 310.04 CONSTRUCTION, is hereby modified by deleting the phrase "or dust control" after the word "stabilizing" in the third paragraph.

33. 310.04 CONSTRUCTION, is hereby further modified by adding the following sentence to the third paragraph:

When a dust control agent is not exclusively specified on the Plans, water and/or Calcium Chloride shall be used as that agent to meet all requirements of this Section.

34. 310.10 BASIS OF PAYMENT, is hereby modified by adding the following as the fourth paragraph:

Calcium Chloride used for dust control after the reclamation will not be paid for directly, but will be considered incidental to the Reclaimed Stabilized Base item.

SECTION 406 - MARSHALL BITUMINOUS CONCRETE PAVEMENT

35. 406.03 COMPOSITION OF MIXTURE, part (f) Boxed Samples, is hereby corrected by adding the word "Engineer" to the end of the second (last) sentence.

36. 406.16 SURFACE TOLERANCE, is hereby modified by adding the phrase ", with the exception of all limited access highway on and off ramps," after the phrase "miscellaneous mix" in the second (last) sentence of the sixth (last) paragraph.

SECTION 490 - SUPERPAVE BITUMINOUS CONCRETE PAVEMENT

37. 490.14 COMPACTION, part (c) Coring Protocol, is hereby corrected by deleting text "0" and replacing it with text ")" in the first sentence of the seventh paragraph.

38. 490.16 SURFACE TOLERANCE, is hereby modified by adding the phrase ", with the exception of all limited access highway on and off ramps," after the phrase "miscellaneous mix" in the second (last) sentence of the sixth (last) paragraph.

SECTION 501 - HPC STRUCTURAL CONCRETE

39. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (Metric), is hereby modified by deleting the fourth column (with header "Max. Slump (mm)") in its entirety and replacing it with the following:

Max.[7] Slump (mm)

N/A
---

40. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (Metric), is hereby further modified by adding the following footnote:

[7] The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 200 mm, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

41. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby modified by deleting the fourth column (with header "Max. Slump (in)") in its entirety and replacing it with the following:

Max.[7] Slump (mm)

N/A
---

42. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby corrected by deleting text "700 mm" and replacing it with text "28 inches" in footnote 4.

43. 501.03 CLASSIFICATION AND PROPORTIONING, TABLE 501.03A (English), is hereby further modified by adding the following footnote:

[7] The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 8 inches, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

44. 501.03 CLASSIFICATION AND PROPORTIONING, ninth paragraph (beginning "A minimum of thirty (30)…"), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence.

45. 501.11 DEPOSITING CONCRETE UNDERWATER, part (a) General, subpart (1), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence of the second paragraph.

SECTION 505 - PILING

46. 505.09 BASIS OF PAYMENT, is hereby modified by adding the following pay item:

Pay Item	Pay Unit
505.12 Steel Piling, HP 250 x 85 (HP 10 x 57)	Meter (Linear Foot)

SECTION 506 - STRUCTURAL STEEL

47. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby modified by deleting the tenth paragraph (Beginning "Bolts shall be tightened…") in its entirety and replacing it with the following:

Bolts shall be tightened to develop a tension not less than 5 percent in excess of the minimum bolt tension specified in Table 506.19A. Bolts shall not be tightened to more than the maximum tension specified in Table 506.19A.

48. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby further modified by deleting subparts (1) Calibrated Wrench Method, (2) Turn of the Nut Method, and (3) Torque Method in their entirety.

49. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, subpart (4) Tension Control Assembly Method, is hereby modified by being re-designated as part (1).

50. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, subpart (5) Direct Tension Indicator Method, is hereby modified by being re-designated as part (2).

51. 506.19 BOLTING AND CONNECTIONS, part (c) Installation, is hereby still further modified by deleting TABLE 506.19B (including associated paragraphs) in its entirety.

52. 506.19 BOLTING AND CONNECTIONS, part (d) Acceptance of Bolt Tensioning, is hereby modified by deleting the second and third sentences of the first paragraph.

53. 506.19 BOLTING AND CONNECTIONS, part (d) Acceptance of Bolt Tensioning, is hereby further modified by deleting the fourth, fifth, ninth, eleventh, and twelfth paragraphs in their entirety.

SECTION 507 - REINFORCING STEEL

54. 507.01 DESCRIPTION, is hereby modified by adding the phrase "of the level specified" after the phrase "bar reinforcement".

55. 507.01 DESCRIPTION, is hereby further modified by adding the following paragraphs:

Levels and associated types of reinforcing steel are specified as follows:

(a) Level I (Limited Corrosion Resistance). Level I reinforcing includes plain, low alloy, and epoxy coated reinforcing steel.

(b) Level II (Improved Corrosion Resistance). Level II reinforcing includes stainless clad and dual-coated reinforcing steel.

(c) Level III (Exceptional Corrosion Resistance). Level III reinforcing includes solid stainless reinforcing steel.

The location, level, and when specified, type of reinforcing shall be as indicated in the Plans. Reinforcing supplied shall meet the requirements of the level specified or any higher level. Only one type of reinforcing steel shall be used for each level for the Contract work, unless permitted in writing by the Engineer.

56. 507.02 MATERIALS, is hereby modified by deleting the sixth (final) entry in the Subsection listing.

57. 507.03 FABRICATION AND SHIPMENT, part (a) General, is hereby modified by adding the phrase "deformed bar" after the phrase "shall be" in the first paragraph.

58. 507.03 FABRICATION AND SHIPMENT, part (a) General, is hereby corrected by deleting punctuation ".." and replacing it with punctuation "." at the end of the first paragraph.

59. 507.04 PROTECTION OF MATERIAL, is hereby modified by adding the following as the second sentence in the first paragraph:

    When multiple levels of reinforcing steel are used on a project, they shall be stored separately, including during transport in order that there is no direct contact between the bars.

60. 507.04 PROTECTION OF MATERIAL, is hereby further modified by deleting the phrase "The epoxy coating" and replacing it with the word "Coatings" in the third sentence of the third paragraph.

61. 507.04 PROTECTION OF MATERIAL, is hereby still further modified by deleting the phrase "as required for damaged areas" and replacing it with the phrase "per the coating manufacturer's recommendations and to the satisfaction of the Engineer" in the third sentence of the fifth (last) paragraph.

62. 507.04 PROTECTION OF MATERIAL, is hereby still further modified by adding the following paragraph:

    Ends of Level II reinforcing steel where the mild steel is exposed shall be repaired in the following manner:

    (a) Cut ends of dual-coated reinforcing steel shall be coated with a two-part epoxy patching material as specified by the coating manufacturer. The materials and procedures shall be approved by the Engineer prior to the repairs being performed.

    (b) Cut ends of stainless clad reinforcing steel shall be epoxied and capped in accordance with the manufacturer's recommendations with either stainless steel caps or plastic caps. Caps shall be sealed to prevent the intrusion of moisture.

63. 507.05 PLACING AND FASTENING REINFORCING STEEL, is hereby modified by deleting the sixth paragraph in its entirety and replacing it with the following:

    Tie wires and supports used for installation of reinforcement shall be composed of the same material as any steel being contacted or shall be plastic. When forms are to be removed in their entirety, uncoated steel chairs equipped with snug-fitting, high-density, polyethylene tips which provide 3 mm (1/4 inch) clearance between the metal and any exposed surface may be used.

64. 507.10 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase ", Epoxy Coated Reinforcing Steel, and Galvanized Reinforcing Steel" and replacing it with the phrase "of the type and size specified" in the first paragraph.

65. 507.10 METHOD OF MEASUREMENT, is hereby further modified by adding the phrase "of the type specified" at the end of the second paragraph (beginning "The quantity of Drilling and Grouting Dowels…").

66. 507.11 BASIS OF PAYMENT, is hereby modified by deleting the following pay items:

Pay Item	Pay Unit
507.15 Reinforcing Steel	Kilogram (Pound)
507.17 Epoxy Coated Reinforcing Steel	Kilogram (Pound)
507.18 Galvanized Reinforcing Steel	Kilogram (Pound)

67. 507.11 BASIS OF PAYMENT, is hereby further modified by adding the following pay items:

Pay Item	Pay Unit
507.11 Reinforcing Steel, Level I	Kilogram (Pound)
507.12 Reinforcing Steel, Level II	Kilogram (Pound)
507.13 Reinforcing Steel, Level III	Kilogram (Pound)

SECTION 516 - EXPANSION DEVICES

68. 516.01 DESCRIPTION, is hereby modified by adding the phrase ", or partially removing and modifying," after the word "installing".

69. 516.05A PARTIAL REMOVAL AND MODIFICATION, is hereby made a new Subsection of the Standard Specifications as follows:

516.05A PARTIAL REMOVAL AND MODIFICATION. The Contractor shall partially remove and modify the existing bridge joint at the locations indicated in the Plans and as directed by the Engineer.

Steel for new joint plates shall meet the requirements of Subsection 714.02.

The Contractor shall remove and dispose of existing joint plates, drain troughs, and associated hardware.

The Contractor shall grind existing steel plates and/or shoulder concrete to the configuration shown on the Plans. The final surface shall be to the satisfaction of the Engineer.

70. 516.06 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Partial Removal and Modification of Bridge Joint to be measured for payment will be the number of meters (linear feet) of bridge joint removed and modified in the complete and accepted work, measured along its centerline.

71. 516.07 BASIS OF PAYMENT, is hereby modified by adding the following paragraph and pay item:

The accepted quantity of Partial Removal and Modification of Bridge Joint will be paid for at the Contract unit price per meter (linear foot). Payment will be full compensation for partially removing and modifying the existing joint as specified and as detailed in the Plans, and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
516.20 Partial Removal and Modification of Bridge Joint	Meter (Linear Foot)

SECTION 525 - BRIDGE RAILINGS

72. 525.02 MATERIALS, is hereby modified by adding the following as the third entry in the Subsection listing:

Structural Steel.....714.02

73. 525.06 INSTALLATION, part (a) General, is hereby modified by adding the following as the sixth (last) paragraph:

Concrete railing shall receive an aesthetic finish in accordance with Subsection 501.16. Cracks in concrete railing shall be repaired by a method approved by the Engineer. Cracks in concrete greater than 0.25 mm (0.01 inch) may be cause for rejection.

74. 525.08 BASIS OF PAYMENT, is hereby modified by adding the phrase "for furnishing all forms, joint filler, admixtures, trial batches, and connection plates for approach railing terminal connectors; for satisfactory completion of any necessary repairs, surface finishing, and curing;" after the phrase "for all work necessary for verifying and adjusting post height and/or bolt spacing of existing posts;" in the second (last) sentence of the third paragraph.

75. 525.08 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Pay Item	Pay Unit
525.45 Bridge Railing, Galvanized Steel Tubing/ Concrete Combination	Meter (Linear Foot)

SECTION 531 - BRIDGE BEARING DEVICES

76. 531.04 FABRICATION, part (b) Surface Protection, is hereby corrected by deleting punctuation ",." at the end of the paragraph and replacing it with punctuation ".".

SECTION 540 - PRECAST CONCRETE

77. 540.02 MATERIALS, is hereby modified by deleting the fourteenth entry (beginning "Coated Bar Reinforcement…") in the Subsection listing.

78. 540.02 MATERIALS, is hereby further modified by adding the following as the twenty-ninth entry in the Subsection listing:

Sheet Membrane Waterproofing, Preformed Sheet……726.11

79. 540.07 FABRICATION, part (e) Placing Concrete, is hereby modified by deleting the phrase "done with care" and replacing it with the phrase "performed in accordance with Subsection 501.10(f)" in the third (last) sentence.

80. 540.10 INSTALLATION, is hereby modified by adding the following new part (c):

(c) Sheet Membrane Waterproofing. A reinforced asphalt, synthetic resin, or coal-tar based preformed sheet membrane shall be placed over the joints of precast concrete units in accordance with the Contract Documents. All work performed shall be in accordance with the manufacturer's recommendations.

Material for membrane shall meet the requirements of Subsection 726.11.

Waterproofing shall not be performed in wet weather or when the temperature is below 5°C (40°F), without the authorization of the Engineer.

The concrete surfaces that are to be waterproofed shall be reasonably smooth and free from projections or holes and shall be cleaned of dust and loose material. The surfaces shall be visibly dry prior to and during application of the membrane system.

81. 540.14 BASIS OF PAYMENT, is hereby modified by adding the following paragraph:

Furnishing and placing preformed sheet membrane waterproofing, including primer, mastic, polyurethane membrane sealant, and surface preparation, is considered incidental to the work for Precast Concrete Structure.

SECTION 541 - STRUCTURAL CONCRETE

82. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby modified by deleting footnote designation "*" in the first and fourth entries of the third row (for "Class A" concrete).

83. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby further modified by deleting footnote "*" and associated text (beginning "* When this class of concrete…").

84. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby still further modified by deleting the fourth (with header "Range in Slump (mm)") and fifth (with header "Air Cont. (%)") columns in their entirety and replacing them with the following:

Range* in Slump (mm)	Air Content (%)
---	7.0 ± 1.5
---	7.0 ± 1.5
---	7.0 ± 1.5
---	5.5 ± 1.5
---	5.5 ± 1.5
---	7.0 ± 1.5

85. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric), is hereby still further modified by adding the following footnote:

* The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 200 mm, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

86. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (Metric) is hereby still further modified by adding the following as the eighth (bottom) row with the included footnotes:

Controlled Density (Flowable) Fill	To be designed ***	To be designed ****	To be designed *****	10 min.	704.01 (Fine Aggregate)	0.85 max. ******	---

*** A mineral admixture may be used to replace a portion of the cement.

**** The minimum amount of water shall be used to produce the desirable flow for the intended use without showing segregation.

***** The slump (flowability) shall be such that material is able to completely fill the voids or area as needed without segregation.

******A minimum of 3 cylinders per test age required to constitute a test. If average strength at 28 days exceeds 115% of max. strength, then payment for Contract item 541.45 will be 85% of the Contract bid price.

87. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby modified by deleting footnote designation "*" in the first and fourth entries of the third row (for "Class A" concrete).

88. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby further modified by deleting footnote "*" and associated text (beginning "* When this class of concrete…").

89. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby still further modified by deleting the fourth (with header "Range in Slump (in.)") and fifth (with header "Air Cont. (%)") columns in their entirety and replacing them with the following:

Range* in Slump (mm)	Air Content (%)
---	7.0 ± 1.5
---	7.0 ± 1.5
---	7.0 ± 1.5
---	5.5 ± 1.5
---	5.5 ± 1.5
---	7.0 ± 1.5

90. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English), is hereby still further modified by adding the following footnote:

* The mix shall not exhibit segregation at the slump/spread used at placement. If the Engineer suspects there is segregation, the Engineer will require a slump/spread test be performed by the Contractor to visually observe the characteristics of the mix. If in the opinion of the Engineer the mix does exhibit segregation, the load will be rejected and subsequent load(s) shall be tested, at a minimum of 3 loads or until the problem is corrected.

If the Contractor needs a concrete with a slump greater than 8 inches, the Contractor shall propose to the Engineer to use an SCC mix, which shall be submitted to the Engineer for review and acceptance.

91. 541.03 CLASSIFICATION AND PROPORTIONING, TABLE 541.03A (English) is hereby modified by adding the following as the eighth (bottom) row with the included footnotes:

Controlled Density (Flowable) Fill	To be designed ***	To be designed ****	To be designed *****	10 min.	704.01 (Fine Aggregate)	125 max. ******	---

*** A mineral admixture may be used to replace a portion of the cement.

**** The minimum amount of water shall be used to produce the desirable flow for the intended use without showing segregation.

***** The slump (flowability) shall be such that material is able to completely fill the voids or area as needed without segregation.

******A minimum of 3 cylinders per test age required to constitute a test. If average strength at 28 days exceeds 115% of max. strength, then payment for Contract item 541.45 will be 85% of the Contract bid price.

92. 541.10 PLACING CONCRETE, part (c) Placement Limitations, is hereby modified by adding the following paragraphs:

Flowable fill shall be applied to voids and other locations as specified in the Contract Documents and as directed by the Engineer. Flowable fill shall be able to completely fill the existing voids.

If voids are discovered, the Engineer may direct the Contractor to submit a plan for filling the remaining voids. This work, including preparing and submitting the plan and filling any remaining voids, will be at the Contractor's expense.

93. 541.11 DEPOSITING CONCRETE UNDERWATER, part (a) General, subpart (1), is hereby corrected by deleting the phrase "1716 Barre-Montpelier Rd., Berlin, Vermont 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the second sentence of the second paragraph.

94. 541.19 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase "or LW" and replacing it with the phrase "LW, or Flowable Fill" in the first sentence of the first paragraph.

95. 541.20 BASIS OF PAYMENT, is hereby modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
541.45 Controlled Density (Flowable) Fill	Cubic Meter (Cubic Yard)

SECTION 580 - STRUCTURAL CONCRETE REPAIR

96. 580.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

Polymer Concrete Repair Material.....780.05

97. 580.03 PROPORTIONING AND MIXING, is hereby modified by deleting the last sentence of the first paragraph in its entirety and replacing it with the following:

The product shall not be extended with sand or gravel, except for Rapid Setting Concrete Repair Material with Coarse Aggregate and Polymer Concrete Repair Material when mixed with approved aggregates in conformance with the manufacturer's recommendations.

98. 580.04 SURFACE PREPARATION FOR REPAIRS, OVERLAYS AND MEMBRANES, is hereby modified by adding the word "abrasive" after the phrase "shall be" and before the phrase "blast cleaned" in the first sentence of the third paragraph.

99. 580.04 SURFACE PREPARATION FOR REPAIRS, OVERLAYS AND MEMBRANES, is hereby further modified by adding the phrase ", or Polymer Concrete Repair Material," after the word "Aggregate" in the sixth paragraph.

100. 580.08 METHOD OF MEASUREMENT, is hereby modified by deleting the phrase "and not for new patches, which will be the responsibility of the Contractor" and replacing it with the phrase ", with no deductions made for areas of new patches" in the second sentence of the ninth paragraph.

101. 580.08 METHOD OF MEASUREMENT, is hereby further modified by adding the phrase ", and Polymer Concrete Repair Material" after the word "Aggregate" in the first sentence of the tenth paragraph.

102. 580.09 BASIS OF PAYMENT, is hereby modified by adding the phrase ", and Polymer Concrete Repair Material" after the word "Aggregate" in the seventh paragraph.

103. 580.09 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
580.21 Polymer Concrete Repair Material	Cubic Meter (Cubic Yard)

SECTION 601 - CULVERTS AND STORM DRAINS

104. 601.02 MATERIALS, is hereby modified by adding the following as the sixth entry in the Subsection listing:

Corrugated Polypropylene Pipe.....710.07

105. 601.07 JOINING PIPE, is hereby modified by adding the following new part (d) as follows:

(d) Corrugated Polypropylene Pipe. Corrugated Polypropylene pipe shall be joined by a system designed and approved by the pipe manufacturer. Couplings and fittings shall provide sufficient longitudinal strength to preserve pipe alignment and prevent separation at the joints.

106. 601.11 BASIS OF PAYMENT, is hereby modified by changing the end of the pay item number range for CPEP Elbow from 601.5999 to 601.5899.

107. 601.11 BASIS OF PAYMENT, is hereby further modified by adding the following pay items:

Payment will be made under:

Pay Item	Pay Unit
601.2800 to 601.2999 CPPP(SL)	Meter (Linear Foot)
601.5900 to 601.5999 CPPP Elbow	Each
601.7100 to 601.7199 CPPPES	Each

SECTION 608 - EQUIPMENT RENTAL

108. 608.02 GENERAL REQUIREMENTS, is hereby modified by adding the following new part (i):

(i) Truck-Mounted Attenuator, Advanced Warning Vehicle/Protection Vehicle (AWV/PV). Truck-Mounted Attenuator, AWV/PV shall consist of a Truck-Mounted Attenuator meeting the requirements of Subsection 608.02(h) and be equipped with a Changeable Message Sign in accordance with the MUTCD. The Changeable Message Sign shall be mounted so as to be clearly visible to the traveling public and shall be capable of being controlled from inside the cab of the vehicle, with capable controls including but not limited to turning the sign on and off, changing between preset messages, and inserting new messages when approved by the Engineer. Phases of signing shall have the ability to change automatically when required.

109. 608.04 BASIS OF PAYMENT, is hereby modified by changing the word "item" to "items" and by adding the phrase "and Truck-Mounted Attenuator, AWV/PV" after the phrase "Truck-Mounted Attenuator" in the second (last) paragraph.

110. 608.04 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
608.50 Truck-Mounted Attenuator, AWV/PV	Hour

SECTION 613 - STONE FILL, RIPRAP, AND SLOPE PAVING

111. 613.02 MATERIALS, is hereby modified by adding the following to the Subsection listing:

Rock Fill for Gabions.....706.06
Gabion Baskets.....712.04

112. 613.04 PLACING, is hereby modified by adding the following new part (d):

(d) Rock Fill for Gabions. The furnishing and installing of gabion baskets shall be performed in accordance with the manufacturer's recommendations.

The Contractor should expect to perform some manual stone placement to minimize voids and to create a neat, flat vertical surface of gabions.

113. 613.05 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Gabion Wall to be measured for payment will be the number of cubic meters (cubic yards) of Rock Fill for Gabions placed in the complete and accepted work.

114. 613.06 BASIS OF PAYMENT, is hereby modified by adding the phrase "and Gabion Wall" after the word "specified" in the first sentence of the first paragraph.

115. 613.06 BASIS OF PAYMENT, is hereby modified by adding the phrase ", including gabion baskets," after the word "material" in the third (last) sentence of the first paragraph.

116. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the phrase "or rock" after the word "stone" in the first sentence of the second paragraph.

117. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the following paragraph:

Geotextile fabric and bedding material for Gabion Wall will be paid for under the appropriate Contract items.

118. 613.06 BASIS OF PAYMENT, is hereby still further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
613.25 Gabion Wall	Cubic Meter (Cubic Yard)

SECTION 616 – CURBS AND GUTTERS

119. 616.05 REPOINTING GRANITE BRIDGE CURB, is hereby made a new Subsection of the Standard Specifications as follows:

616.05 REPOINTING GRANITE BRIDGE CURB. The existing mortar bed and vertical curb joints shall be repointed as shown on the Plans. Mortar shall meet the requirements of Subsection 707.01.

120. 616.14 METHOD OF MEASUREMENT, is hereby modified by adding the following as the second paragraph:

The quantity of Repointing Granite Bridge Curb to be measured for payment will be the number of liters (gallons) of mortar applied in the completed and accepted work, measured to the nearest liter (gallon).

121. 616.14 METHOD OF MEASUREMENT, is hereby corrected by changing the word "portland" to "Portland" in the fifth (last) paragraph.

122. 616.15 BASIS OF PAYMENT, is hereby modified by adding the following as the second paragraph:

The accepted quantity of Repointing Granite Bridge Curb will be paid for at the Contract unit price per liter (gallon). Payment will be full compensation for furnishing, transporting, handling, and placing the material specified and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

123. 616.15 BASIS OF PAYMENT, is hereby corrected by changing the word "portland" to "Portland" in the fourth paragraph.

124. 616.15 BASIS OF PAYMENT, is hereby further modified by adding the following pay item:

Payment will be made under:

Pay Item	Pay Unit
616.225 Repointing Granite Bridge Curb	Liter (Gallon)

SECTION 621 - TRAFFIC BARRIERS

125. 621.01 DESCRIPTION, is hereby modified by adding the phrase "repairing," after the phrase "removing,".

126. 621.02 MATERIALS, is hereby modified by adding the following as the fifth entry in the Subsection listing:

Wire Rope or Cable.....713.03

127. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby modified by deleting the phrase "post assemblies and panel units" and replacing it with the phrase "guardrail components" in the second sentence of the first paragraph.

128. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby further modified by deleting the first sentence of the second paragraph in its entirety and replacing it with the following:

Those sections in which height over an extensive portion of the section is greater than 760 mm (30 inches) or less than 675 mm (26 ½ inches) shall be adjusted to a nominal height of 735 mm ±25 mm (29 inches ± 1 inch).

129. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GUARDRAIL OR GUIDE POSTS, is hereby still further modified by deleting the phrase "post assembly replacement or guardrail beam replacement occur" and replacing it with the phrase "guardrail component replacement occurs" in the fourth paragraph.

130. 621.13 REPLACEMENT, ADJUSTMENT, REMOVAL, AND DISPOSAL OF GURADRAIL OR GUIDE POSTS, is hereby still further modified by adding the following as the sixth and seventh paragraphs:

Offset blocks designated for replacement shall be replaced in-kind. Materials shall be in conformance with the applicable requirements of Subsection 728.01 for either wood, steel, or alternative blockouts.

Cable guardrail repair shall be performed in accordance with VTrans Standard Drawing G-6 and as directed by the Engineer.

131. 621.14 METHOD OF MEASUREMENT, is hereby modified by adding the following as the fourth and fifth paragraphs of the Subsection text:

The quantities of Cable Guardrail J-Bolt, Galvanized and Cable Guardrail Splice Unit to be measured for payment will be the number of units installed in the complete and accepted work.

The quantity of Replacement of Guardrail Cable to be measured for payment will be the number of meters (linear feet) installed in the complete and accepted work.

132. 621.14 METHOD OF MEASUREMENT, is hereby further modified by adding the following as the sixth paragraph of the Subsection text:

The quantities of Steel Beam Guardrail Delineator and Steel Beam Guardrail Offset Block to be measured for payment will be the number of each component replaced in the complete and accepted work.

133. 621.15 BASIS OF PAYMENT, is hereby modified by adding the following as the second, third, and fourth paragraphs of the Subsection text:

The accepted quantities of Cable Guardrail J-Bolt, Galvanized and Cable Guardrail Splice Unit will be paid for at the Contract unit price for each.

The accepted quantity of Replacement of Cable Guardrail will be paid for at the Contract unit price per meter (linear foot).

The accepted quantities of Steel Beam Guardrail Delineator and Steel Beam Guardrail Offset Block will be paid for at the Contract unit price for each.

134. 621.15 BASIS OF PAYMENT, is hereby further modified by adding the phrase "removing and disposing of damaged guardrail component(s)," after the phrase "specified," in the first sentence of the seventh paragraph.

135. 621.15 BASIS OF PAYMENT, is hereby still further modified by adding the following pay items:

Payment will be made under:

Pay Item		Pay Unit
621.173	Cable Guardrail J-Bolt, Galvanized	Each
621.174	Cable Guardrail Splice Unit	Each
621.175	Replacement of Guardrail Cable	Meter (Linear Foot)
621.218	Steel Beam Guardrail Delineator	Each
621.219	Steel Beam Guardrail Offset Block	Each
621.70	Guardrail Approach Section, Galvanized Type I	Each
621.71	Guardrail Approach Section, Galvanized Type II	Each
621.726	Guardrail Approach Section, Galvanized 3 Rail Box Beam w/Curb	Each
621.735	Guardrail Approach Section, Steel Beam	Each
621.736	Guardrail Approach Section, Steel Beam w/2.4 m (8 feet) Posts	Each
621.737	Guardrail Approach Section, Galvanized HD Steel Beam	Each
621.738	Guardrail Approach Section, Galvanized HD Steel Beam w/2.4 m (8 feet) Posts	Each
621.748	Guardrail Approach Section to Concrete Combination Bridge Railing, TL-3	Each

SECTION 630 – UNIFORMED TRAFFIC OFFICERS AND FLAGGERS

136. 630.03 CLOTHING AND EQUIPMENT, part (b) For Flaggers, subpart (1), is hereby modified by replacing the phrase "ANSI 107-1999" with the phrase "ANSI 107-2004" in the first sentence.

137. 630.03 CLOTHING AND EQUIPMENT, part (d) For All Traffic Control Personnel, subpart (2), is hereby modified by deleting the word "The" and replacing it with the phrase "When deemed necessary by the Engineer, or when noted in the Plans, the" at the beginning of the first sentence.

SECTION 641 - TRAFFIC CONTROL

138. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby modified by adding the phrase "implement that plan or" after the phrase "the Contractor may" in the first sentence of the fourth paragraph.

139. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby further modified by adding the following as the second sentence of the fourth paragraph:

When the Contractor will implement an Agency-designed traffic control plan, written certification shall be submitted to the Engineer indicating that traffic control will be performed in accordance with the Agency design.

140. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby still further modified by changing the word "This" to the word "An" in the second sentence of the fourth paragraph.

141. 641.02 GENERAL CONSTRUCTION REQUIREMENTS, is hereby still further modified by adding the following paragraph:

When the Contract Documents specify that a site-specific traffic control plan be submitted by the Contractor, Construction Drawings shall be submitted in accordance with Section 105. The submitted site-specific plan shall include, for each phase of construction requiring a significant change in temporary traffic control, a narrative description of the proposed temporary traffic control for each phase (including pedestrian accommodations where appropriate) and the major work activities to be completed in each phase; and a layout for each phase of construction showing existing lane configurations, existing traffic control devices (signs, signals, and pavement markings), driveways, ramps, and highway intersections, and the location of all proposed temporary traffic control devices, flaggers, and UTO's. All pertinent dimensions, such as taper lengths, sign spacing, temporary lane widths, and distance(s) from existing traffic control devices shall be labeled.

142. 641.03 TRAFFIC CONTROL DEVICES, is hereby modified by deleting the phrase "have three (3) lines of eight (8) characters per line and conform to Section 6F.55 of the MUTCD" and replacing it with the phrase "be used with a maximum of two phases, each consisting of a maximum of 3 lines of 8 characters" in the sixth paragraph.

143. 641.03 TRAFFIC CONTROL DEVICES, is hereby further modified by deleting the phrase "requirements in Section 6F.56 of" and replacing it with the phrase "Portable Arrow Board requirements in" in the seventh paragraph.

SECTION 646 - RETROREFLECTIVE PAVEMENT MARKINGS

144. 646.02 MATERIALS, is hereby modified by deleting the Subsection listing in its entirety and replacing it with the following:

Polyurea Pavement Markings.....708.08(a)
Low VOC Chlorinated Rubber Traffic Paint.....708.08(b)
Low VOC Acetone Based Traffic Paint.....708.08(b)
Epoxy Paint.....708.08(c)
Waterborne Traffic Paint.....708.08(d)
Methyl-methacrylate Paint.....708.08(e)
Glass Beads.....708.09(a)
Premium Optics.....708.09(b)
Wet Recoverable and Wet Reflective Optics.....708.09(c)
Thermoplastic Pavement Markings, Type A.....708.10(a)
Thermoplastic Pavement Markings, Type B.....708.10(b)
Raised Pavement Markers, Type I.....708.11
Pavement Marking Tape, Type A.....708.12(a)
Pavement Marking Tape, Type B.....708.12(b)
Pavement Marking Tape, Type C.....708.12(c)
Pavement Marking Tape, Type D.....708.12(d)
Line Striping Targets.....708.13(a)
Raised Pavement Markers, Type II.....708.13(b)

Temporary Pavement Marking Tape.....708.13(c)
Pavement Marking Mask.....708.13(d)

145. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby modified by deleting the first paragraph in its entirety.

146. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby further modified by deleting the seventh paragraph in its entirety.

147. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by deleting the word "interim" and replacing it with the phrase "permanent or temporary" in the first sentence of the eighth paragraph.

148. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by adding the phrase "edgeline," after the phrase "centerlines," in the first sentence of the eighth paragraph.

149. 646.04 APPLICATION OF MARKINGS, GENERAL, part (a) Placement of Markings, is hereby still further modified by deleting the ninth paragraph in its entirety.

150. 646.04 APPLICATION OF MARKINGS, GENERAL, part (c) Weather Limitations, subpart (2), is hereby modified by being deleted in its entirety and replaced as follows:

(2) At the time of application of durable pavement markings, the pavement surface and ambient air temperatures shall be as per the manufacturer's published specified application temperatures, and the dew point shall be 5°F or more below the ambient air temperature. If the manufacturer's published recommendations are unavailable, the pavement surface and ambient air temperatures shall be a minimum of 10°C (50°F).

151. 646.04 APPLICATION OF MARKINGS, GENERAL, part (c) Weather Limitations, subpart (3), is hereby modified by being the word "October" and replacing it with the word "November".

152. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (1) Centerline Markings, is hereby modified by deleting the number "100" and replacing it with the phrase "the same width as the lines" in the fourth sentence of the first paragraph.

153. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (1) Centerline Markings, is hereby further modified by deleting the second (last) paragraph in its entirety.

154. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (2) Edgeline Markings, is hereby modified by deleting the second (last) paragraph in its entirety.

155. 646.04 APPLICATION OF MARKINGS, GENERAL, part (d) Layout and Control, subpart (3) Dotted Line, is hereby modified by deleting the second (last) paragraph in its entirety.

156. 646.06 PAINT PAVEMENT MARKINGS, is hereby modified by being re-named WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS.

157. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby modified by changing the word "Retroflective" to "Retroreflective" in the first sentence of the first paragraph.

158. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby further modified by deleting the phrase "shall have a dry film thickness of 380 ±25 µm (15 ±1 mil) for paint, unless otherwise specified, and" in the third (last) sentence of the first paragraph.

159. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby still further modified by adding the following as the third paragraph:

The markings shall be applied at a rate to create a uniform wet film thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon) with glass beads applied at a rate of 960 grams per liter (8.0 lb per gallon) of paint. The Contractor shall provide the Engineer and the Materials Section with the optic drop on rates of all optic materials and daily binder application rates.

160. 646.06 WATERBORNE AND LOW VOC CHLORINATED RUBBER AND ACETONE BASED PAINT PAVEMENT MARKINGS, is hereby still further modified by deleting the fourth and fifth (last) paragraphs in their entirety.

161. 646.07 DURABLE PAVEMENT MARKINGS, is hereby modified by adding the following as the third sentence of the first paragraph:

Durable pavement markings shall be installed within two weeks of the placement of the wearing course.

162. 646.07 DURABLE PAVEMENT MARKINGS, is hereby further modified by changing punctuation at the end of the third sentence of the first paragraph from ":" to ".".

163. 646.07 DURABLE PAVEMENT MARKINGS, is hereby still further modified by adding the following at the end of the first paragraph:

The Contractor shall select optics that conform with Subsections 708.09(a), 708.09(b), and 708.09(c). The Contractor shall provide the Engineer and the Materials Section with the daily optic drop on rates of all optic materials and daily binder application rates. The Contractor shall perform all quality control activities and provide to the Engineer on a daily basis all retroreflectivity measurements collected. The Agency will perform all acceptance testing activities. The Engineer will select an evaluation section(s) for the purpose of collecting pavement marking retroreflectivity measurements. Retroreflectivity measurements shall be performed in accordance with ASTM D7585, as modified by Table 646.07A.

TABLE 646.07A – EVALUATION SECTION CRITERIA

PAVEMENT MARKING TYPE	EVALUATION SECTION(S) REQUIRED*	EVALUATION SECTION LENGTH m (feet)	MEASUREMENTS REQUIRED
Long Lines	1 per 3.2 km (2 miles)	120 (400)	20
Dashed Lines	1 per 3.2 km (2 miles)	120 (400)	20 (2 per dashed line)

*Projects less than 3.2 km (2 miles) in length shall have a minimum of one (1) evaluation section.

Each spot measurement for all yellow centerline retroreflectivity shall be performed in both directions at each spot location and averaged for acceptance. For long lines and dashed lines, if the average retroreflectivity as determined in accordance with ASTM D7585 fails to meet the minimum retroreflectivity requirements, or if 25% of the individual tests fail to meet the minimum retroreflectivity requirements, the entire length represented by the evaluation section shall be re-marked and re-tested until in compliance, at no additional cost to the Agency.

164. 646.07 DURABLE PAVEMENT MARKINGS, part (a) Pavement Marking Tape, Type I, is hereby modified by being deleted in its entirety and replaced as follows:

(a) Pavement Marking Tape, Type A. Type A tape for pavement markings is classified as high performance or high durable, and non-removable. Type A tape shall conform to the requirements of Subsection 708.12(a).

Type A tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

165. 646.07 DURABLE PAVEMENT MARKINGS, part (b) Epoxy Paint, is hereby modified by being re-designated as part (e).

166. 646.07 DURABLE PAVEMENT MARKINGS, part (c) Thermoplastic, is hereby modified by being re-designated as part (f) Extruded Thermoplastic.

167. 646.07 DURABLE PAVEMENT MARKINGS, part (d) Polyurea Paint, is hereby modified by being re-designated as part (h).

168. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Methyl-methacrylate Paint, is hereby modified by being re-designated as part (i).

169. 646.07 DURABLE PAVEMENT MARKINGS, is hereby further modified by adding the following new parts (b), (c), and (d):

(b) Pavement Marking Tape, Type B. Type B tape for pavement markings is classified as non-removable, used in long line applications. Type B tape shall conform to the requirements of Subsection 708.12(b).

Type B tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

(c) Pavement Marking Tape, Type C. Type C tape for pavement markings is classified as non-removable, used in intersection applications. Type C tape shall conform to the requirements of Subsection 708.12(c).

Type C tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements.

(d) Pavement Marking Tape, Type D. Type D tape for pavement markings is classified as non-removable, used for symbols and legends applications. Type D tape shall conform to the requirements of Subsection 708.12(d).

Type D tapes, when used as a final durable marking, shall be applied only by being inlaid in the bituminous pavement during the rolling operation or in a recess as defined in Subsection 646.09, and shall be applied in accordance with the manufacturer's requirements. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

170. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Epoxy Paint, is hereby modified by deleting the fifth (last) sentence in its entirety.

171. 646.07 DURABLE PAVEMENT MARKINGS, part (e) Epoxy Paint, is hereby further modified by adding the following sentences:

Epoxy paint shall be applied at a rate to create a uniform wet film in place thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon). Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

172. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, is hereby modified by replacing the phrase "708.10" with the phrase "708.10(a)" at the end of the first paragraph.

173. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, is hereby further modified by adding the following as the third paragraph:

Thermoplastic markings shall be applied at a rate to create a uniform hot film in place thickness of 2667 µm (105 mils) with an allowable range of ± 127 µm (±5 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 0.36 square meters per liter (15 square feet per gallon).

174. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (1) Thermoplastic Application Equipment, a. Mobile Applicator Equipment, is hereby modified by deleting the phrase ", between 2.4 and 2.5 mm (96 and 100 mils) thick" and replacing it with the phrase "with a uniform hot film in place thickness of 2667 µm (105 mils), with an allowable range of ± 127 µm (±5 mils)" in the second sentence of the second paragraph.

175. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (1) Thermoplastic Application Equipment, b. Portable Applicator Equipment, is hereby modified by deleting the phrase "between 2 and 2.5 mm (80 and 100 mils) thick" and replacing it with the phrase "with a uniform hot film in place thickness of 2667 µm (105 mils) with an allowable range of ± 127 µm (±5 mils)" in the fourth sentence.

176. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, b. Thermoplastic Composition, is hereby modified by replacing the phrase "708.10" with the phrase "708.10(a)".

177. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, d. Extruded Markings, is hereby modified by deleting the phrase "thickness between 2.4 and 2.5 mm (96 and 100 mils)" and replacing it with the phrase "uniform hot film in place thickness between 2.54 and 2.794 mm (100 and 110 mils)".

178. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Beads, is hereby modified by being re-named Optics.

179. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby modified by adding the phrase "shall be" after the phrase "Type I".

180. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby further modified by adding the phrase "intermix of the" after the phrase "incorporated into the".

181. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 1., is hereby still further modified by deleting the numbers "28" and "30" and replacing them with the numbers "30" and "40", respectively.

182. 646.07 DURABLE PAVEMENT MARKINGS, part (f) Extruded Thermoplastic, subpart (2) Application Requirements, e. Optics, subpart 2., is hereby modified by being deleted in its entirety and replaced as follows:

> 2. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

183. 646.07 DURABLE PAVEMENT MARKINGS, is hereby still further modified by adding the following new part (g):

(g) Preformed Thermoplastic. Approved preformed thermoplastic marking materials shall be one of the preformed thermoplastic markings listed on the Approved Products List on file with the Agency's Research and Development Section under Subsection 708.10(b).

184. 646.07 DURABLE PAVEMENT MARKINGS, part (h) Polyurea Paint, is hereby modified by deleting the second sentence in its entirety.

185. 646.07 DURABLE PAVEMENT MARKINGS, part (h) Polyurea Paint, is hereby further modified by adding the following sentences:

Polyurea paint shall be applied at a rate to create a uniform wet film in place thickness of 558.8 µm (22 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.7 square meters per liter (70 square feet per gallon). Initial dry retroreflectivity minimums for surface-applied polyurea shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings. Initial dry retroreflectivity minimums for recessed polyurea shall be 600 mcdl/lx/m^2 for yellow markings and 800 mcdl/lx/m^2 for white markings.

186. 646.07 DURABLE PAVEMENT MARKINGS, part (i) Methyl-methacrylate Paint, is hereby modified by deleting the second sentence in its entirety.

187. 646.07 DURABLE PAVEMENT MARKINGS, part (i) Methyl-methacrylate Paint, is hereby further modified by adding new subpart (1) as follows:

(1) Application Requirements.

a. Spray Applied Markings. All spray applied markings shall be applied at a rate to create a uniform wet film in place thickness of 762 µm (30 mils) with an allowable range of ±50.8 µm (±2 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 1.4 square meters per liter (55 square feet per gallon). Initial dry retroreflectivity minimums for surface spray applied methyl-methacrylate shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings. Initial dry retroreflectivity minimums for recessed methyl-methacrylate shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

b. Extruded Markings. All extruded markings shall be applied at a rate to create a uniform wet film in place thickness of 2286 µm (90 mils) with an allowable range of ±127 µm (±5 mils) unless otherwise specified in the Contract Documents. Minimum application rates are 0.45 square meters per liter (18.3 square feet per gallon). Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

c. Structured Markings. All structured markings shall be applied at a rate to create a uniform wet film in place thickness as per the manufacturer's recommendations unless otherwise specified in the Contract Documents. Initial dry retroreflectivity minimums shall be 300 mcdl/lx/m^2 for yellow markings and 400 mcdl/lx/m^2 for white markings.

188. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby modified by deleting the phrase "Type II" (first entry) and replacing it with the phrase "Temporary Pavement Marking" in the first sentence.

189. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Pavement Marking Tape, Type II, is hereby modified by being re-named Temporary Pavement Marking Tape.

190. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Temporary Pavement Marking Tape, is hereby modified by deleting the first sentence in its entirety and replacing it as follows:

This tape for pavement markings is classified as temporary and is removable.

191. 646.08 TEMPORARY PAVEMENT MARKINGS, part (a) Temporary Pavement Marking Tape, second sentence, is hereby modified by deleting the phrase "Type II" and replacing it with the word "The" and by deleting the phrase "Subsection 708.12(b)" and replacing it with the phrase "Subsection 708.13(c)".

192. 646.08 TEMPORARY PAVEMENT MARKINGS, part (b) Pavement Marking Mask, is hereby modified by deleting the phrase "Subsection 708.12(c)" and replacing it with the phrase "Subsection 708.13(d)" in the second sentence.

193. 646.08 TEMPORARY PAVEMENT MARKINGS, part (c) Raised Pavement Markers, Type II, is hereby modified by adding the following sentence to the second (last) paragraph:

They shall conform to the requirements of Subsection 708.13(b) and shall be installed in accordance with the manufacturer's requirements.

194. 646.08 TEMPORARY PAVEMENT MARKINGS, part (d) Line Striping Targets, is hereby modified by being deleted in its entirety and replaced as follows:

(d) Line Striping Targets. Line striping targets are intended to be substitutes for pavement markings for not longer than 14 calendar days. Line striping targets shall be maintained and replaced as needed or as directed by the Engineer, until replaced by a temporary or permanent pavement marking.

Line striping targets of the color shown on the Plans or directed by the Engineer shall be installed as described below or as directed by the Engineer.

For solid longitudinal pavement markings, line striping targets shall be placed at 3 m (10 foot) intervals. For double centerline markings, line striping targets shall be paired. For dashed pavement markings, line striping targets shall be placed in groups of 3 spaced at 1.5 m (5 feet), with the groups separated by 10 m (30 foot) spaces, or as determined by the Engineer.

Line striping targets shall not be used to delineate passing zones on two lane non-divided highways.

Line striping targets shall conform to the requirements of Subsection 708.13(a) and shall be installed in accordance with the manufacturer's requirements.

195. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby further modified by deleting the first sentence of the last paragraph in its entirety and replacing it as follows:

Temporary markings on the wearing course of pavement that remain in place for fewer than fourteen calendar days shall be Temporary Pavement Marking Tape, Type II raised pavement markers, or line striping targets.

196. 646.08 TEMPORARY PAVEMENT MARKINGS, is hereby still further modified by deleting the word "seven" and replacing it with the word "fourteen" in the second (last) sentence of the last paragraph.

197. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby modified by deleting the phrase "provided is 125% of the material marking thickness" and replacing it with the phrase "meets the requirements of Table 646.09A" in the first sentence.

198. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby further modified by deleting the last sentence in its entirety.

199. 646.09 OTHER RELATED MARKINGS, part (a) Pavement Marking Recess, is hereby still further modified by adding the following paragraphs and Table:

The bottom of the recess shall have a smooth, flat finished surface. The use of gang stacked Diamond cutting blades is required for asphalt pavement surfaces. The spacers between blade cuts shall be such that there will be less than a 254 µm (10 mil) rise in the finished groove between the blades.

Recesses shall be clean, dry, and free of laitance, oil, dirt, grease, paint, or other foreign contaminants prior to application of the pavement markings. The Contractor shall re-clean grooves, as necessary, prior to application of any primer or permanent markings. Depth plates shall be provided by the Contractor to assure that desired groove depth is achieved.

TABLE 646.09A – PAVEMENT MARKING RECESS DEPTH

MARKING MATERIAL	STANDARD GLASS BEAD RECESS DEPTH µm (mils)	PREMIUM OPTIC RECESS DEPTH µm (mils)
Permanent Waterborne Paint	762-1016 (30-40)	762-1016 (30-40)
Spray Applied Methyl-methacrylate	1016-1270 (40-50)	1778-2286 (70-90)
Extruded Methyl-methacrylate	2540-2794 (100-110)	2540-2794 (100-110)*
Structured Methyl-methacrylate	As recommended by manufacturer	As recommended by manufacturer*
Thermoplastic	2540-2794 (100-110)	2540-2794 (100-110)*
Polyurea	762-1270 (30-50)	1778-2286 (70-90)
Epoxy	762-1270 (30-50)	1778-2286 (70-90)
Permanent Tape	As recommended by manufacturer	As recommended by manufacturer
*Thermoplastic and Methyl-methacrylate with wet recoverable or wet reflective elements shall have a recess depth of 3048-3302 µm (120-130 mils).		

200. 646.14 BASIS OF PAYMENT, part (a) Paint Pavement Markings, is hereby modified by adding the following pay item ranges:

646.200 to 646.209 100 mm (4 inch) White Line	Meter (Linear Foot)
646.2110 to 646.2119 100 mm (4 inch) Yellow Line	Meter (Linear Foot)
646.2140 to 646.2149 150 mm (6 inch) White Line	Meter (Linear Foot)
646.2150 to 646.2159 150 mm (6 inch) Yellow Line	Meter (Linear Foot)
646.221 to 646.229 200 mm (8 inch) White Line	Meter (Linear Foot)
646.231 to 646.239 200 mm (8 inch) Yellow Line	Meter (Linear Foot)
646.241 to 646.249 300 mm (12 inch) White Line	Meter (Linear Foot)
646.251 to 646.259 300 mm (12 inch) Yellow Line	Meter (Linear Foot)
646.261 to 646.269 600 mm (24 inch) Stop Bar	Meter (Linear Foot)
646.300 to 646.309 Letter or Symbol	Each
646.311 to 646.319 Crosswalk Marking	Meter (Linear Foot)
646.321 to 646.329 Railroad Crossing Symbol	Each

SECTION 653 - EROSION PREVENTION AND SEDIMENT CONTROL MEASURES

201. 653.15 BIOTECHNICAL SLOPE PROTECTION, part (a) Erosion Logs, is hereby modified by being deleted in its entirety and replaced with the following:

(a) Erosion Logs. Erosion logs shall be installed to intercept water flow and collect sediment and associated pollutants by settling and filtering. Erosion logs may be placed over bare or mulched soils or rolled erosion control products; around inlet and outlets; as check dams in unvegetated ditches, slope interrupters on steep slopes, and perimeter control; and along stream banks as a base for plantings. Some types of erosion logs (typically those with a heavier filtering medium such as compost) can be used in applications where underlying conditions are unsuitable (frozen ground, paved surfaces, sensitive plantings areas, etc.) for trenching.

Prior to placing erosion logs, the ground surface shall be properly graded and compacted and free of depressions or obstructions such as tree roots, protruding stones, or other foreign matter.

Erosion logs shall be installed in accordance with the manufacturer's installation guidelines, staking pattern guide, and details based upou the intended use on the construction site.

The Contractor shall remove accumulated sediment when it has reached 1/2 of the effective height of the log, or as directed by the Engineer. Alternatively, a new erosion log may be placed on top of and slightly behind the original one creating more sediment storage capacity. Erosion logs shall be maintained until disturbed area above the device has been permanently stabilized and construction activity has ceased.

When used as a temporary erosion prevention and sediment control measure, erosion logs may be cut open and left in place, but only if the fill material and netting are 100% biodegradable and the material is spread or graded flat so as to not cause concentration of future surface runoff.

SECTION 656 - PLANTING TREES, SHRUBS, AND VINES

202. 656.02 MATERIALS, is hereby modified by deleting the first entry in the Subsection listing (for "Barrier Fence") in its entirety.

203. 656.02 MATERIALS, is hereby further modified by adding the following as the second paragraph (directly below the Subsection listing):

Barrier Fence shall meet the requirements of Section 653.

SECTION 677 - OVERHEAD TRAFFIC SIGN SUPPORTS

204. 677.01 DESCRIPTION, is hereby modified by adding the phrase "and removing and disposing of existing overhead traffic sign supports," after the phrase "supports,".

205. 677.03 GENERAL, is hereby modified by adding the following paragraph:

Where existing overhead traffic sign supports are to be removed, the Contractor shall remove and dispose of the entire sign assembly, including concrete footings, to a depth of 450 mm (18 inches) below existing grade. Areas of ground disturbance shall be restored to the satisfaction of the Engineer.

206. 677.05 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Remove Existing Overhead Sign Assembly of the type specified to be measured for payment will be the number of each assembly removed in the complete and accepted work.

207. 677.06 BASIS OF PAYMENT, is hereby modified by adding the following paragraphs and pay items:

The accepted quantity of Remove Existing Overhead Sign Assembly of the type specified will be paid for at the Contract unit price per each. Payment will be full compensation for removing and disposing of assembly components, including concrete footings; for performing any excavation necessary; for restoring areas of ground disturbance; and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Costs associated with providing traffic control and/or flaggers for performing the work will be paid under the appropriate Contract item(s).

Payment will be made under:

Pay Item	Pay Unit
677.30 Remove Existing Overhead Sign Assembly, Cantilever	Each
677.35 Remove Existing Overhead Sign Assembly, Multi-Support	Each

SECTION 678 - TRAFFIC CONTROL SIGNALS

208. 678.01 DESCRIPTION, is hereby modified by adding the phrase ", and removing existing traffic control systems" after the word "system" in the first paragraph.

209. 678.02 MATERIALS, is hereby corrected by deleting "convers" and replacing it with the word "covers" in the second sentence of the last paragraph of the Subsection text.

210. 678.07 - DETECTORS AND CONTROLLERS, is hereby corrected by deleting "maufacturer" and replacing it with the word "manufacturer" in the first sentence of the second (last) paragraph.

211. 678.11 INSTALLATION, sixteenth paragraph, part (a), is hereby modified by adding the following:

The Contractor shall remove any equipment to be salvaged or reused in such a manner that the equipment is not damaged.

212. 678.13 METHOD OF MEASUREMENT, is hereby modified by adding the following paragraph:

The quantity of Removal of Existing Traffic Control Signal System to be measured for payment will be for each traffic control signal system removed in the complete and accepted work.

213. 678.14 BASIS OF PAYMENT, is hereby modified by adding the phrase "all removal, disposal, and salvage and/or reuse of existing system equipment and components," after the phrase "Electrical Wiring," in the second sentence of the first paragraph.

214. 678.14 BASIS OF PAYMENT, is hereby further modified by adding the following paragraph and pay item:

The accepted quantity of Removal of Existing Traffic Control Signal System will be paid for at the Contract unit price per each. Payment will be full compensation for removing and handling the existing traffic control signal system components as specified in the Contract Documents and for furnishing all labor, materials, tools, equipment, and incidentals necessary to complete the work.

Payment will be made under:

Pay Item	Pay Unit
678.45 Removal of Existing Traffic Control Signal System	Each

SECTION 700 GENERAL

215. 700.01 GENERAL STATEMENT, is hereby corrected by deleting punctuation ".,." at the end of the first sentence of the fourth paragraph and replacing it with punctuation ".".

216. 700.02 MATERIALS CERTIFICATIONS, part (a) General, is hereby modified by deleting subpart (3) in its entirety.

217. 700.02 MATERIALS CERTIFICATIONS, part (a) General, is hereby further modified by adding the following as the seventh paragraph:

All certifications shall be forwarded to the Vermont Agency of Transportation Materials Section.

SECTION 702 – BITUMINOUS MATERIALS

218. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby modified by adding the abbreviation "(PGB)" after the word "binder" in the first sentence.

219. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby further modified by deleting the second sentence of the first paragraph in its entirety and replacing it with the following:

PGB shall be asphalt prepared solely by the refining of crude petroleum and shall meet the requirements of AASHTO M 320 from facilities compliant with AASHTO R 29 without the addition of modifiers.

220. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby still further modified by adding the following as the third and fourth (last) sentences of the second paragraph:

If additives are used for the modification of asphalt, preapproval is required. The addition of any material not normally obtained during the initial refining process shall constitute modified asphalt and shall be labeled appropriately.

221. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (a) Properties, is hereby still further modified by adding the following as the third (last) paragraph:

The performance graded binder shall be manufactured in accordance with the approved Quality Control Plan. The manufacturer shall remain in compliance with the plan, including all notifications, sampling, testing, and reporting requirements.

222. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (b) Pretest, is hereby modified by being re-designated as part (c).

223. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), part (c) Certification, is hereby modified by being re-designated as part (d).

224. 702.02 PERFORMANCE-GRADED ASPHALT BINDER (PREPARED FROM PETROLEUM), is hereby modified by adding the following new part (b):

(b) Effect of Approval. VTrans reserves its right to remove its approval of any PGB lot if, in the sole discretion of the Agency, such approval was based on a material non-disclosure by the PGB supplier.

SECTION 708 - PAINTS, STAINS, AND TRAFFIC MARKING MATERIALS

225. 708.01 GENERAL REQUIREMENTS, part (c) Sampling, Testing, and Certification, subpart (2) Testing, is hereby modified by adding the following:

All other materials may be required to be tested on a cold weather AASHTO National Transportation Product Evaluation Program (NTPEP) pavement marking test deck.

226. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, is hereby modified by adding the following as the first paragraph:

Ready-mixed Low VOC Chlorinated Rubber Traffic Paint shall consist of 100% chlorinated rubber type, fast drying traffic paint that shall contain properly formulated pigment and vehicle to give the desired results.

227. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (1) Materials, is hereby modified by adding the following new subpart d.:

d. The paint shall contain a maximum of 0.005% w/w (50 ppm w/w) lead. The EPA Method 1311 (TCLP) extract of the paint shall not contain amounts of cadmium, mercury, hexavalent chromium, or other toxic heavy metals in excess of the limits specified in SW-846.

228. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby modified by deleting the phrase "and shall be a 100% acrylic binder" in the first sentence.

229. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby further modified by deleting the phrase "Table 708.08A" and replacing it with the phrase "the following:" in the second (last) sentence.

230. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (2) Composition, is hereby still further modified by deleting TABLE 708.08A in its entirety and replacing it with the following:

TABLE 708.08A – LOW VOC CHLORINATED RUBBER TRAFFIC PAINT COMPOSITION

PERFORMANCE CHARACTERISTIC	WHITE	YELLOW/BLUE/ GREEN
Pigment Content, % by Mass (Weight) (ASTM D3723)	55% min. 59% max.	55% min 59% max.
Vehicle Content, % by Mass (Weight)	38% min. 42% max.	38% min. 42% max.
VOC Content, Mass (Weight) per Unit Volume (ASTM D3960)	150 g/L (1.25 lb/gal) max.	150 g/L (1.25 lb/gal) max.
Lead Content, %	0.005% max.	0.005% max.
Yellow Pigment	N/A	Yellow #65 or #75
Titanium Dioxide, Rutile Type II, (ASTM D1394)	120 g/L (1.00 lb/gal) max.	25 g/L (0.21 lb/gal) max.
Total Non-Volatile Content, % by Mass (Weight) (ASTM D2369)	70.0% min.	69.0% min.
Density, (ASTM D1475)	1.50 ± 0.04 kg/L (12.5 ± 0.33) lb/gal	1.46 ± 0.04 kg/L (12.2 +/- 0.33 lb/gal)
Close Cup Flash Point (ASTM D 3278)	4°C (39 °F) min.	4°C (39°F) min.

TABLE 708.08B – LOW VOC ACETONE BASED TRAFFIC PAINT COMPOSITION

PERFORMANCE CHARACTERISTIC	WHITE	YELLOW/BLUE/ GREEN
Pigment Content, % by Mass (Weight) (ASTM D3723)	53% min. 57% max.	51% min 56% max.
Vehicle Content, % by Mass (Weight)	37% min. 42% max.	37% min. 42% max.
VOC Content, Mass (Weight) per Unit Volume (ASTM D3960)	150 g/L (1.25 lb/gal) max.	150 g/L (1.25 lb/gal) max.
Lead Content, %	0.005% max.	0.005% max.
Yellow Pigment	N/A	Yellow #65 or #75
Titanium Dioxide, Rutile Type II, (ASTM D1394)	120 g/L (1.00 lb/gal) max.	25 g/L (0.21 lb/gal) max.
Total Non-Volatile Content, % by Mass (Weight) (ASTM D2369)	70.0% min.	69.0% min.
Density, (ASTM D1475)	1.415 ± 0.04 kg/L (11.8 ± 0.33) lb/gal	1.367 ± 0.04 kg/L (11.4 +/- 0.33 lb/gal)
Close Cup Flash Point (ASTM D 3278)	-20°C (-4°F) min.	-20°C (-4°F) min.

231. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (3) Laboratory Tests, subpart a. Viscosity, is hereby modified by being deleted in its entirety and replaced as follows:

a. Viscosity.

1. Chlorinated Rubber Traffic Paint. The paint viscosity shall not be less than 74 nor more than 90 Krebs units at 25°C (77°F) when tested according to ASTM D562.

2. Acetone Based Traffic Paint. The paint viscosity shall not be less than 70 nor more than 88 Krebs units at 25°C (77°F) when tested according to ASTM D562.

232. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (4) Sampling and Testing, subpart a. Sampling Size, is hereby modified by deleting the phrase "per batch of each type and color of traffic paint" and replacing it with the phrase "of each traffic paint per batch," in the first sentence.

233. 708.08 PAINT FOR PAVEMENT MARKINGS, part (b) Low VOC Traffic Paint, subpart (4) Sampling and Testing, subpart c. Sample Delivery, is hereby modified by deleting the first paragraph in its entirety and replacing it as follows:

> All samples shall be delivered to the Materials Engineer, Vermont Agency of Transportation, Materials Section, 2178 Airport Road Unit B, Berlin, Vermont 05641.

234. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (3) Laboratory Tests, d. Drying Time (No Pick Up Time), is hereby modified by deleting the phrase "380 microns" and replacing it with the phrase "381 µm".

235. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (3) Laboratory Tests, e. No Track Time (Field Test), is hereby modified by deleting the phrase "508 microns" and replacing it with the phrase "508 µm" in the second sentence.

236. 708.08 PAINT FOR PAVEMENT MARKINGS, part (d) Waterborne Traffic Paint, subpart (4) Sampling and Testing, c. Sample Delivery, is hereby corrected by deleting the phrase "1716 Barre-Montpelier Road, Berlin, VT 05602" and replacing it with the phrase "2178 Airport Road Unit B, Berlin, Vermont 05641" in the first paragraph.

237. 708.09 GLASS BEADS, is hereby modified by being re-named OPTICS.

238. 708.09 OPTICS, is hereby modified by adding new part (a) heading Glass Beads.

239. 708.09 OPTICS, part (a) Properties, is hereby modified by being re-designated as subpart (1) under part (a) heading Glass Beads.

240. 708.09 OPTICS, part (b) Certification, is hereby modified by being re-designated as subpart (2) under part (a) heading Glass Beads.

241. 708.09 OPTICS, is hereby further modified by adding the following new parts (b) and (c):

(b) Premium Optics. Approved premium optics shall be one of the premium optics listed on the Approved Products List on file with the Agency's Research and Development Section.

(c) Wet Recoverable and Wet Reflective Optics. Approved wet recoverable and wet reflective optics shall be one of the wet recoverable and wet reflective optics listed on the Approved Products List on file with the Agency's Research and Development Section.

242. 708.10 THERMOPLASTIC PAVEMENT MARKINGS, is hereby modified by being deleted in its entirety and replaced as follows:

708.10 THERMOPLASTIC PAVEMENT MARKINGS.

(a) Thermoplastic Pavement Markings, Type A. Type A Thermoplastic Pavement Markings shall be one of the Thermoplastic Pavement Markings on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in long line applications or as specified in the Contract Documents. Thermoplastic composition shall comply with Table 708.10A.

TABLE 708.10A - THERMOPLASTIC PAVEMENT MARKING COMPOSITION
(by mass (weight)

Binder	18% Minimum
Filler	40% Maximum
Glass Beads	30 ±5-40%

(b) Thermoplastic Pavement Markings, Type B. Type B Thermoplastic Pavement Markings shall be one of the Preformed Thermoplastic Pavement Markings on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in intersection applications for legends, stopbars, or symbols or as specified in the Contract Documents.

243. 708.11 RAISED PAVEMENT MARKERS, is hereby modified by being re-named RAISED PAVEMENT MARKERS, TYPE I.

244. 708.12 PAVEMENT MARKING TAPE, is hereby modified by deleting parts (a) Pavement Marking Tape, Type I, (b) Pavement Marking Tape, Type II, and (c) Pavement Marking Mask in their entirety and replacing them as follows:

(a) Pavement Marking Tape, Type A. Type A Pavement Marking Tape shall be one of the non-removable permanent pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section that exhibit high adhesion, high durability, and high retroreflectivity. These markings shall be used in high AADT locations in long line applications as specified in the Contract Documents.

(b) Pavement Marking Tape, Type B. Type B Pavement Marking Tape shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used in lower AADT locations in long line applications as specified in the Contract Documents.

(c) Pavement Marking Tape, Type C. Type C Pavement Marking Tape shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used at intersection locations only as specified in the Contract Documents.

245. 708.12 PAVEMENT MARKING TAPE, is hereby further modified by adding the following new part (d):

(d) Pavement Marking Tape, Type D. Type D Pavement Marking Tape for legends and symbols shall be one of the non-removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section. These markings shall be used for preformed traffic markings made of the same material as that of an approved permanent Type A, B, or C tape.

246. 708.13 PREFORMED TRAFFIC MARKINGS AND SYMBOLS, is hereby modified by being deleted in its entirety and replaced as follows:

708.13 TEMPORARY DELINEATION SYSTEMS.

(a) Line Striping Targets. Line Striping Targets shall be one of the Line Striping Targets on the Approved Products List on file with the Agency's Research and Development Section.

(b) Raised Pavement Markers, Type II. Acceptable Raised Pavement Markers shall be one of the Raised Pavement Markers on the Approved Products List on file with the Agency's Research and Development Section.

(c) Temporary Pavement Marking Tape. Pavement Marking Tape shall be one of the removable pavement marking tapes on the Approved Products List on file with the Agency's Research and Development Section.

(d) Pavement Marking Mask. Pavement Marking Mask shall be one of the Masking Marking Tapes on the Approved Products List on file with the Agency's Research and Development Section.

247. 708.14 LINE STRIPING TARGETS, is hereby modified by being deleted in its entirety.

SECTION 710 - CULVERTS, STROM DRAINS, AND SEWER PIPES, NONMETAL

248. 710.03 CORRUGATED POLYETHYLENE PIPE, is hereby modified by adding the following as the last sentence:

In order to maintain approval status, polyethylene pipe manufacturers must participate in, and maintain compliance with, the AASHTO National Transportation Product Evaluation Program (NTPEP), which audits producers of the pipe.

249. 710.07 CORRUGATED POLYPROPYLENE PIPE, is hereby made a new Subsection of the Standard Specifications as follows:

250. 710.07 CORRUGATED POLYPROPYLENE PIPE. Corrugated polypropylene pipe and fittings shall conform to the latest revisions of AASHTO M 330, Type S. Acceptable corrugated polypropylene pipe shall be one of the corrugated polypropylene pipe products on the Approved Products List on file with the Agency's Materials and Research Section. In order to maintain approval status, polypropylene pipe manufacturers must participate in, and maintain compliance with, the AASHTO National Transportation Product Evaluation Program (NTPEP), which audits producers of the pipe.

SECTION 712 - CRIBBING MATERIALS

251. 712.04 GABION BASKETS, part (a) Wire for Gabion Baskets, is hereby modified by changing the word "shall" to the word "may" and by adding the phrase "or welded panels" after the phrase "woven wire mesh" in the first sentence of the first paragraph.

252. 712.04 GABION BASKETS, part (a) Wire for Gabion Baskets, is hereby further modified by adding the following as the third sentence of the first paragraph:

Welded panels shall be coated by hot dip galvanizing after fabrication.

253. 712.04 GABION BASKETS, part (b) PVC Coating for Gabion Baskets, is hereby modified by adding the following new subpart (7):

(7) Punch Test. The mesh shall achieve satisfactory performance on the Punch Test, as described in ASTM A975 13.1.4. This requirement applies to both woven and welded gabion baskets.

SECTION 713 - REINFORCING STEEL, WELDED WIRE REINFORCEMENT, AND REINFORCING STRAND

254. 713.01 BAR REINFORCEMENT, is hereby modified by deleting the phrase "conforming to AASHTO M 31M/M 31, including supplementary requirements" and replacing it with the phrase ", unless otherwise specified in the Contract Documents" in the first paragraph.

255. 713.01 BAR REINFORCEMENT, is hereby further modified by adding the following new parts (a)-(f) and associated paragraphs:

(a) Plain Reinforcing Steel. Plain reinforcing steel shall conform to AASHTO M 31M/M 31, including supplementary requirements.

(b) Low Alloy Reinforcing Steel. Low alloy reinforcing steel shall conform to ASTM A 706/A 706M.

(c) Epoxy Coated Reinforcing Steel. Epoxy coated reinforcing steel shall have an electrostatically applied organic epoxy protective coating, which has been prequalified, fabricated, tested, and installed in accordance with AASHTO M 284M/M 284.

(d) Stainless Clad Reinforcing Steel. Stainless clad reinforcing steel shall meet the requirements of AASHTO M 329M/M 329.

(e) Dual-Coated Reinforcing Steel. Dual-coated reinforcing steel shall meet the requirements of ASTM A 1055/A 1055M.

(f) Solid Stainless Reinforcing Steel. Solid stainless reinforcing steel shall meet the requirements of ASTM A 955/A 955M with one of the following UNS designations: S24100, S30400, S31603, S31653, S32101, S32201, S32205, or S32304. Different designations shall not be mixed within the same project.

Where no core steel requirements are specified in the above specifications, the steel core of the bar reinforcement shall meet the requirements of plain reinforcing steel.

Certification. A Type D Certification shall be furnished in accordance with Subsection 700.02. Certification for Epoxy Coated Reinforcing Steel shall include the coating and coating process.

256. 713.07 COATED BAR REINFORCEMENT, is hereby modified by being deleted in its entirety.

257. 713.02 MECHANICAL SPLICES FOR BAR REINFORCEMENT, is hereby modified by adding the phrase ",except that epoxy coated mechanical splices shall be allowed when Level II reinforcing steel is required" after the phrase "intended to splice" in the second sentence of the first paragraph.

SECTION 714 - STRUCTURAL STEEL

258. 714.08 ANCHOR BOLTS, BEARING DEVICES, is hereby corrected by deleting ".F" and replacing it with "F" in the first sentence of the first paragraph.

259. 714.08 ANCHOR BOLTS, BEARING DEVICES, is hereby further corrected by deleting punctuation "." and replacing it with punctuation "." at the end of the second sentence of the first paragraph.

SECTION 726 - PROTECTIVE COATINGS AND WATERPROOFING MATERIALS

260. 726.10 CONCRETE STAINING AND SEALING SYSTEMS, is hereby made a new Subsection of the Standard Specifications as follows:

726.10 CONCRETE STAINING AND SEALING SYSTEMS. Approved Concrete Staining and Sealing Systems shall be one of the Concrete Staining and Sealing Systems on the Approved Products List on file with the Agency's Materials and Research Section.

261. 726.11 SHEET MEMBRANE WATERPROOFING, PREFORMED SHEET, is hereby made a new Subsection of the Standard Specifications as follows:

726.11 SHEET MEMBRANE WATERPROOFING, PREFORMED SHEET. Approved Preformed Sheet Membrane Waterproofing Systems shall be one of the Preformed Sheet Membrane Waterproofing Systems on the Approved Products List on file with the Agency's Materials and Research Section.

SECTION 731 - BEARING PADS FOR STRUCTURES

262. 731.03 ELASTOMERIC MATERIAL, is hereby modified by deleting the second and third paragraphs in their entirety and replacing them with the following:

Unless noted otherwise, elastomer shall have a design hardness of 50 points and a design shear modulus of 0.8 MPa (110 psi).

Testing of elastomeric material shall be waived for bearings that will be encased in concrete in the final work. All other bearings shall be tested in accordance with the following table:

TABLE 731.03A - REQUIRED TESTS

Material Property	Test Method	Required Result
Hardness	ASTM D 2240	design hardness +/- 5 points
	or	
Shear Modulus	ASTM D 412 with AASTHO M 251 Section 8.8.4	design shear modulus +/- 15%
Low Temperature Brittleness	ASTM D 746 Procedure B	Pass Grade 4 test
Shear Bond Strength	AASHTO M 251 Annex A2 or Appendix X2	Pass
Min Tensile Strength	ASTM D 412	15.6 MPa (2250 psi)
Min Ultimate Elongation	ASTM D 412	(650 - 5 X design hardness)%

SECTION 755 - LANDSCAPING MATERIALS

263. 755.17 EROSION LOGS, is hereby modified by being deleted in its entirety and replaced with the following:

Erosion logs are available in varying diameters. The Contractor shall follow the manufacturer's recommendations for the material type and size based on the intended use.

Erosion logs shall be composed of weed-seed-free coir, straw, excelsior, compost, or other biodegradable filtering medium encased in a photo-degradable and/or biodegradable netting or mesh.

Netting shall have openings of 13 to 25 mm (1/2 to 1 inch), with the exception of compost filled logs which should be 3 to 10 mm (1/8 to 3/8 inch) or as recommended by the manufacturer and accepted by the Engineer.

Anchors for erosion logs shall be wooden stakes, U-shaped wire or earth anchors, or rebar stakes; the size and length shall be as recommended by the manufacturer.

Compost shall meet the requirements of Table 755.05A, with the exception that particle size shall be 99% < 50 mm (2 inches) and maximum 30% < 10 mm (3/8 inch).

SECTION 780 - CONCRETE REPAIR MATERIALS

264. 780.05 POLYMER CONCRETE REPAIR MATERIAL, is hereby made a new Subsection of the Standard Specifications as follows:

780.05 POLYMER CONCRETE REPAIR MATERIAL. Approved Polymer Concrete Repair Materials shall be one of the Polymer Concrete Repair Materials on the Approved Products List on file with the Agency's Materials and Research Section.

ATTACHMENT C: STANDARD STATE PROVISIONS
FOR CONTRACTS AND GRANTS

1. **Entire Agreement:** This Agreement, whether in the form of a Contract, State Funded Grant, or Federally Funded Grant, represents the entire agreement between the parties on the subject matter. All prior agreements, representations, statements, negotiations, and understandings shall have no effect.

2. **Applicable Law:** This Agreement will be governed by the laws of the State of Vermont.

3. **Definitions:** For purposes of this Attachment, "Party" shall mean the Contractor, Grantee or Subrecipient, with whom the State of Vermont is executing this Agreement and consistent with the form of the Agreement.

4. **Appropriations:** If this Agreement extends into more than one fiscal year of the State (July 1 to June 30), and if appropriations are insufficient to support this Agreement, the State may cancel at the end of the fiscal year, or otherwise upon the expiration of existing appropriation authority. In the case that this Agreement is a Grant that is funded in whole or in part by federal funds, and in the event federal funds become unavailable or reduced, the State may suspend or cancel this Grant immediately, and the State shall have no obligation to pay Subrecipient from State revenues.

5. **No Employee Benefits For Party:** The Party understands that the State will not provide any individual retirement benefits, group life insurance, group health and dental insurance, vacation or sick leave, workers compensation or other benefits or services available to State employees, nor will the state withhold any state or federal taxes except as required under applicable tax laws, which shall be determined in advance of execution of the Agreement. The Party understands that all tax returns required by the Internal Revenue Code and the State of Vermont, including but not limited to income, withholding, sales and use, and rooms and meals, must be filed by the Party, and information as to Agreement income will be provided by the State of Vermont to the Internal Revenue Service and the Vermont Department of Taxes.

6. **Independence, Liability:** The Party will act in an independent capacity and not as officers or employees of the State.

   The Party shall defend the State and its officers and employees against all claims or suits arising in whole or in part from any act or omission of the Party or of any agent of the Party. The State shall notify the Party in the event of any such claim or suit, and the Party shall immediately retain counsel and otherwise provide a complete defense against the entire claim or suit.

   After a final judgment or settlement the Party may request recoupment of specific defense costs and may file suit in Washington Superior Court requesting recoupment. The Party shall be entitled to recoup costs only upon a showing that such costs were entirely unrelated to the defense of any claim arising from an act or omission of the Party.

   The Party shall indemnify the State and its officers and employees in the event that the State, its officers or employees become legally obligated to pay any damages or losses arising from any act or omission of the Party.

7. **Insurance**: Before commencing work on this Agreement the Party must provide certificates of insurance to show that the following minimum coverages are in effect. It is the responsibility of the Party to maintain current certificates of insurance on file with the state through the term of the Agreement. No warranty is made that the coverages and limits listed

herein are adequate to cover and protect the interests of the Party for the Party's operations. These are solely minimums that have been established to protect the interests of the State.

Workers Compensation: With respect to all operations performed, the Party shall carry workers' compensation insurance in accordance with the laws of the State of Vermont.

General Liability and Property Damage: With respect to all operations performed under the contract, the Party shall carry general liability insurance having all major divisions of coverage including, but not limited to:

Premises - Operations
Products and Completed Operations
Personal Injury Liability
Contractual Liability

The policy shall be on an occurrence form and limits shall not be less than:

$1,000,000 Per Occurrence
$1,000,000 General Aggregate
$1,000,000 Products/Completed Operations Aggregate
$ 50,000 Fire/ Legal/Liability

Party shall name the State of Vermont and its officers and employees as additional insureds for liability arising out of this Agreement.

Automotive Liability: The Party shall carry automotive liability insurance covering all motor vehicles, including hired and non-owned coverage, used in connection with the Agreement. Limits of coverage shall not be less than: $1,000,000 combined single limit.

Party shall name the State of Vermont and its officers and employees as additional insureds for liability arising out of this Agreement.

8. **Reliance by the State on Representations:** All payments by the State under this Agreement will be made in reliance upon the accuracy of all prior representations by the Party, including but not limited to bills, invoices, progress reports and other proofs of work.

9. **Requirement to Have a Single Audit:** In the case that this Agreement is a Grant that is funded in whole or in part by federal funds, the Subrecipient will complete the Subrecipient Annual Report annually within 45 days after its fiscal year end, informing the State of Vermont whether or not a Single Audit is required for the prior fiscal year. If a Single Audit is required, the Subrecipient will submit a copy of the audit report to the granting Party within 9 months. If a single audit is not required, only the Subrecipient Annual Report is required.

   For fiscal years ending before December 25, 2015, a Single Audit is required if the subrecipient expends $500,000 or more in federal assistance during its fiscal year and must be conducted in accordance with OMB Circular A-133. For fiscal years ending on or after December 25, 2015, a Single Audit is required if the subrecipient expends $750,000 or more in federal assistance during its fiscal year and must be conducted in accordance with 2 CFR Chapter I, Chapter II, Part 200, Subpart F. The Subrecipient Annual Report is required to be submitted within 45 days, whether or not a Single Audit is required.

10. **Records Available for Audit:** The Party shall maintain all records pertaining to performance under this agreement. "Records" means any written or recorded information, regardless of physical form or characteristics, which is produced or acquired by the Party in

the performance of this agreement. Records produced or acquired in a machine readable electronic format shall be maintained in that format. The records described shall be made available at reasonable times during the period of the Agreement and for three years thereafter or for any period required by law for inspection by any authorized representatives of the State or Federal Government. If any litigation, claim, or audit is started before the expiration of the three year period, the records shall be retained until all litigation, claims or audit findings involving the records have been resolved.

11. **Fair Employment Practices and Americans with Disabilities Act**: Party agrees to comply with the requirement of Title 21V.S.A. Chapter 5, Subchapter 6, relating to fair employment practices, to the full extent applicable. Party shall also ensure, to the full extent required by the Americans with Disabilities Act of 1990, as amended, that qualified individuals with disabilities receive equitable access to the services, programs, and activities provided by the Party under this Agreement. Party further agrees to include this provision in all subcontracts.

12. **Set Off**: The State may set off any sums which the Party owes the State against any sums due the Party under this Agreement; provided, however, that any set off of amounts due the State of Vermont as taxes shall be in accordance with the procedures more specifically provided hereinafter.

13. **Taxes Due to the State**:

    a. Party understands and acknowledges responsibility, if applicable, for compliance with State tax laws, including income tax withholding for employees performing services within the State, payment of use tax on property used within the State, corporate and/or personal income tax on income earned within the State.

    b. Party certifies under the pains and penalties of perjury that, as of the date the Agreement is signed, the Party is in good standing with respect to, or in full compliance with, a plan to pay any and all taxes due the State of Vermont.

    c. Party understands that final payment under this Agreement may be withheld if the Commissioner of Taxes determines that the Party is not in good standing with respect to or in full compliance with a plan to pay any and all taxes due to the State of Vermont.

    d. Party also understands the State may set off taxes (and related penalties, interest and fees) due to the State of Vermont, but only if the Party has failed to make an appeal within the time allowed by law, or an appeal has been taken and finally determined and the Party has no further legal recourse to contest the amounts due.

14. **Child Support**: (Applicable if the Party is a natural person, not a corporation or partnership.) Party states that, as of the date the Agreement is signed, he/she:

    a. is not under any obligation to pay child support; or
    b. is under such an obligation and is in good standing with respect to that obligation; or
    c. has agreed to a payment plan with the Vermont Office of Child Support Services and is in full compliance with that plan.

    Party makes this statement with regard to support owed to any and all children residing in Vermont. In addition, if the Party is a resident of Vermont, Party makes this statement

with regard to support owed to any and all children residing in any other state or territory of the United States.

15. **Sub-Agreements**: Party shall not assign, subcontract or subgrant the performance of this Agreement or any portion thereof to any other Party without the prior written approval of the State. Party also agrees to include in all subcontract or subgrant agreements a tax certification in accordance with paragraph 13 above.

16. **No Gifts or Gratuities**: Party shall not give title or possession of any thing of substantial value (including property, currency, travel and/or education programs) to any officer or employee of the State during the term of this Agreement.

17. **Copies**: All written reports prepared under this Agreement will be printed using both sides of the paper.

18. **Certification Regarding Debarment:** Party certifies under pains and penalties of perjury that, as of the date that this Agreement is signed, neither Party nor Party's principals (officers, directors, owners, or partners) are presently debarred, suspended, proposed for debarment, declared ineligible or excluded from participation in federal programs, or programs supported in whole or in part by federal funds.

    Party further certifies under pains and penalties of perjury that, as of the date that this Agreement is signed, Party is not presently debarred, suspended, nor named on the State's debarment list at: http://bgs.vermont.gov/purchasing/debarment

19. **Certification Regarding Use of State Funds:** In the case that Party is an employer and this Agreement is a State Funded Grant in excess of $1,001, Party certifies that none of these State funds will be used to interfere with or restrain the exercise of Party's employee's rights with respect to unionization.

(End of Standard Provisions)

State of Vermont
Agency of Transportation

January 6, 2015

Special Provisions for: Lincoln BRF 0188(8)

1. LABOR SUPPLY. Available workers for this Contract may be obtained from Manager, Employment & Training, Middlebury, VT. The latest edition of the DBE Registry can be obtained from the Office of Civil Rights and Labor's Webpage at the following address: www.aot.state.vt.us/CivilRights/default.htm. Contractors that do not have access to the internet may obtain a copy from the Office of Contract Administration upon request.

2. CONTRACT COMPLETION DATE. This Contract shall be completed on or before October 2, 2015.

3. NOTICE TO BIDDERS. U.S. Department of Labor Davis-Bacon wage rates are applicable to this Contract. Copies of the applicable rates are included in this proposal.

4. CONTACT WITH THE AGENCY. From the time of advertising until the actual bid opening for this Contract, all prospective Contractors, subcontractors, and suppliers shall direct all inquiries related to this project solely to the Agency's Office of Contract Administration at (802) 828-2641. This number may also be accessed via the Agency's TTY/TDD Telecommunications Relay Service at 1-800-253-0191.

   The deadline for submitting inquiries related to this project to the Office of Contract Administration is 4:30 p.m. Eastern Standard Time on January 23, 2015. No exceptions will be made to this requirement.

5. NOTICE TO BIDDERS. The Contractor is hereby notified that in the absence of the Engineer, the Agency's Safety Officer and the Agency's Hazardous Materials and Waste Coordinator shall each have the authority to suspend work when they determine that a serious safety or environmental violation exists on the job site. The period of time work is suspended due to a serious safety or environmental violation will not be justification for an extension of time.

6. STANDARD SPECIFICATIONS. The provisions of the 2011 STANDARD SPECIFICATIONS FOR CONSTRUCTION, as modified herein, shall apply to this Contract.

7. SUPPLEMENTAL SPECIFICATIONS AND CONTRACT REQUIREMENTS. The Contractor's attention is directed to the following specifications and contract requirements included in the Proposal form and effective for this Contract:

Required Contract Provisions for Federal-Aid Construction
Standard Federal EEO Specifications
VT Agency of Transportation Contractor Workforce Reporting Requirements
Workers' Compensation; State Contracts Compliance Requirement
General Special Provisions dated May 6, 2014
Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants
Vermont Minimum Labor & Truck Rates
Disadvantaged Business Enterprise (DBE) Policy Contract Requirements
U.S. Department of Labor Davis-Bacon Wage Rates
Asphalt Price Adjustment Provisions dated April 6, 2010
Stream Alteration Consultation (e-mail) dated November 5, 2013
Construction General Permit (CGP) 3-9020 (Amended 2008) Authorization of Notice of Intent #7136-9020 dated January 28, 2014
Army Corps of Engineers Permit #NAE-2013-2487 dated December 12, 2013
Certification for Federal-Aid Contracts
Contractor's EEO Certification Form
Debarment & Non-Collusion Affidavit

8. NOTICE TO BIDDERS - CONTRACT INSURANCE REQUIREMENTS. The Contractor is hereby notified that in the event of a discrepancy between the stated insurance requirements of Bulletin 3.5 Attachment C: Standard State Provisions for Contracts and Grants and those of Subsection 103.04 of the Standard Specifications for Construction, the requirements of Subsection 103.04 of the Standard Specifications for Construction shall govern.

9. NOTICE TO BIDDERS - ADDITIONAL CONTRACT REQUIREMENT. For construction and transportation projects over $250,000.00, a payroll process by which during every pay period the Contractor collects from the subcontractors or independent contractors a list of all workers who were on the jobsite during the pay period, the work performed by those workers on the jobsite, and a daily census of the jobsite. This information, including confirmation that Contractors, subcontractors, and independent contractors have the appropriate workers' compensation coverage for all workers at the jobsite, and similar information for the subcontractors regarding their subcontractors shall also be provided to the Department of Labor and to the Department of Banking, Insurance, Securities, and Health Care Administration, upon request, and shall be available to the public.

10. NOTICE TO BIDDERS - RE-DESIGNATION OF VTRANS OFFICIALS. The Contractor is hereby notified of the following re-designation of VTrans officials as referenced in the Contract Documents:

Where in the Contract Documents it reads:	It shall be read as and shall mean:
Director of Program Development	Chief Engineer
Assistant Director of Program Development	Deputy Chief Engineer
Roadway, Traffic, and Safety Engineer; Roadway Program Manager; Highway Safety & Design Engineer; Structures Engineer; Structures Program Manager	Director of Project Delivery Bureau
Chief of Local Transportation Facilities	Director of Municipal Assistance Bureau
Construction Engineer; Materials and Research Engineer	Director of Construction and Materials Bureau
Director of Operations	Director of Maintenance and Operations Bureau

11. NOTICE TO BIDDERS. This Contract calls for an aggressive project schedule. To facilitate the successful construction of this project, VTrans expects the Contractor to provide prompt contract signing, and complete and accurate construction and fabrication submittals. Timely delivery of materials prior to the Bridge Closure Period is also important to the success of this project.

12. NOTICE TO BIDDERS - INCENTIVE/DISINCENTIVE (I/D). The Agency's intent is to have the bridge closure period (BCP) be as short in duration as possible. To encourage the Contractor to provide a maximum effort to complete the Identified Work for I/D within the period as defined below, the Agency is willing to pay an incentive.

(a) Dates. The allowable BCP is fifty (50) consecutive calendar days between June 18, 2015 and August 28, 2015, inclusive. The fifty (50) consecutive calendar day BCP is herein defined as the I/D period. The BCP shall begin no earlier than 7:00 a.m. on the first calendar day of the I/D period and end no later than 6:59 p.m. on the 50th calendar day of the I/D period. During the BCP, the Contractor will be allowed to work on Bridge No. 19 for 24 hours per day, 7 days per week, including holiday periods.

Night work will be allowed during the I/D period. See Special Provision Nos. 13 NOTICE TO BIDDERS - REQUIREMENTS FOR NIGHTTIME WORK and 14 NOTICE TO BIDDERS - NIGHTTIME WORK RESTRICTIONS for additional information and requirements.

Upon any Contractor's receipt of the VAOT Contract award letter, the Contractor shall submit to the VAOT Construction Section for review and approval a certified letter indicating the BEGIN CONSTRUCTION DATE for the BCP work. This letter shall be received by the Construction Section a minimum of twenty-one (21) calendar days prior to the BEGIN CONSTRUCTION DATE indicated in the letter. The BEGIN CONSTRUCTION DATE shall be determined by the Contractor.

The I/D period as established above for this Contract is absolutely fixed and will not be changed for any Act of God, omission, improper action, direction of the Engineer, or any other reason unless done so by the Secretary and only under extreme conditions as determined by the Secretary.

There shall be a pre-closure coordination meeting held on site one (1) week prior to the BCP with all subcontractors, the Contractor's superintendent, the Engineer, the Project Manager, the Town of Lincoln, the Construction Structures Engineer, and the design consultant to discuss durations of work, types of night work, work sequencing, etc. The Contractor shall be responsible for setting this meeting up and making appropriate contacts. In addition, weekly meetings between the Contractor, Engineer, and other pertinent parties as determined by the Engineer shall be held to discuss the project progress and future construction activities, and current CPM progress schedules and narratives.

(b) Identified Work. All work required to open new Bridge No. 19 to two-way traffic including:

a. Bridge railing installed;

b. Approach guardrail installed; and

c. Base pavement placed.

Prior to the BCP, the Contractor is allowed to maintain alternating one-way traffic during working hours only; two-way traffic shall be maintained during non-working hours. Following the end of the BCP, the Contactor shall maintain a minimum of one-way alternating traffic during working hours and two-way traffic during non-working hours. Wherever one-way alternating traffic is maintained by the Contractor, the traveling public shall not be delayed more than 10 minutes unless otherwise directed by the Engineer. A temporary bridge will not be allowed at any time during construction of this project.

Work to be completed prior to the BCP may include preparation for bridge closure, including ledge removal, installation of temporary erosion control measures, installation of traffic control devices, construction of access roads, and utility relocation.

(c) Pay Schedule. The Contractor will receive a lump sum compensation of nineteen thousand eight-hundred dollars ($19,800) for completing the Identified Work before the end of the I/D period.

In addition, the Contractor will be compensated at a rate of five thousand one-hundred dollars ($5,100) per day that the Identified Work is completed prior to the end of the I/D period, up to a maximum total payment as specified herein. Only full days where the new bridge is opened by 6:59 a.m. will count toward this extra incentive payment.

The maximum amount payable under the incentive clause shall be fifty-five thousand five-hundred dollars ($55,500) (including the lump sum payment).

For each day after the end of the I/D period that the Identified Work remains uncompleted, the Contractor will be assessed a disincentive at a rate of five thousand one-hundred dollars ($5,100) per day. The full daily disincentive amount will be assessed for each day that traffic is not allowed on the bridge for any portion of the day. There shall be no maximum on the disincentive amount.

This assessed disincentive is separate from, and will be imposed in addition to, liquidated damages which may be imposed for failure to complete the Contract on time.

(d) Underruns and Overruns. The proposal indicates an estimated quantity for each Contract pay item. The fact that the actual amounts used in the construction of this project may vary from the estimate will not be a basis or cause for changing any of the conditions for I/D.

The Agency recognizes that additional work beyond the work indicated in the Plans is always possible in any construction contract. The Agency is willing to pay for necessary additional work in accordance with the terms and requirements of the Contract and the Standard Specifications for Construction, however, the Contractor shall absorb any resulting construction time within the original project and CPM Schedules, and there will be no adjustments or changes to the I/D dates or I/D conditions.

(e) Payment. Payment will be made as specified in Section 900.

13. NOTICE TO BIDDERS – REQUIREMENTS FOR NIGHTTIME WORK. The Contractor is hereby notified that night work will be allowed within the bridge closure period. For the purposes of this Contract, "night" shall mean from the hours of 7:00 p.m. until 5:00 a.m. of the following day. The Engineer may abbreviate this time period as necessary for safety considerations.

Night work shall be performed in accordance with the National Cooperative Highway Research Program (NCHRP) Report 476 – "Guidelines for Design and Operation of Nighttime Traffic Control for Highway Maintenance and Construction". A copy of this guideline specification may be downloaded from the following website: http://onlinepubs.trb.org/onlinepubs/nchrp/nchrp_rpt_476.pdf.

Prior to beginning night work, the Contractor shall design a lighting system and present it to the Engineer for approval. The Contractor shall not perform any night work or activities within the project limits until the lighting system has been fully approved and is in place on the project.

The designed lighting system shall be mobile, shall be mounted separately from other construction equipment, shall illuminate the entire work area to daylight intensity with minimal glare, and shall be a surrounding design that minimizes shadows in the work area as much as possible.

All costs associated with the lighting system will be considered incidental to Contract item 900.645 Special Provision (Traffic Control, All-Inclusive).

14. NOTICE TO BIDDERS - NIGHTTIME WORK RESTRICTIONS. The Contractor is hereby notified that during the bridge closure period, no work shall be performed between the hours of 9:00 p.m. and 5:00 a.m. that creates a noise level exceeding 75 decibels. The decibel level shall be measured from the point of activity to the nearest occupied residence.

Construction activities expected to reach this noise threshold include pneumatic hammers, hoe-ram, and similar impact type equipment.

The Contractor shall provide the Engineer, for the duration of the nighttime work, with a sound level meter capable of measuring this noise criteria during the bridge closure period.

Sound level meters shall be Rion NL-20, CESVA SC-160, Extech 407780 or an approved equal capable of meeting IEC60651: 1979 Type 2 and IEC60804: 1985 Type 2 Standards.

The cost for providing this equipment and meeting the specified noise level criteria will not be paid for separately, but will be considered incidental to all other Contract items.

15. NOTICE TO BIDDERS. All temporary construction signs shall meet the following requirements:

A. Where sign installations are not protected by guardrail or other approved traffic barriers, all sign stands and post installations shall meet National Cooperative Highway Research Program (NCHRP) Report 350 or the AASHTO Manual for Assessing Safety Hardware (MASH). The appropriate resource shall be determined as described in the MASH publication. No sign posts shall extend over the top of the sign installed on said post(s). When anchors are installed, stub shall not be greater than 100 mm (4 inches) above existing ground.

B. As a minimum, roll up sign material shall have ASTM D 4956 Type VI fluorescent orange retroreflective sheeting.

C. All post-mounted signs and solid substrate portable signs shall have ASTM D 4956 Type VII, Type VIII, or Type IX fluorescent orange retroreflective sheeting.

D. All retroreflective sheeting on traffic cones, barricades, and drums shall be at a minimum ASTM D 4956 Type III sheeting.

E. All stationary signs shall be mounted on two 4.5 kg/m (3 lb/ft) flanged channel posts or 51 mm (2 inch) square steel inserted in 57 mm (2 ¼") galvanized square steel anchors. No sign posts shall extend over the top edge of sign installed on said posts.

F. Prior to placing temporary work zone signs on the project, the Contractor must furnish for the Engineer's approval a detail for temporary work zone signs on steel posts showing stubs projecting a maximum of 100 mm (4 inches) above ground level and bolts for sign post.

G. Construction signs shall be installed so as to not interfere with nor obstruct the view of existing traffic control devices, stopping sight distance, and corner sight distance from drives and town highways.

H. Speed zones, if used, should be a maximum of 16 kph (10 mph) below existing posted speeds. Temporary speed limit certificates must be approved by the Chief Engineer.

16. NOTICE TO BIDDERS. All retroreflective sheeting on permanent signs (signs to remain after the project is completed) shall be at a minimum ASTM D 4956 Type III sheeting, unless otherwise shown on the Plans.

17. RIGHT-OF-WAY SPECIAL AGREEMENTS.

Parcel #4
Property Owner: Hartman, Eric F. & Raeber-Spina, Sarah F.
Description: Tree Cutting

Any trees felled on the property of the Grantors which produce usable firewood shall be cut, stacked and placed on the Grantor's land, outside of the Town Highway 1 right of way, in a place accessible to the Grantors and agreeable between the Grantors and Resident Engineer for the project.

18. UTILITIES. Existing aerial facilities owned by Green Mountain Power Corporation, Waitsfield Champlain Valley Telecom, and Comcast Communications will be adjusted, as necessary, by employees or agents of the above companies in accordance with the approximate aerial utility relocation route shown on the Plans.

Contacts for the above listed utility companies are:

Green Mountain Power Corp.:	Scott Buysse	- (802)747-5863
Waitsfield Champlain Valley Telecom:	Kathi McGrath	- (802)496-8323
Comcast Communications:	Jeremy Cota	- (802)846-2412

The Contractor is advised that exploratory excavation to locate existing underground facilities may be necessary to protect these facilities from damage. Where approved by the Engineer, these utilities shall be located and/or exposed by methods such as air/vacuum excavation and/or hand digging to determine their exact location. This exploratory work shall be classified as Trench Excavation of Earth, Exploratory and payment will be made under Contract item 204.22.

Employees or agents of the above listed companies are to be allowed free and full access within the project limits with the tools, materials, and equipment necessary to install, operate, maintain, place, replace, relocate, and remove their facilities.

There will be no extra compensation paid to the Contractor for any inconvenience caused by working around and with the companies or their facilities.

Vermont Statutes Annotated, Title 30, Chapter 86 ("Dig Safe") requires notice to Dig Safe before starting excavation activities. The Contractor must telephone Dig Safe at 811 at least 48 hours (excluding Saturdays, Sundays and legal holidays) before, but not more than 30 days before, starting excavation activities at any location. In addition, before excavation and/or pavement grinding in or on the state highway right-of-way, the Contractor must contact the Agency's District Transportation Administrator to obtain/verify the location of Agency's underground utility facilities or to confirm the absence of such facilities.

Should the Contractor desire additional adjustments of the utility facilities for his/her convenience, proper arrangements shall be made in conformance with Subsection 105.07 of the Standard Specifications for Construction.

All Contractors, subcontractors or material suppliers involved in any project-related activity shall comply with all applicable codes and regulations related to working around live electrical lines; including, but not limited to maintaining the required minimum clear distance from an electrical utility facility. The Contractor's Competent Safety Officer shall be well versed in OSHA and VOSHA regulations, and shall be capable of implementing a plan to conform to these regulations during prosecution of work.

19. HIGHWAY PARKING RESTRICTIONS. Only such trucks and equipment as are necessary for the construction of this project will be permitted to stop or park on the shoulders or right-of-way of the highway trucks or equipment so stopped or parked shall be at least 1.2 m (4 feet) from the edge of the thru traffic lanes. Parking or stopping on the traveled portion of the roadway will not be permitted unless authorized by the Engineer to meet field conditions.

Private automobiles of workers will not be permitted to stop or park on the shoulders or right-of-way of the highway.

Each of the Contractor's trucks or equipment used for the construction of this project and permitted to park or stop as provided above shall be equipped with flashing light signals on the front and rear and the signals shall be operating at all times when parked or stopped on the highway unless otherwise authorized by the Engineer.

The flashing light signals shall be visibly distinct from and physically separate from the hazard warning system required by Federal and State motor vehicle laws and regulations. At least one of these flashing light signals shall be visible to traffic approaching from any angle at all times.

Qualified traffic control personnel shall be employed whenever the Contractor's vehicles or equipment (including that which belongs to the individual workers) enter or leave the traffic flow. All movement, in or out of the traffic flow, shall be with the flow of traffic.

20. SPECIAL CONSTRUCTION REQUIREMENTS.

A. Unless otherwise permitted in writing by the Engineer, and except as otherwise allowed under Special Provision No. 12(a), the Contractor shall not work during the holiday periods for Memorial Day and July Fourth. The Engineer shall give a written order designating the time of observance of these holidays and of any additional holidays required by the season, anticipated traffic, and local custom. As specified in Subsection 105.14, and except as otherwise allowed under Special Provision No. 12(a), construction operations shall not be performed on any Sunday without the specific authorization of the Engineer.

Designated holiday periods shall begin at 12:00 noon on the day before the weekend or holiday, whichever applies, and shall end at 7:00 a.m. on the day after the holiday or the weekend, as appropriate.

B. The Contractor shall maintain a safe access to all drives and intersecting side roads at all times during the construction of this project.

C. Two-way radios shall be provided by the Contractor when requested by the Engineer for use by traffic control personnel. All costs for furnishing and using two-way radios will not be paid for directly, but will be considered incidental to Contract item 641.10.

D. The Contractor shall have available on the project the current editions of the Manual on Uniform Traffic Control Devices (MUTCD) and the Standard Highway Signs and Markings (SHSM) Book. Information for obtaining these publications may be found at: http://mutcd.fhwa.dot.gov/index.htm.

ASPHALT PRICE ADJUSTMENT

21. SUPPLEMENTAL SPECIFICATION - ASPHALT PRICE ADJUSTMENT, dated April 6, 2010, is hereby made a new Subsection of the Specifications, superseding all previous editions and their modifications.

22. SUPPLEMENTAL SPECIFICATION - ASPHALT PRICE ADJUSTMENT, dated April 6, 2010, GENERAL REQUIREMENTS AND CONDITIONS, part (b) text, is hereby modified by being deleted in its entirety and replaced with text "NOT USED".

The index price for asphalt cement is $600.00 per ton.

In addition to materials produced under Contract pay item(s) as allowed in GENERAL REQUIREMENTS AND CONDITIONS, part (a) of the Supplemental Specification, asphalt cement produced under Contract item 900.680 Special Provision (Bituminous Concrete Pavement, Small Quantity) will be included for adjustment.

If an emulsified asphaltic liquid is used in the Contract work under any Contract item subject to the Asphalt Price Adjustment provisions and that liquid is not included in the table under subpart (5) of PRICE ADJUSTMENT PROCEDURES of the Supplemental Specification, the ACEA as defined in subpart (5) for that liquid will be that as determined by averaging Contractor certified test results for the project.

SECTION 105 - CONTROL OF THE WORK

23. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby modified by deleting the second paragraph in its entirety.

24. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby further modified by deleting the first sentence of the third paragraph.

25. 105.03 PLANS AND WORKING DRAWINGS, part (a) Contract Plans, is hereby still further modified by adding the phrase "in an accessible format" at the end of the third paragraph.

SECTION 108 - PROSECUTION AND PROGRESS

26. 108.11 DETERMINATION OF EXTENSION OF CONTRACT TIME FOR COMPLETION, part (b) Determination of Contract Completion Date Extension, is hereby modified by adding new subpart (11) as follows:

(11) The days from April 15th to December 1st, inclusive, on which the weather or condition of the ground caused suspension of the work.

SECTION 490 - SUPERPAVE BITUMINOUS CONCRETE PAVEMENT

27. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby modified by deleting the fourth row (for "Dust Proportion") in its entirety and replacing it with the following:

Dust Proportion (Filler/Asphalt Ratio)	0.60 - 1.20 (Wet Sieve) (Dry Sieve for Production - Types IS and IIS: 0.50 - 1.20 Types IIIS, IVS, and VS: 0.50 - 1.00)

28. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby further modified by deleting the sixth row (for "Voids in Mineral Aggregate") in its entirety and replacing it with the following:

Voids in Mineral Aggregate (VMA)%	12.5 min.	13.5 min.	14.5 min	15.5 min.	16.5 min.	17.5 min.

29. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby still further modified by deleting the ninth row (for "Voids Filled With Asphalt") in its entirety.

30. 490.03 COMPOSITION OF MIXTURE, part (b) Design Criteria, TABLE 490.03B - DESIGN CRITERIA is hereby still further modified by deleting footnotes (3), (4), and (5) in their entirety.

31. 490.03 COMPOSTION OF MIXTURE, part (b) Design Criteria, is hereby modified by deleting the heading "Voids Filled With Asphalt (VFA)" and the equation "VFA = 100 x ((VMA - V_a)/VMA)" in the second paragraph.

32. 490.03 COMPOSITION OF MIXTURE, part (c) Mix Design, is hereby modified by deleting the phrase ", and a single percentage for VFA" in the first sentence of the third paragraph.

33. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03C - PRODUCTION TESTING TOLERANCES is hereby modified by deleting the seventh (last) row (for "VFA") in its entirety.

34. 490.03 COMPOSITION OF MIXTURE, part (d) Control of Mixtures, TABLE 490.03C - PRODUCTION TESTING TOLERANCES is hereby further modified by deleting footnote 2 in its entirety.

SECTION 501 - HPC STRUCTURAL CONCRETE

35. 501.02 MATERIALS, is hereby modified by adding the following:

Where a shrinkage admixture will be used in placing concrete as allowed by the Contract Documents, the following requirements shall be met:

A shrinkage compensating admixture shall be added during the initial concrete mixing phase or as recommended by the chemical manufacturer product representative. The shrinkage compensating admixture shall be one of the products listed below. The final dosage rate will be determined by the product representative and the concrete producer. The dosage rate volume is computed into the final water/cementitious ratio.

Manufacturer: Sika Construction Product Division
Product name: - Sika Control 40
Tel.: 1-800-933-7452
Website: http://www.sikaconstruction.com/tds-cpd-SikaControl40-us.pdf

Manufacturer: The Euclid Chemical Company
Product name: Eucon SRA
Tel.: 1-800-321-7628
Website: http://www.euclidchemical.com/fileshare/ProductFiles/techdata/euconsra.pdf

Manufacturer: BASF (Master Builders)
Product name: Tetraguard AS20
Tel.: 1-800-628-9900
Website: http://www.basf-admixtures.com/NR/rdonlyres/84C7EC12-F527-44FD-A8B9-3A007609FF76/0/TETRAGUARD_AS20_DS307.pdf

Manufacturer: Grace Construction Products
Product name: Eclipse Plus
Tel.: 1-877-423-6491
Website: http://www.na.graceconstruction.com/concrete/download/EC-13B_2.pdf

SECTION 652 - EROSION PREVENTION & SEDIMENT CONTROL PLAN

36. SECTION 652 - EROSION PREVENTION & SEDIMENT CONTROL PLAN, is hereby made a new Section of the Specifications as follows:

37. 652.01 DESCRIPTION. This work shall consist of designing, furnishing, and submitting for acceptance modifications to the Contract Erosion Prevention & Sediment Control Plan (hereinto known as the EPSC Plan), becoming a co-permittee with the Agency of Transportation, State of Vermont on associated permits, monitoring the EPSC Plan using an On-Site Plan Coordinator, and maintaining the erosion prevention and sediment control measures to ensure the effectiveness of the EPSC Plan.

38. 652.02 MATERIALS. Materials required for the field work maintenance of the EPSC Plan shall meet all requirements of the appropriate Section of the VAOT Standard Specifications for Construction.

    Materials including manuals, checklists, forms, and other supporting documentation necessary to meet the requirements of these provisions and maintain compliance with associated permits shall be made available to the Engineer by the Contractor and maintained on site by the Contractor. Supporting documents associated with the requirements of General Permit 3-9020 are available upon request to ANR or from the ANR Stormwater web page. The VTrans Erosion Prevention and Sediment Control Plan Contractor Checklist and Low Risk Site Inspection Form are available from the VTrans Construction Environmental Engineer.

39. 652.03 QUALIFICATIONS. Modifications to the EPSC Plan shall be prepared and signed by a Licensed Professional Civil Engineer registered in the State of Vermont or a qualified professional in erosion prevention and sediment control, certified by CPESC, Inc. or equivalent, hereinafter called the "Preparer."

40. 652.04 EROSION PREVENTION & SEDIMENT CONTROL PLAN. The EPSC Plan, developed using a combination of structural, non-structural, and vegetative practices to adequately prevent erosion and control sedimentation, and meeting the requirements of the VTrans Erosion Prevention & Sediment Control Plan Designer Checklist (Non-Jurisdictional and Low Risk) or the Vermont Standards & Specifications for Erosion Prevention & Sediment Control based on area of disturbance and risk, has been included in the Contract Documents.

    The Contractor shall use the EPSC Plan included in the Contract and, at the onset of construction as well as throughout the duration of the project, modify it to describe changing conditions and illustrate how the criteria of the determined risk will be upheld. For Non-Jurisdictional and Low Risk projects, the Contractor shall use the VTrans Erosion Prevention and Sediment Control Plan Contractor Checklist. For Moderate Risk projects, the Contractor shall modify the Contract EPSC Plan in accordance with the General Permit 3-9020 Parts 4 through 6. If a modification to the EPSC Plan at a Low or Moderate Risk project alters any criteria of the determined risk, an updated Risk Evaluation shall be prepared.

    The Contractor may use the Agency's EPSC Plan sheet(s) as a basis for necessary modifications; however, if necessary to convey the sequential nature and phases of construction activities and associated erosion prevention and sediment control measures, several plan sheets showing successive site conditions are recommended.

All work shown in the EPSC Plan shall be included in the Contractor's CPM Progress Schedule, as required by Subsection 108.03.

41. 652.05 SUBMITTALS. Three sets of the modified EPSC Plan as well as the updated Risk Evaluation, stamped and signed by the Preparer, shall be submitted to the Construction Engineer as Construction Drawings in accordance with Section 105. Submittals shall occur after award of the Contract but not later than the Pre-Construction Conference to allow time for review by the Agency. An Acceptance Memo or comments will be provided to the Contractor within 10 working days.

The Contractor shall respond to comments as soon as possible, but not more than 10 days after the date of VTrans initial correspondence. Agency review time for response to comments will be completed within an additional 10 working days. Modifications or additions to the EPSC Plan will not be considered as an acceptable delay of the work under Subsection 108.11.

All subsequent modifications to the EPSC Plan and updates to the Risk Evaluation will be reviewed and forwarded to the ANR by the Agency as appropriate.

Construction activities for EPSC Plan modifications that do not require authorization from the ANR shall commence only after the EPSC Plan has been accepted by the Agency. Construction activities for EPSC Plan modifications that do require authorization from the ANR shall commence only after that authorization has been granted.

42. 652.06 MONITORING EROSION PREVENTION & SEDIMENT CONTROL PLAN. The Contractor shall designate a person (On-Site Plan Coordinator) who is directly responsible for the on-site implementation of the EPSC Plan. This person shall generally be on-site on a daily basis during active construction and have the authority to halt construction activities if necessary. The On-Site Plan Coordinator shall have demonstrated experience in construction practices as they relate to erosion prevention and sediment control as well as a general understanding of State and Federal environmental regulations and permits pertaining to the National Pollutant Discharge Elimination System Construction Program. The On-Site Plan Coordinator shall be proficient at reading and interpreting engineering and EPSC plans. Preference will be given to a Licensed Professional Civil Engineer registered in the State of Vermont or a qualified professional in erosion prevention and sediment control, certified by CPESC, Inc. or equivalent. The qualifications of the On-Site Plan Coordinator shall be included in the EPSC Plan. The Engineer, if not satisfied with the performance of this individual, may at any time request a replacement.

During active construction and periods of inactivity, the On-Site Plan Coordinator shall be responsible for inspections and reporting.

(a) Active Construction. Inspections shall occur once every seven calendar days and within 24 hours of the end of a storm event that results in a discharge of stormwater from the site. During the winter construction season (October 15th to April 15th, inclusive), inspections at all sites shall occur daily.

For Non-Jurisdictional and Low Risk projects, inspections shall be conducted using the Agency's EPSC Plan Inspection Report (Non-Jurisdictional and Low Risk Projects).

For Moderate Risk projects, inspections shall be conducted using the General Permit 3-9020 Inspection Report for Moderate Risk Projects referenced in the Permit and available upon award of the Contract.

Immediate action shall be taken to correct the discharges of sediment, including halting or reducing construction activities as necessary, until the discharge and/or the condition is fully corrected. Corrective actions shall be recorded on the monitoring reports and shown on the EPSC Plan. Each report shall be signed by the On-Site Plan Coordinator.

(b) Inactive Construction. Periods such as shutdown during the winter season shall require inspection and reporting of erosion prevention and sediment control measures. The Contractor shall contact the Engineer prior to conducting any inspections. The inspections shall be conducted at least once every 30 days and within 24 hours of any storm or significant snow melt event that may cause stormwater runoff to leave the construction site. The Contractor shall provide, within 24 hours, the necessary personnel, equipment, and materials to repair or correct any deficiencies identified during inspection. All deficiencies and corrective measures taken shall be documented on the reports.

Copies of all reports shall be submitted to the Engineer within 24 hours of inspection or when corrective measures were taken. Copies of all reports shall be kept on site in the Contractor's project files.

43. 652.07 MAINTENANCE OF EROSION PREVENTION & SEDIMENT CONTROL PLAN. This work shall consist of providing all labor and equipment necessary for field maintenance of erosion prevention and sediment control items in the Contract, and providing materials and labor necessary for installing, monitoring, maintaining and, where necessary, removing additional measures needed to correct deficiencies that develop during construction that lessen the performance of the EPSC Plan. Erosion prevention and sediment control measures shall be maintained by the Contractor and removed when authorized by the Engineer. The Contractor shall establish vegetation in all areas disturbed during removal of the erosion prevention and sediment control measures.

Any maintenance required due to the failure of the Contractor to follow the EPSC Plan in its accepted form shall be performed at no additional cost to the Agency.

44. 652.08 METHOD OF MEASUREMENT. The quantity of EPSC Plan to be measured for payment will be on a lump sum basis in the complete and accepted work.

The quantity of Monitoring EPSC Plan will be measured to the nearest 1/4 hour for the actual number of authorized hours spent monitoring, reviewing, and reporting on the construction site(s), including waste, borrow and staging areas or other support activities, as it relates to the EPSC Plan. Travel time and other time not spent at the construction site(s) or time not authorized will not be measured for payment (i.e. travel expenses, clerical staff time, copying, miscellaneous expenses, overhead, etc.).

The quantity of Maintenance of EPSC Plan will be on a lump unit basis for all such field maintenance provided for in the Contract, excluding waste, borrow and staging areas or other support activities.

45. 652.09 BASIS OF PAYMENT. The accepted quantity of EPSC Plan will be paid for at the Contract lump sum price. Payment will be full compensation for the initial preparation of modifications, submittals, and all incidentals necessary to complete the work. Subsequent modifications to the EPSC Plan during Construction will be considered incidental to Contract item 652.10.

Partial payments will be made as follows:

(a) The first payment of 50 percent of the lump sum price for the EPSC Plan will be paid for upon acceptance of the EPSC Plan for the entire project.

(b) The second payment of 35 percent of the lump sum price for the EPSC Plan will be made on the first estimate following the completion of 50 percent of the project.

(c) The third payment of 15 percent of the lump sum price for the EPSC Plan will be made when the project is substantially complete.

The accepted quantity of Monitoring EPSC Plan will be paid for at the Contract unit price per hour. Payment will be full compensation for performing the work specified. Payment will not be made unless a report for the monitoring is submitted to and accepted by the Engineer.

The accepted quantity of Maintenance of EPSC Plan will be paid for as specified for force account work in Subsection 109.06. Payments will be drawn against the Contract Lump Unit amount. To provide a common proposal for all bidders, the Agency has entered an amount in the proposal to become part of the Contractor's total bid. Maintenance related to material supply and disposal areas shall be performed in accordance with Subsection 105.29.

Payment will be made under:

Pay Item	Pay Unit
652.10 EPSC Plan	Lump Sum
652.20 Monitoring EPSC Plan	Hour
652.30 Maintenance of EPSC Plan (N.A.B.I.)	Lump Unit

SECTION 690 - FUEL PRICE ADJUSTMENT

46. In addition to materials produced under Contract pay item(s) included in Table 1 Pay Item Fuel Usage Factors and Quantity Thresholds as allowed under this Section, fuel usage under Contract item 900.680 Special Provision (Bituminous Concrete Pavement, Small Quantity) will be included for adjustment, utilizing the Fuel Usage Factors for item 490.30 in Table 1.

47. SECTION 690 - FUEL PRICE ADJUSTMENT is hereby made a new Section of the Specifications as follows:

48. 690.01 GENERAL REQUIREMENTS AND CONDITIONS

(a) This specification contains price adjustment provisions for fuel used on Vermont Agency of Transportation (Agency) construction projects. This price adjustment clause is being inserted in this Contract to provide for either additional compensation to the Contractor or a payment to the Agency, depending upon an increase or decrease in the average price of diesel fuel or gasoline during the construction of this project.

(b) These provisions apply to this Contract only as specified herein through the fuel usage factors set forth in Table 1. No further fuel price adjustments will be allowed under this Contract.

(c) It is understood by the Contractor that a price adjustment increase may cause the Agency to decrease the quantities of the Contract pay items subject to adjustment under these provisions. Provisions providing for decreased quantities and item cancellation in this paragraph are separate and take precedence, notwithstanding any other provisions of this Contract.

(d) No price adjustment will be paid for work performed after the Contract Completion Date, as modified by Change Order, if applicable.

(e) Price Adjustment, Fuel will be determined for a pay item if each of the following criteria is met:

(1) the pay item is included in the original awarded Contract;

(2) the original awarded Contract bid quantity for the pay item equals or exceeds the quantity threshold indicated in Table 1.

(f) Any increase in the total Contract amount due to fuel price adjustment will not be justification for an extension of time under Subsection 108.11.

In such cases that estimated quantities are used to determine estimated fuel price adjustments throughout the duration of the Contract, reconciliation of those estimated adjustments will be made upon the determination of actual final quantities and final adjustments to the total final quantity made by prorating those estimated adjustments over the applicable fuel price adjustment periods previously paid. Reconciliation of any fuel price adjustment will only be performed in those instances where the actual final quantity differs by more than five percent from the total estimated quantity. Payments owed to either the Contractor or VTrans will not be subject to any applicable interest claims.

49. 690.02 PRICE ADJUSTMENT PROCEDURES

(a) Prior to advertising for bids, Index Prices for both a gallon of diesel fuel and a gallon of gasoline will be established by the Agency using retail prices reported by the Energy Information Administration (EIA) for the New England Region. The Index Prices will be set monthly using the first EIA posting falling either on or after the 1st calendar day of that month. The Contract Index Prices will be the most recent Index Prices set by the Agency at the time of advertising for bids. These prices are included below and will be the base from which price adjustments are computed.

The index price (retail) for gasoline is $2.45 per gallon. The index price (retail) for diesel fuel is $3.29 per gallon.

(b) For the duration of the Contract, Posted Prices for both a gallon of diesel fuel and a gallon of gasoline will be established monthly by the Agency. The Posted Prices will be established in the same manner as the Index Prices.

(c) A Price Adjustment will be paid or credited for diesel fuel and/or gasoline only when the Posted Price of diesel fuel and/or gasoline increases or decreases 5 percent or more over its respective Index Price.

(d) Payment for Price Adjustment, Fuel will be based upon the quantity of fuel incorporated in the work as determined by the fuel usage factors in Table 1 of this specification for both diesel fuel and gasoline, multiplied by the algebraic difference between the Posted Price and the Index Price for either diesel fuel or gasoline, respectively.

(e) Payment for Price Adjustment, Fuel shall be computed as follows:

PA = Price Adjustment (LU in $)
IPD = Index Price, Diesel Fuel ($/gallon)
IPG = Index Price, Gasoline ($/gallon)
PPD = Posted Price, Diesel Fuel ($/gallon)
PPG = Posted Price, Gasoline ($/gallon)

FUFD = Fuel Usage Factor, Diesel Fuel (gallon/unit)
FUFG = Fuel Usage Factor, Gasoline (gallon/unit)

For PPD/IPD <= 0.95 or >= 1.05 and PPG/IPG > 0.95 and < 1.05:
PA = FUFD X Pay Item Quantity X (PPD - IPD)

For PPD/IPD > 0.95 and < 1.05 and PPG/IPG <= 0.95 or >= 1.05:
PA = FUFG X Pay Item Quantity X (PPG - IPG)

For PPD/IPD and PPG/IPG <= 0.95 or >= 1.05:
PA = [FUFD X (PPD - IPD) + FUFG X (PPG - IPG)] X Pay Item Quantity

(f) The Contract bid prices for the applicable pay items will be paid under the Contract. The price adjustment, when such adjustment is required as specified in part (c) of this Subsection, will be made subsequent to the month in which the applicable Contract work was performed and will be entered on the next bi-weekly estimate.

(g) Payment for Price Adjustment, Fuel shall be debited or credited against the Contract price (Lump Unit) bid for Price Adjustment, Fuel.

Payment will be made under:

Pay Item	Pay Unit
690.50 Price Adjustment, Fuel (N.A.B.I.)	Lump Unit

Table 1
Pay Item Fuel Usage Factors and Quantity Thresholds

Work Category	Pay Item No.	Usage Factor Units		Diesel Fuel (FUFD)		Gasoline (FUFG)		Quantity Threshold	
		Metric	English	Metric	English	Metric	English	Metric	English
Excavation	203.15	GAL/CM	GAL/CY	0.38	0.29	0.2	0.15	2,500	3,000
	203.16	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	2,000	2,500
	204.25	GAL/CM	GAL/CY	0.46	0.35	0.21	0.16	2,000	2,500
	208.30	GAL/CM	GAL/CY	0.46	0.35	0.21	0.16	1,500	2,000
	208.35	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	1,500	2,000
Borrow	203.30	GAL/CM	GAL/CY	0.38	0.29	0.20	0.15	2,500	3,000
	203.31	GAL/CM	GAL/CY	0.38	0.29	0.20	0.15	2,500	3,000
	203.32	GAL/CM	GAL/CY	0.38	0.29	0.20	0.15	2,500	3,000
Granular Backfill For Structures	204.30	GAL/CM	GAL/CY	1.31	1.00	0.21	0.16	1,200	1,500
Cold Planing, Bituminous Pavement	210.10	GAL/SM	GAL/SY	0.16	0.12	0	0	11,000	15,000
Subbase	301.25	GAL/CM	GAL/CY	1.11	0.85	0.73	0.56	750	1,000
	301.35	GAL/CM	GAL/CY	1.11	0.85	0.73	0.56	750	1,000
Reclaimed Stabilized Base	310.20	GAL/SM	GAL/SY	0.05	0.04	0	0	30,000	35,000
Pavement	406.25	GAL/T	GAL/TON	3.37	3.06	0.95	0.86	450	500
	406.27	GAL/T	GAL/TON	3.37	3.06	0.95	0.86	450	500
	490.30	GAL/T	GAL/TON	3.37	3.06	0.95	0.86	450	500
Concrete	501.32	GAL/CM	GAL/CY	0.98	0.75	0.33	0.25	750	1,000
	501.33	GAL/CM	GAL/CY	0.98	0.75	0.33	0.25	750	1,000
	501.34	GAL/CM	GAL/CY	0.98	0.75	0.33	0.25	750	1,000
Stone Fill	613.10	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	1,500	2,000
	613.11	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	1,500	2,000
	613.12	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	1,500	2,000
	613.13	GAL/CM	GAL/CY	0.51	0.39	0.24	0.18	1,500	2,000
Guardrail	621.20	GAL/M	GAL/LF	0.59	0.18	0.16	0.05	1,500	5,000
	621.205	GAL/M	GAL/LF	0.59	0.18	0.16	0.05	1,500	5,000
	621.21	GAL/M	GAL/LF	0.59	0.18	0.16	0.05	1,500	5,000
	621.215	GAL/M	GAL/LF	0.59	0.18	0.16	0.05	1,500	5,000

SECTION 900 - SPECIAL PROVISION ITEMS

HIGH PERFORMANCE CONCRETE, MASS POUR

50. DESCRIPTION. This work shall consist of furnishing and placing high performance Portland cement concrete at the locations indicated in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 501 of the Standard Specifications.

51. MATERIALS. Coarse aggregate gradation shall meet the following requirements:

COARSE AGGREGATE GRADATION REQUIREMENTS

Standard Stone Size	#467*
Min to Max	4.75 mm to 37.5 mm (3/16 inch - 1 1/2 inch)
Sieve Size	Percentage by Weight Passing
63 mm (2 1/2 inch)	--
50 mm (2 inch)	100
37.5 mm (1 1/2 inch)	95-100
25.0 mm (1 inch)	--
19.0 mm (3/4 inch)	35-70
12.5 mm (1/2 inch)	--
9.5 mm (3/8 inch)	10-30
4.75 mm (No.4)	0-5
2.36 mm (No.8)	--
1.18 mm (No.16)	--
300 µm (No.50)	--

*If blending of 2 or more stockpiles of different gradations is needed to create the #467 gradation requirement, then it shall be done with a method approved by the Structural Concrete Engineer.

52. CLASSIFICATION AND PROPORTIONING. Proportioning of High Performance Concrete, Mass Pour shall meet the following requirements:

HPC Class	Req.** Cem. Mat. kg/m^3 (lbs./cy)	Maximum Water-Cem. Mat. Ratio	Max. Slump mm (inch)	Air Content (%)	Coarse Aggregate Gradation Table	28-Day* Comp. Strength Mpa (psi)	28-Day** Modulus of Rupture Mpa (psi)
Mass Pour	335 (564)	0.49	180 (7)	7.0 ± 1.5	Above	25 (3500)	4.14 (600)

* The listed 28-day compressive strength or modulus of rupture will serve as the basis of designing or approving the concrete mix.
**If the initial trial batch indicates that the 28 day compressive strength cannot be obtained at the required cementitious content, then the Contractor may increase the cementitious content by the minimum needed to obtain the 28 day compressive strength, as proved by a successive trial batch. Permeability cylinders will not be required.

The blending proportions of the coarse aggregate stockpiles may need to be adjusted from the previously submitted and approved mix design based on the gradations to be used for the placement on that day. The Structural Concrete Engineer shall be notified as soon as possible and a new mix design submitted before or immediately after for review and approval of the proportioning change.

53. CEMENTITIOUS MATERIALS. The Contractor shall substitute a mineral admixture of either 20 percent fly ash or 25 percent ground granulated blast furnace slag (GGBFS) at a rate of 1 unit of mineral admixture for 1 unit of cement. The Contractor may also include silica fume substitution in conjunction with one of the selected mineral admixtures at a substitution rate of 24 kilograms (40 pounds) of silica fume for 24 kilograms (40 pounds) of cement. A pre-approved blended cement, cement blended with one or more mineral admixtures, may also be used.

If bagged silica fume is being used, the total number of bags for the batch shall be the least number of whole bags required - round fractional numbers of bags required down to the next whole number.

54. METHOD OF MEASUREMENT. The quantity of Special Provision (High Performance Concrete, Mass Pour) to be measured for payment will be the number of cubic meters (cubic yards) of concrete placed in the complete and accepted work, as determined by the prismoidal method using dimensions shown on the Plans or as directed by the Engineer, including the volume of superstructure precast concrete stay-in-place forms, but excluding the volume of steel or other stay-in-place forms and form filling materials. No deductions will be made for the volume of concrete displaced by steel reinforcement, structural steel, expansion joint material, scuppers, weep holes, conduits, tops of piles, scoring, chamfers or corners, inset panels of 38 mm (1 1/2 inches) or less in depth, or any pipe less than 200 mm (8 inches) in diameter.

55. BASIS OF PAYMENT. The accepted quantity of Special Provision (High Performance Concrete, Mass Pour) will be paid for at the Contract unit price per cubic meter (cubic yard). Payment will be full compensation for performing the work specified, including designing the mix, satisfactory finishing and curing, and for furnishing all forms, materials, including joint filler and bond breaker, labor, tools, admixtures, equipment, including automatic temperature recording units, trial batches, and incidentals necessary to complete the work.

The cost of heating materials and protecting the concrete against cold weather, and any additional cost for cement, will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Mass Pour).

The cost of furnishing testing facilities and supplies at the batch plant, and the setting of inserts and bench marks will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Mass Pour).

Costs for all materials, labor, and incidentals for steel or other stay-in-place forms and form filling materials will not be paid for separately, but will be considered incidental to Special Provision (High Performance Concrete, Mass Pour).

Payment will be made under:

Pay Item	Pay Unit
900.608 Special Provision (High Performance Concrete, Mass Pour)	Cubic Yard

HIGH PERFORMANCE CONCRETE, RAPID SET

56. DESCRIPTION. This work shall consist of designing, furnishing, and placing a high early strength, high performance, Portland cement concrete at the locations indicated in the Plans and as directed by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and Section 501 of the Standard Specifications.

57. MATERIALS. Materials shall meet the requirements of Subsection 501.02 and the following:

High Early Strength Portland Cement.....701.04

58. MIX DESIGN SUBMISSION CRITERIA. Concrete shall meet the following requirements:

(a) The mix shall be classified as self-consolidating concrete (SCC) mix. If the project will only be using this mix in flat work application, then the mix will be classified and tested as a conventional concrete with a slump not to exceed 9 inches.

(b) Compressive Strength.

28 day compressive strength - 5000 psi

In addition to this requirement, the Contractor shall be aware that a minimum compressive strength of 4000 psi, as determined by field-cured test cylinders, shall be achieved prior to allowing traffic on the structure.

(c) Permeability. 56 Day Permeability - 2500 coulombs (The permeability may be tested prior to 56 days but results must still be 2500 coulombs or less). Test shall be performed in accordance with Subsection 510.04(b)(6)f.

(d) Air Content. 7 ± 1.5%.

(e) Slump/Spread. The mix shall not exhibit segregation at the slump /spread being used.

(1) For SCC mix the visual stability index (VSI) shall be equal to or less than 1.

(f) Alkali-Silica Reactivity (ASR). Test shall be performed in accordance with Subsections 510.04(b)(6)g and 510.04(b)(7).

(g) The mix may contain shrinkage-compensating admixture such that there will be no separation of concrete from adjacent precast units. The Contractor shall include results for the unrestrained shrinkage test method, ASTM C 157. The maximum shrinkage allowed shall be 0.04%. Testing shall be performed by an independent lab that is CCRL accredited in AASHTO T 30 or ASTM C 1260.

(h) A proprietary concrete mix design meeting the same performance requirements may also be considered for use.

59. SUBMITTALS. A minimum of fourteen (14) calendar days prior to placement (or prior to the pre-placement meeting, if one is required), the Contractor shall submit the mix design for approval. The mix design shall be submitted to the Agency's Materials Laboratory, attention Composite Materials Engineer. Concrete under this provision shall not be placed until the mix design has been approved.

(a) Trial Batch. Twenty-one (21) to seven (7) days prior to the first placement, the Contractor shall produce and place a 2 cubic yard trial batch, as an SCC, at a location agreed upon by the Contractor and the Engineer. The purpose of this trial batch is to demonstrate that the mix is capable of producing the wet test results within the specified ranges. The Engineer shall be given a minimum notice of seven (7) days prior to the trial batch pour. The trial batch shall be poured in the presence of the Engineer and the Composite Materials Engineer. The trial batch shall be produced and poured in the same manner, estimated concrete temperature, and time frames that will occur during construction. The Contractor shall provide qualified personnel to test spread, air content, and temperature of the trial batch.

If this mix will be used in flat work application, a second trial batch will be required at the anticipated slump the Contractor will need; this trial batch will be tested for the same properties, except for the spread, where it will be for slump. If the mix will only be used in flat work application for the project, the requirement for testing the mix as an SCC will be disregarded. If the trial mix falls outside of any of the listed ranges for the testing criteria, the trial batch shall be subject to rejection.

(b) Mix Acceptance Criteria. The placed concrete will be tested for all mix design criteria as specified herein, with the exception of permeability, shrinkage, and ASR. If the test results fall outside of the specified ranges for the tested criteria, the mix shall be subject to rejection.

60. CURING CONCRETE. The method of wet curing used shall meet the requirements of Subsection 501.17. Concrete shall be wet cured until it has reached the minimum design strength as specified herein, verified by testing of field cylinders.

61. LOADING OF CONCRETE. After the concrete has been placed and the finishing operations concluded, it shall not be walked on or disturbed in any manner, including the removal of forms, until curing is complete as specified herein.

The concrete shall obtain the specified minimum design strength prior to any vehicular loading.

A portable compression testing machine calibrated in accordance with Section 5 of ASTM C 39 shall be provided by the Contractor and available on-site for cylinder testing of field-cured cylinders for construction progress. All testing and equipment shall conform to ASTM C 39. Testing shall be performed, and equipment operated by, a qualified Agency project individual(s). The individual(s) shall be trained in the operation of the machine by the owner or representative of the machine who is proficient in the operations and functions of the machine. Once the Agency individual(s) is confident in the operation and test procedure, a Materials Lab individual shall complete a proficiency check on-site of the individual(s) operating the machine, using practice cylinders, for the purpose of qualifying the individual(s).

If an independent lab is proposed to be used to test the field-cured cylinders, the Contractor shall submit documentation providing verification for the following:

(a) Calibration of the compression machine in accordance with Section 5 of ASTM C 39.

(b) Compression machine meets the requirements of ASTM C 39.

(c) Proficiency of the technician who will be performing the test methods.

The Engineer may approve barring any other unforeseen requirements. The State at any time reserves the right to perform an independent proficiency of the technician for the test methods used and review of the testing facility.

62. METHOD OF MEASUREMENT. The quantity of Special Provision (High Performance Concrete, Rapid Set) to be measured for payment will be the number of cubic meters (cubic yards) of concrete placed in the complete and accepted work, as determined by the prismoidal method using dimensions shown on the Plans or as directed by the Engineer, including the volume of precast concrete stay-in-place forms, but excluding the volume of steel or other stay-in-place forms and form filling materials. No deductions will be made for the volume of concrete displaced by steel reinforcement, structural steel, expansion joint material, scuppers, weep holes, conduits, tops of piles, scoring, chamfers or corners, inset panels of 38 mm (1 ½ inches) or less in depth, or any pipe less than 200 mm (8 inches) in diameter.

63. BASIS OF PAYMENT. The accepted quantity of Special Provision (High Performance Concrete, Rapid Set) will be paid for at the Contract unit price per cubic meter (cubic yard). Payment will be full compensation for performing the work specified, including designing the mix, satisfactory finishing and curing, and for furnishing all forms, materials, including joint filler and bond breaker, labor, tools, admixtures, equipment, including automatic temperature recording units, trial batches, and incidentals necessary to complete the work.

The cost of heating materials and protecting the concrete against cold weather, and any additional cost for cement, will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

The cost of furnishing testing facilities and supplies at the batch plant and the setting of inserts, bench marks, and bridge plaques furnished by the Agency will not be paid for separately but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

Costs for all materials, labor, and incidentals for steel or other stay-in-place forms and form filling materials will not be paid for separately, but will be considered incidental to Special Provision (High Performance Concrete, Rapid Set).

Payment will be made under:

Pay Item	Pay Unit
900.608 Special Provision (High Performance Concrete, Rapid Set)(FPQ)	Cubic Yard

CRITICAL PATH METHOD (CPM) SCHEDULE

64. DESCRIPTION. This work shall consist of preparing, submitting, and modifying Critical Path Method (CPM) construction schedule(s) for the Contract work as specified herein and as directed by the Engineer.

The Contractor is advised that its schedule and narrative, as specified herein, will be used by the Engineer to monitor project progress, plan the level-of-effort by its own work forces and consultants, and as a critical decision making tool. Accordingly, the Contractor shall ensure that it complies fully with the requirements specified herein and that its schedule(s) are both timely and accurate throughout the life of the project.

65. SUBMITTALS.

(a) Within ten (10) working days after the award of the Contract, the Contractor shall submit to the Engineer sufficient information that the CPM software it proposes to use on the Contract is fully capable of producing the specified schedules required by the Contract. The software used must be MS Project or be compatible with MS Project.

The Engineer shall notify the Contractor in writing, within seven (7) working days after the receipt of the Contractor's notification on the software, if there are any objections to the CPM software selected.

(b) No more than thirty (30) days after the award of the Contract, and no less than ten (10) calendar days prior to the start of work, the Contractor shall submit to the Engineer for acceptance a baseline construction schedule and narrative meeting the following requirements:

(1) Baseline Schedule Requirements.

a. Define a complete and logical plan that can realistically be accomplished for executing the work defined in the Contract.

b. Include sufficient activities for adequate project planning for subcontractor, third party, vendor, and supplier activities. These activities shall include Working Drawing submissions as well as provide for adequate review times.

c. Clearly show the critical path using the longest path definition and other critical elements of work.

d. Include a unique identification number for each schedule activity.

Clearly and uniquely define each activity description. Do not use descriptions referring to a percent complete of a multi-element task.

e. Define the duration of each activity.

1. Limit the maximum duration of any activity to fifteen (15) days unless otherwise accepted by the Engineer.

2. When the project contains a road closure period, the work within the closure period shall be broken down by hours instead of days. The maximum duration of each activity within the closure period shall be limited to twelve (12) hours.

f. Clearly identify the relationships tying activities together.

g. Do not have open-ended activities except for one start and one finish activity.

h. Do not have any constrained activities unless the Engineer accepts such constraints.

i. Include milestones to define significant contractual events such as Notice to Proceed, Interim Completion(s), road closures, road openings, Substantial Completion(s), and/or others as necessary.

(2) Baseline Narrative Requirements.

a. The construction philosophy supporting the approach to the work outlined in the baseline schedule. Address the reasons for the sequencing of work and describe any limited resources, potential conflicts, and/or other items that may affect the schedule and how they may be resolved.

b. Provide information on assumed resources, crew sizes, working hours, equipment, etc.

c. The justification for activities with durations exceeding fourteen (14) working days or exceeding twelve (12) hours for those activities falling within a road closure period.

d. The justification for constraints used.

e. The approach used to apply relationships between activities.

f. The project critical path and challenges that may arise associated with the critical path.

(c) The Contractor shall submit one hard copy and one electronic copy of an updated construction schedule each month during the life of the Contract up to Substantial Completion.

(1) Schedule Updates. Schedule updates shall include the following:

a. Actual start and finish dates for completed activities.

b. Actual start dates, percent complete, and remaining duration for activities in progress.

c. Projected sequences of activities for future work.

d. Revised relationships and durations for unfinished activities, if warranted.

e. A well defined critical path.

f. A narrative describing the following:

1. Work performed during the previous monthly period.

2. Problems or delays that have been experienced to date, the party responsible for the problems or delays, and the Contractor's plan to resolve the problems or bring the delayed activities back on schedule.

3. Differences between the work performed and the work planned for the period, including explanations for the deviations.

4. The current critical path of the project, explaining any changes since the last update and the impacts of these changes.

5. Potential problems that may be encountered during the next monthly period. Identify all potential problems the Agency may be party to and explain what action the Agency needs to take and the date by which time the action needs to be taken to avoid the problem.

(d) The Contractor shall participate in progress meetings at the request of the Engineer to review and discuss updated schedule information including any activity delay, remedies, coordination requirements, change orders, potential delays, and other relevant issues.

Projects with short duration road closures of fourteen (14) calendar days or less are of particular importance as the project float will be limited. The Contractor shall promptly inform the Engineer of any schedule delays or changes that occur during one of these periods.

When the Engineer requests a meeting the Contractor shall:

(1) Make available the project manager, scheduler, and appropriate field personnel.

(2) Make and record an action item list that describes who is responsible for resolving existing or pending issues and the date by which the issue needs to be resolved to avoid Contract delays.

(3) Submit a revised schedule update if necessary.

The Engineer will review the Contractor's schedule submittals and provide comments and disposition, either accepting the schedule or requiring revision and resubmittal of the schedule. The Engineer's comments may address work that has been omitted, unacceptable durations for items of work, or Contract violations. The planning, execution of the work, and the accuracy of their representation in the Contract Progress Schedule shall remain the sole responsibility of the Contractor.

The Contractor shall not be relieved of its responsibility for satisfactorily completing the work within the Contract time due to its failure to submit an acceptable project schedule. Additionally, the Contractor shall not withhold monthly or requested schedule submissions in the event that the Engineer does not provide formal review comments. The Contractor is to provide monthly updates regardless of any outstanding issues.

Failure to provide schedule updates as required under this Specification will result in a written notification from the Engineer. Upon receipt of this notification the Contractor has two (2) weeks to provide an updated schedule as required. Failure to provide an updated schedule will result in withholding of full Contract quantity payments until an updated schedule is received.

66. PROJECT FLOAT. Float belongs to the project and is a shared commodity between the Agency and the Contractor, and is not for the exclusive use or benefit of either party. The float may be claimed by whichever party first demonstrates a need for it.

67. METHOD OF MEASUREMENT. The quantity of Special Provision (CPM Schedule) to be measured for payment will be on a lump sum basis for providing project schedules and narratives in the complete and accepted work.

68. BASIS OF PAYMENT. The accepted quantity of Special Provision (CPM Schedule) will be paid for at the Contract lump sum price. Payment will be full compensation for initial preparation, submittals, modifications, resubmittals, and all incidentals necessary to complete the work. Subsequent modifications to the CPM Schedule during construction will be considered incidental to Special Provision (CPM Schedule).

Partial payments will be made as follows:

(a) The first 25% of the Contract lump sum price will be paid upon the approval of the baseline schedule and narrative.

(b) The remaining 75% of the Contract lump sum price will be pro-rated in equal amounts on a monthly basis. The time used for pro-rating will be equal to the number of months from approval of the baseline schedule to the anticipated Contract Completion Date.

Payment will be made under:

Pay Item	Pay Unit
900.645 Special Provision (CPM Schedule)	Lump Sum

INCENTIVE/DISINCENTIVE (I/D)

69. INCENTIVE/DISINCENTIVE (I/D), is hereby made a new Section of the Specifications as follows:

The payment of monies for performance under the Incentive/Disincentive (I/D) specifications contained in these Special Provisions shall be as follows:

1. For the incentive payment as described in part (c) of Special Provision No. 12, the Contractor will be paid in the next bi-weekly estimate in which the Contractor has satisfactorily met the requirements of I/D.

2. For the assessed disincentive as described in part (c) of Special Provision No. 12, the Engineer will deduct the amount due the Agency from the monies due the Contractor on the next bi-weekly estimate.

Payment will be made under:

Pay Item	Pay Unit
900.650 Special Provision (Incentive/Disincentive) (N.A.B.I.)	Lump Unit

BITUMINOUS CONCRETE PAVEMENT, SMALL QUANTITY

70. DESCRIPTION. This work shall consist of constructing one or more courses of bituminous mixture on a prepared foundation in accordance with these specifications and the specific requirements of the type of surface being placed, and in reasonably close conformity with the lines, grades, thicknesses, and typical cross sections shown on the Plans or established by the Engineer.

The work under this Section shall be performed in accordance with these provisions, the Plans, and the appropriate provisions of Section 406 or Section 490 of the Standard Specifications.

71. MATERIALS. Materials shall meet the requirements of the following Subsections:

Performance-Graded Asphalt Binder.....702.02
Emulsified Asphalt, RS-1H or CRS-1H.....702.04
Aggregate for Marshall Bituminous Concrete Pavement...704.10(a)
Aggregate for Superpave Bituminous Concrete Pavement..704.10(b)

Aggregate shall meet requirements relating to Section 406 or 490, where so specified.

The grade of PG asphalt binder used to produce bituminous concrete pavement shall be 58-28. Substitutions will be accepted based on availability where the upper end temperature value is greater than 58°C (136°F) and/or the lower end temperature value is less than -28°C (-18°F).

72. DESIGN MIX TYPES. Design mix types may be substituted based on mix availability. Allowable mix type substitutions will be accepted on a one to one thickness relationship, except as listed in Tables A and B below.

TABLE A - ALLOWABLE 40 MM (1½") MIX TYPE IVS SUBSTITUTIONS

Design ESALs (millions)	Design	Allowable Substitution	
	490.30 Superpave Bituminous Concrete Pavement	406.25 Bituminous Concrete Pavement*	406.27 Med. Duty Bituminous Concrete Pavement*
< 0.3	TYPE IVS	TYPE III	TYPE III
0.3 to < 10	TYPE IVS	TYPE III	-

*Per Section 406.

TABLE B - ALLOWABLE 90 MM (3½") MIX TYPE IIS SUBSTITUTIONS

Design ESALs (millions)	Design	Allowable Substitution	
	490.30 Superpave Bituminous Concrete Pavement	406.25 Bituminous Concrete Pavement*	406.27 Med. Duty Bituminous Concrete Pavement*
< 0.3	TYPE IIS	TYPE I	TYPE I
0.3 to < 10	TYPE IIS	TYPE I	-

*Per Section 406

73. COMPOSITION OF MIXTURE.

(a) Gradation. Gradation shall meet the requirements of Section 406 or 490, as appropriate.

(b) Design Criteria. Design Criteria shall meet the requirements of Section 406 or 490, as appropriate.

(c) Mix Design. Standard mix design will be in accordance with Subsection 490.03 with an n value of 65 gyrations. Allowable substitutions based on pre-existing approved mix designs and/or n values for intended Contract suppliers are listed in Table C below. A request for substitutions must be submitted in writing to the Engineer a minimum of 10 working days prior to production. Any substitutions from the standard mix design or mix types as detailed in the Plans shall not result in any increase in cost to the Agency.

TABLE C – ALLOWABLE SPECIFICATION SUBSTITUTIONS

Design ESALs (millions)	Acceptable Specification Substitution		
	Superpave Bituminous Concrete Pavement (Gyrations)	Bituminous Concrete Pavement* (75 Blow)	Med. Duty Bituminous Concrete Pavement* (50 Blow)
< 0.3	50	✓	✓
0.3 to < 10	65[1]	✓	-

[1]Standard mix design specification.
*Per Section 406

(d) Quality Acceptance.

(1) General. Acceptance sampling and testing will be conducted in accordance with the Agency's Quality Assurance Program as approved by FHWA. Bituminous concrete mixtures designated under these specifications will be sampled a minimum of once per day of production or 500 metric tons (sublot), or other sublot size deemed appropriate, and evaluated by the Agency for each mix type (each mix design) in accordance with the following acceptance guidelines.

(2) Acceptance Guidelines. Temperature of the bituminous mixture shall be tested using the Verified Thermometer test method and PG Asphalt Binder content determined from the batch slip. Gradation shall be tested in accordance with AASHTO T 30. Mixture volumetric properties (air voids and VMA) shall be calculated in accordance with Subsections 406.03(b) or 490.03(b), as appropriate.

(3) Non-Compliant Material.

a. Rejection by Contractor. The Contractor may, prior to sampling, elect to remove any defective material and replace it with new material at no expense to the Agency. Any such new material will be sampled, tested, and evaluated for acceptance.

b. For any non-compliant material outside the production testing tolerances contained in the applicable Table 406.03C or 490.03C, the representative material (sublot) shall be assessed a mixture pay adjustment factor, PF(mix), of (-0.200).

(e) Boxed Samples. If Agency plant inspectors are not available for daily testing and inspection functions, then box samples will be taken by the Engineer at the project site to afford verification of mixture volumetrics/properties. Boxed samples will be processed and results reported to the Engineer within ten working days of being received at the Agency Central Laboratory in Berlin, Vermont. Gradation shall be tested in accordance with AASHTO T 30. Maximum Specific Gravity shall be tested in accordance with AASHTO T 209. Boxed samples will be assessed a mixture pay adjustment factor of 0.000.

74. COMPACTION. Special Provision (Bituminous Concrete Pavement, Small Quantity) will be analyzed for density according to the procedure specified below.

The density of the compacted pavement shall be at least 92.0%, but not more than 97.0%, of the corresponding daily average maximum specific gravity for each mix type (each mix design) of bituminous mix placed during each day, or placed per bridge for any bridge project. For material that falls outside of this range, payment will be made by adjusting the daily production totals in accordance with Table D:

TABLE D - DENSITY PAY FACTORS

AVERAGE DENSITY	DENSITY PAY FACTOR, PF(d)
89.0% - 90.4%	- 0.150
90.5% - 91.9%	- 0.100
92.0% - 93.4%	0.000
93.5% - 95.4%	0.150
95.5% - 97.0%	0.000
97.1% - 98.5%	- 0.100

When the Contract allows for a pay adjustment for mat density and the Agency elects to not take cores of any pavement course, the Density Pay Factor (PF(d)) will be considered equal to 0.000.

Bridges with a length equal to, or greater than, six meters (20 feet) will be cored for analyzing density of the bridge deck pavement. The minimum number of cores (taken from the center of the travel lane) shall be two, or as directed by the Engineer. Bridges with a length less than six meters (20 feet) will not be cored. Bridge decks or approaches will not be cored within three meters (10 feet) of a bridge or construction joint.

Bridge deck core areas shall be repaired with hot bituminous mix to the satisfaction of the Engineer at no additional cost to the Agency.

The cores taken for acceptance testing will be the final cores taken for determination of densities.

When the Contract does not allow for a pay adjustment for mat density the Contractor shall, prior to performing any construction operations, submit to the Engineer for approval the proposed rolling pattern and compaction equipment to be used on the project. Random investigative cores will be taken by Agency personnel on the first day's production of any pavement course, with the exception of the leveling course, to verify effectiveness of the proposed rolling pattern and equipment.

Pending results of the investigative cores, necessary adjustments to the proposed rolling pattern and/or equipment shall be made by the Contractor to achieve densities as directed by the Engineer.

75. METHOD OF MEASUREMENT. The quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) to be measured for payment will be the number of metric tons (tons) for a lot of mixture (each type) complete in place in the accepted work (Q) as determined from the weigh tickets.

The quantities of all applicable Pay Adjustments calculated for the project will be determined as specified below.

When applicable, and when the mixture pay factor, PF(mix), for a lot of Special Provision (Bituminous Concrete Pavement, Small Quantity) is less than 0.000, the measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) placed will be multiplied by such pay factor to determine a Mixture Pay Adjustment, (PA(mix)), to the accepted tonnage placed (Q) for that lot based on the Contract bid price (B), as follows:

$$PA(mix) = PF(mix) \times Q \times B$$

When applicable, and when the density pay factor, PF(d), for a lot of Special Provision (Bituminous Concrete Pavement, Small Quantity) is less than 0.000, the measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) placed that day, or placed per bridge for any bridge project, will be multiplied by such pay factor to determine a Mat Density Pay Adjustment, (PA(d)), to the accepted tonnage placed (Q) for that lot based on the Contract bid price (B), as follows:

$$PA(d) = PF(d) \times Q \times B$$

76. BASIS OF PAYMENT. The measured quantity of Special Provision (Bituminous Concrete Pavement, Small Quantity) will be paid for at the Contract unit price per metric ton (ton). Payment shall be full compensation for furnishing, mixing, hauling, and placing the material specified and for furnishing all labor, tools, equipment, and incidentals necessary to complete the work.

Payment for Pay Adjustments shall be debited against the Contract prices (Lump Units) bid for the Pay Adjustment items.

The cost of repairing bridge deck core areas will not be paid for separately, but will be considered incidental to Special Provision (Bituminous Concrete Pavement, Small Quantity).

The costs of furnishing testing facilities and supplies at the plant will be considered included in the Contract unit price of Special Provision (Bituminous Concrete Pavement, Small Quantity).

The costs of obtaining, furnishing, transporting, and providing the straightedges required by Subsection 406.16 or Subsection 490.16, as appropriate, will be paid for under the appropriate Section 631 pay item included in the Contract.

The costs associated with obtaining samples for acceptance testing will be incidental to the cost of Special Provision (Bituminous Concrete Pavement, Small Quantity).

When not specified as items in the Contract, the costs of cleaning and filling joints and cracks, sweeping and cleaning existing paved surfaces, the emulsified asphalt applied to tack these surfaces, and tacking of manholes, curbing, gutters, and other contact surfaces will not be paid for directly, but will be incidental to Special Provision (Bituminous Concrete Pavement, Small Quantity).

Special Provision (Bituminous Concrete Pavement, Small Quantity) mixture approved by the Engineer for use in correcting deficiencies in the base course constructed as part of the Contract will not be paid for as Special Provision (Bituminous Concrete Pavement, Small Quantity), but will be incidental to the Contract item for the specified type of base course.

Special Provision (Bituminous Concrete Pavement, Small Quantity) mixture used to correct deficiencies in an existing pavement or to adjust the grade of a bituminous concrete surface completed under the Contract will be paid for at the Contract unit price for Special Provision (Bituminous Concrete Pavement, Small Quantity).

Payment will be made under:

Pay Item	Pay Unit
900.650 Special Provision (Mat Density Pay Adjustment, Small Quantity)(N.A.B.I.)	Lump Unit
900.650 Special Provision (Mixture Pay Adjustment) (N.A.B.I.)	Lump Unit
900.680 Special Provision (Bituminous Concrete Pavement, Small Quantity)	Ton

Minimum Labor and Truck Rates
Under Title 19, Vermont Statutes
Annotated Section 18, as amended

STATE OF VERMONT
AGENCY OF TRANSPORTATION
MONTPELIER

FOR OTHER THAN FEDERAL-AID. In accordance with the provisions of Title 19, VSA, Section 18, the following minimum rate for labor shall apply to this project:

The minimum wage for common labor will not be less than the State or Federal minimum wage, whichever is higher.

ON FEDERAL-AID PROJECTS ONLY.

The minimum rates for labor for Federal-Aid Projects shall be those set in the Wage Determination Decision of the U.S. Secretary of Labor for each project in accordance with the Federal-Aid Highway Act of 1956. When such wage rates are required they shall be included in the proposal. In the event these rates are lower than the Vermont rates, the Vermont rates shall prevail.

TRUCK RATES. In accordance with the provisions of Title 19, VSA, Section 18, the following minimum rates for trucks shall apply to this project:

Trucks, not Including Driver Water Level Body Capacity	Minimum Rates Per YD per Hr.
Trucks, Equipment Loaded	$1.65

State of Vermont
Agency of Transportation

March 2011
CA-110

DISADVANTAGED BUSINESS ENTERPRISE (DBE) POLICY CONTRACT REQUIREMENTS

Disadvantaged Business Enterprise (DBE) Policy. It shall be the policy of the Vermont Agency of Transportation (VTrans) to ensure nondiscriminatory opportunity for Disadvantaged Business Enterprises (DBEs) to participate in the performance of all contracts and subcontracts financed with Federal funds as specified by the regulations of the United States Department of Transportation (USDOT), Federal Highway Administration and as set forth below.

1. **Policy.** It is the policy of USDOT that DBEs as defined in 49 Code of Federal Regulation (CFR) Part 26 shall have the maximum opportunity to participate in the performance of contracts financed in whole or in part with Federal funds. Consequently, the DBE requirements of 49 CFR Part 26 and 23 CFR, Chapter 1, Part 230, Subpart b apply to this contract.

2. **DBE Obligation.** The State and its Contractors agree to ensure that DBEs as defined in 49 CFR Part 26, have the maximum opportunity to participate in the performance of contracts and subcontracts financed in whole or in part with Federal funds. **Each subcontract the prime contractor signs with a subcontractor must include this assurance:** *The contractor, sub recipient or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the award and performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of USDOT-assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy, as VTrans deems appropriate.*

3. **Sanctions for Noncompliance.** The Contractor is hereby advised that failure of the Contractor, or any Subcontractor performing work under this contract, to carry out the requirements set forth in paragraphs 1 and 2 above shall constitute a breach of contract and after the notification of the Vermont Agency of Transportation, Secretary of Transportation, may result in termination of this contract by the State or such remedy as the State deems necessary.

4. **Inclusion in Subcontracts.** The Contractor shall insert in each of its subcontracts this Disadvantaged Business Enterprise (DBE) Policy and also a clause requiring its subcontractors to include this same Policy in any lower tier subcontracts which they may enter into, together with a clause requiring the inclusion of the Policy in any further subcontract that may in turn be made. This Policy shall not be incorporated by reference.

Disadvantaged Business Enterprise (DBE) Program Goals. The Vermont Agency of Transportation (VTrans) is required to set an overall DBE goal for participation in all transportation related Federal-aid projects. The goal is determined following guidelines set forth in 49 CFR 26.45, and based on the availability of ready, willing and able DBEs who submitted bids and quotes for transportation related projects, compared as a percentage of all available contractors who submitted bids and quotes for transportation related projects during the same time period. The DBE goal may be adjusted to take into account other factors impacting DBE utilization, in an effort to narrowly tailor the overall DBE goal. The detailed goal setting methodology and current overall DBE goal may be viewed on the VTrans website at: http://www.aot.state.vt.us/CivilRights/DBEGoals.htm .

VTrans currently utilizes a race/gender neutral policy to fulfill its overall DBE goals, and relies on the voluntary participation of contractors to utilize certified DBEs on every project sufficient to obtain the Agency's overall DBE goal. In order for this practice to continue, contractors must be proactive and solicit bids and quotes from certified DBEs for use when submitting their own bids, and employ certified DBEs when participating on transportation related projects. Otherwise, VTrans may have to implement specified contract goals on projects to ensure the overall DBE goals are met. VTrans may include specific DBE contract goals in certain cases to ensure DBE participation, if failure to obtain the project DBE goal would negatively impact the Agency's overall DBE goal because of the size of the contract.

Disadvantaged Business Enterprise (DBE) Definition. A DBE is defined as a business that is owned and controlled by one or more socially and economically disadvantaged person(s). For the purposes of this definition:

(1) "Socially and economically disadvantaged person" means an individual who is a citizen or lawful permanent resident of the United States and who is a Woman, Black, Hispanic, Portuguese, Native American, Asian American, or a member of another group, or an individual found to be disadvantaged by the Small Business Administration pursuant to Section 3 of the Small Business Act.

(2) "Owned and controlled" means a business which is:

a. A sole proprietorship legitimately owned and controlled by an individual who is a disadvantaged person.

b. A partnership, joint venture or limited liability company in which at least 51% of the beneficial ownership interests legitimately is held by a disadvantaged person(s).

c. A corporation or other entity in which at least 51% of the voting interest and 51% of the beneficial ownership interests legitimately are held by a disadvantaged person(s).

The disadvantaged group owner(s) or stockholder(s) must possess control over management, interest in capital, and interest in earnings commensurate with percentage of ownership. Disadvantaged participation in a joint venture must also be based on the sharing of real earnings, as above. If the disadvantaged group ownership interests are real, substantial and continuing and not created solely to meet the requirements of the program, a firm is considered a bona fide DBE.

Certified DBE Directory. The current Vermont Unified Disadvantaged Business Enterprise (DBE) Directory is available online at: http://www.aot.state.vt.us/CivilRights/DBEDirectory.htm . This directory contains all currently certified DBEs available for work in Vermont, and is updated continuously. Only firms listed in this directory are eligible for DBE credit on Vermont Federal-aid projects. If you have questions about DBE certification, or do not have access to the Internet, please call the DBE Program Manager at (802) 828-5858 for assistance.

Counting DBE Participation Towards Project Goals. In order for payments made to DBE contractors to be counted toward DBE goals, the DBE contractors must perform a commercially useful function (CUF). The DBE must be responsible for execution of the work of the contract and must carry out its responsibilities by actually performing, managing, and supervising the work involved, consistent with standard industry practices.

This means that:

- The DBE must also be responsible for ordering its own materials and supplies, determining quantity and quality, negotiating price, installing (where applicable) and paying for the material itself;
- The DBE must perform work commensurate with the amount of its contract;
- The DBE's contribution cannot be that of an extra participant or a conduit through which funds are passed in order to obtain the appearance of DBE participation;
- The DBE must exercise responsibility for at least fifty percent of the total cost of its contract with its own workforce;
- None of the DBE's work can be subcontracted back to the prime contractor, nor can the DBE employ the prime's or other subcontractor's supervisors currently working on the project;
- The DBE's labor force must be separate and apart from that of the prime contractor or other subcontractors on the project. Transferring crews between primes, subcontractors, and DBE contractors is not acceptable;
- The DBE owner must hold necessary professional or craft license(s) or certification(s) for the type of work he/she performs on the project;
- The DBE may rent or lease, at competitive rates, equipment needed on the project from customary leasing sources or from other subcontractors on the project.

Allowable credit for payments made to DBEs for work performed. A contractor may take credit for payments made to a certified DBE that satisfies CUF requirements at the following rate:

- A DBE Prime Contractor: Count 100% of the value of the work performed by own forces, equipment and materials towards the DBE goals.

- An approved DBE subcontractor: Count 100% of the value of work performed by the DBE's own forces, equipment and materials, excluding the following:

    - The cost of materials/supplies purchased from a non-DBE Prime Contractor.

    - The value of work provided by non-DBE lower tier subcontractors, including non-DBE trucking to deliver asphalt to a DBE contractor.

- A DBE owner-operator of construction equipment: Count 100% of expenditures committed.

- A DBE manufacturer: Count 100% of expenditures committed. The manufacturer must be a firm that operates or maintains a factory or establishment that produces on the premises the materials or supplies obtained by the Contractor.

- A regular DBE dealer/supplier: Count 60% of expenditures committed. A regular dealer/supplier is defined as a firm that owns, operates, or maintains a store, warehouse or other establishment, in which the materials or supplies required for the performance of the contract are bought, kept in stock, and regularly sold or leased to the public in the usual course of business. A person may be a dealer in such bulk items as petroleum products, steel, cement, gravel, stone or asphalt without owning, operating or maintaining a place of business, if the person both owns and operates distribution equipment for the products, by the means of a long term agreement, and not by a contract by contract basis.

- A DBE broker: Count for DBE credit only the fees or commissions charged for assistance in the procurement, and, fees and transportation charges for the delivery of materials or supplies required at the job site, but not the cost of materials procured. A broker is defined as any person(s) or firm who arranges or expedites transactions for materials or supplies, and does not take physical possession of the materials or supplies at their place of business for resale.

- A DBE renter of construction equipment to a contractor: Count 20% of expenditures committed, with or without operator.

- A bona fide DBE service provider: Count 100% of reasonable fees or commissions. Eligible services include professional, technical, consultant, or managerial, services and assistance in the procurement of essential personnel, facilities, equipment, materials or supplies required for the performance of the contract. Eligible services also include agencies providing bonding and insurance specifically required for the performance of the contract.

- A trucking, hauling or delivery operation: Count 100% of expenditures committed when trucks are owned, operated, licensed and insured by the DBE and used on the contract and, if applicable, includes the cost of the materials and supplies. 100% of expenditures committed when the DBE leases trucks from another DBE firm including an owner-operator. 100% of reasonable fees, or commissions, the DBE receives as a result of a lease arrangement for trucks from a non-DBE, including an owner-operator.

- Any combination of the above.

Removal of Approved DBE From Transportation Related Project. Contractors may not terminate for convenience, any approved DBE subcontractor and perform the work with their own forces, without prior written consent from the VTrans DBE Program Manager or VTrans Chief of Civil Rights.

Federal-aid projects which specify a DBE contract goal. The provisions of the Vermont Agency of Transportation Supplemental Specification – Disadvantaged Business Enterprise (DBE) Utilization (CA 160) shall apply to all VTrans Federal-aid projects which specify a DBE contract goal.

Compliance With Prompt Payment Statute. In accordance with Vermont's Prompt Payment Act and VTrans Standard Specifications for Construction, Section 107.01(g), the Contractor shall fully comply with the provisions of 9 V.S.A. Chapter 102, also referred to as Act No. 74 of 1991 or the Prompt Payment Act, as amended.

Subcontractor Payments. In accordance with VTrans Standard Specifications for Construction, Section 107.01(h), on all federal-aid and state funded contracts, the Contractor, during the life of the Contract and on a monthly basis, shall submit electronically, a listing of payments to subcontractors on the form specified by the State and made available at: http://apps.vtrans.vermont.gov/dbe/. Electronic reports shall be filed with the Agency Office of Civil Rights by an authorized representative and received in the Agency Office of Civil Rights on or before the tenth working day after month end. Contractors without access to the internet shall obtain and submit manual reports to the Agency Office of Civil Rights. Manual reports shall be signed by an authorized representative, sent to the Agency Office of Civil Rights, and postmarked on or before the tenth working day after month end. There shall be no direct compensation allowed the Contractor for this work, but the cost thereof shall be included in the general cost of the work. In accordance with 9 V.S.A. Section 4003, notwithstanding any contrary agreement, payments made to subcontractors after seven days from receipt of a corresponding progress payment by the State to the Contractor, or seven days after receipt of a subcontractor's invoice, whichever is later, violate this agreement. Violations shall be reported to the Agency Office of Civil Rights for review. Failure to resolve disputes in a timely manner may result in a complaint made to the Agency Pre-qualification Committee. In this Committee's judgment, appropriate penalties may be involved for failure to comply with this specification. Penalties may include suspension, reduction or revocation of the Contractor's pre-qualification rating. This clause shall be included in the prime Contractor's Contract made with all if its subcontractors.

General Decision Number: VT140034 01/03/2014 VT34

Superseded General Decision Number: VT20130034

State: Vermont

Construction Type: Highway

County: Addison County in Vermont.

HIGHWAY CONSTRUCTION PROJECTS (excluding tunnels; building structures in rest areas; railroad construction; bascule, suspension & spandrel arch bridges; bridges designed for commercial navigation; bridges involving marine construction; and other major bridges)

Modification Number	Publication Date
0	01/03/2014

* SUVT2011-019 09/14/2011

	Rates	Fringes
CARPENTER, Includes Form Work....	$ 17.11	1.79
CEMENT MASON/CONCRETE FINISHER...	$ 25.34	0.00
ELECTRICIAN, Includes Installation of Traffic Signals.....	$ 23.32	0.00
GUARDRAIL INSTALLER.....	$ 12.93	0.00
IRONWORKER, REINFORCING.....	$ 16.03	2.39
IRONWORKER, STRUCTURAL.....	$ 21.15	15.54
LABORER: Common or General Includes Asphalt Raker and Concrete Work.....	$ 13.18	2.52
LABORER: Flagger.....	$ 11.05	2.20
LABORER: Landscape.....	$ 12.31	1.03
LABORER: Screedman.....	$ 16.30	4.23
LABORER: Sign Erector/Installer.....	$ 14.31	4.70
OPERATOR: Asphalt Roller.....	$ 18.27	5.16
OPERATOR: Backhoe.....	$ 18.99	1.64
OPERATOR: Bobcat/Skid Steer/Skid Loader.....	$ 18.03	0.00
OPERATOR: Broom.....	$ 16.88	3.72

OPERATOR: Bulldozer	$ 19.18	2.56
OPERATOR: Cold Planer/Milling Machine	$ 18.66	0.00
OPERATOR: Crane	$ 20.00	2.13
OPERATOR: Excavator	$ 18.99	1.36
OPERATOR: Grader/Blade	$ 18.44	3.50
OPERATOR: Loader	$ 19.20	4.35
OPERATOR: Mechanic	$ 20.45	0.00
OPERATOR: Paver	$ 17.55	4.44
OPERATOR: Pounder	$ 18.11	0.00
OPERATOR: Roller excluding Asphalt	$ 16.94	5.34
OPERATOR: Screed	$ 17.52	3.99
OPERATOR: Sweeper	$ 24.44	12.24
PAINTER (Parking Lot and Highway Striping Only)	$ 16.39	3.56
TRUCK DRIVER, Includes all axles including Dump Trucks	$ 16.07	2.80
TRUCK DRIVER: Distributor Truck	$ 17.89	0.00
TRUCK DRIVER: Semi/Trailer Truck	$ 14.72	4.39

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of "identifiers" that indicate whether the particular rate is union or non-union.

Union Identifiers

An identifier enclosed in dotted lines beginning with characters other than "SU" denotes that the union classification and rate have found to be prevailing for that classification. Example: PLUM0198-005 07/01/2011. The first four letters , PLUM, indicate the international union and the four-digit number, 0198, that follows indicates the local union number or district council number where applicable , i.e., Plumbers Local 0198. The next number, 005 in the example, is an internal number used in processing the wage determination. The date, 07/01/2011, following these characters is the effective date of the most current negotiated rate/collective bargaining agreement which would be July 1, 2011 in the above example.

Union prevailing wage rates will be updated to reflect any changes in the collective bargaining agreements governing the rates.

0000/9999: weighted union wage rates will be published annually each January.

Non-Union Identifiers

Classifications listed under an "SU" identifier were derived from survey data by computing average rates and are not union rates; however, the data used in computing these rates may include both union and non-union data. Example: SULA2004-007 5/13/2010. SU indicates the rates are not union majority rates, LA indicates the State of Louisiana; 2004 is the year of the survey; and 007 is an internal number used in producing the wage determination. A 1993 or later date, 5/13/2010, indicates the classifications and rates under that identifier were issued as a General Wage Determination on that date.

Survey wage rates will remain in effect and will not change until a new survey is conducted.

WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter? This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour Regional Office for the area in which the survey was conducted

because those Regional Offices have responsibility for the Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations
Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

END OF GENERAL DECISION

SUPPLEMENTAL SPECIFICATION
ASPHALT PRICE ADJUSTMENT

GENERAL REQUIREMENTS AND CONDITIONS

(a) This specification contains price adjustment provisions for asphalt cement and emulsified asphalt used on Vermont Agency of Transportation (Agency) construction projects and produced under Sections 303, 404, 406, 415, and 490 of the Standard Specifications, or as otherwise designated in the Contract Documents. This price adjustment clause is being inserted in this Contract to provide for either additional compensation to the Contractor or a payment to the Agency, depending upon an increase or decrease in the average price of asphalt cement during the construction of this project.

(b) Emulsified asphalt shall be subjected to a correction factor of 0.45, applied to the quantity of material supplied. This corrected quantity shall be used for Asphalt Price Adjustment as specified and computed herein.

(c) These provisions apply to this Contract only as specified in the procedures provided herein. No further asphalt cement and/or emulsified asphalt price adjustments will be allowed under this Contract.

(d) It is understood by the Contractor that a price adjustment increase may cause the Agency to decrease the quantities of the Contract pay items subject to adjustment under these provisions. Provisions providing for decreased quantities and item cancellation in this paragraph are separate and take precedence, notwithstanding any other provisions of this Contract.

(e) No price adjustment will be allowed beyond the Contract Completion Date or any applicable interim completion dates.

(f) Any increase in the total Contract amount due to price adjustment under these provisions will not be justification for an extension of time under Subsection 108.11.

(g) The Contractor hereby agrees that its bid prices for this Contract include no allowances for any contingencies to cover increased costs for which adjustment is provided herein.

PRICE ADJUSTMENT PROCEDURES

(1) Prior to advertising for bids, an Index Price for asphalt cement will be established by the Agency upon consideration of the New York State DOT average monthly price for asphalt cement, or other monthly index deemed appropriate by the Director of Finance and Administration. The Index Price will be set monthly on or about the last day of the month. The Contract Index Price will be the most recent Index Price set by the Agency at the time of advertising for bids. This price will be as specified in the Special Provisions and will be the base from which price adjustments are computed.

(2) For the duration of the Contract, Posted Prices for a metric ton (ton) of asphalt cement will be established monthly by the Agency. The Posted Prices will be established in the same manner as the Index Price.

(3) A Price Adjustment will be paid or credited for asphalt cement only when the Posted Price of asphalt cement increases or decreases over its respective Index Price.

(4) The Price Adjustment will be based upon the quantity of asphalt cement (QAC) and quantity of emulsified asphalt (QEA) incorporated in the work, determined as follows:

a. Batch Plants. QAC is determined using the cumulative actual binder content for each applicable item as reported on the batch ticket, excluding any percent of asphalt cement from Recycled Asphalt Pavement (RAP).

b. Drum-Mix Plants. QAC is determined based upon the metric tons (tons) of mix placed, multiplied by the actual binder content reported on the demand tickets, as verified by Agency personnel. In the event of multiple binder contents, the accepted quantity of mix at each binder content shall be determined, and the total QAC used shall be calculated accordingly. The accumulated asphalt cement total on the plant automation may be checked and verified by Agency personnel for each mix.

c. Emulsified Asphalt. QEA is as determined in accordance with Subsection 404.11.

(5) The Price Adjustment to be paid shall be computed as follows:

PA = [(QAC + (ACEA X 0.001 X QEA)) X (PP - IP)] [Metric]

PA = [(QAC + (ACEA X 0.05 X QEA)) X (PP - IP)] [English]

where:

PA = Price Adjustment (LU in $)
IP = Index Price ($/metric ton) or ($/ton)
PP = Posted Price on date of work ($/metric ton) or ($/ton)
QAC = Quantity of Asphalt Cement (metric tons) or (tons)
QEA = Quantity of Emulsified Asphalt (kilograms) or (CWT)
ACEA = Asphalt Content of Emulsified Asphalt as follows:

Emulsified Asphalt Type	ACEA
CSS-1h	0.57
MS-1	0.55
RS-1	0.55
CRS-1p	0.63
CSS-1h Fog	0.28

(6) The Contract bid prices for the applicable pay items will be paid separately under the Contract. The price adjustment will be calculated and paid in the same bi-weekly estimate as the applicable Contract work.

(7) Payments for Price Adjustment, Asphalt Cement shall be debited or credited against the Contract price (Lump Unit) bid for Price Adjustment, Asphalt Cement.

Payment will be made under:

Pay Item	Pay Unit
406.50 Price Adjustment, Asphalt Cement (N.A.B.I.)	Lump Unit

Brady, James

From: Title 19 [DII-SharePointAdmins@state.vt.us]
Sent: Tuesday, November 05, 2013 12:04 PM
To: Slesar, Chris; Goldstein, Lee; Ramsey, Jeff; Brady, James
Cc: Lofgren, Matt; Mackenzie, Chet; Brunelle, Chris
Subject: LincolnBRF0188(8) - Title 19 Review

Do not reply to this email.

Project LincolnBRF0188(8) had been approved by, Chris Brunelle 802-777-5328. The following Standard Conditions apply:

Title-19 Standard Conditions:

1. A) The project shall be constructed as defined in the documents linked to the LincolnBRF0188(8) project in this Title 19 Share Point site. B) Any amendment to the plans which in any way affects surface waters and/or riparian corridors shall be reviewed by this office and approval received by VTrans prior to construction. C) Any construction modifications that deviate from the approved plans which in any way affects surface waters and/or riparian corridors shall be reviewed by this office and approval received by VTrans prior to the construction activity.
2. That the contractor's schedule of accomplishment of water quality related work to be submitted prior to the start of construction, and as required under general specification #105.23(a) shall include site-specific methods of operation. Temporary construction fills, check dams, silt barriers and other erosion control works shall be described and shown on pertinent plans.
3. That the Vermont Agency of Transportation general specification #105.23 addressing the control of erosion and siltation be carefully adhered to in order to minimize turbidity and other adverse impacts.
4. That the Vermont Agency of Transportation general specification #105.24 addressing pollution control be carefully followed in order to limit, if not prevent altogether, the discharge of fuel, grease, oil, raw concrete, paint, chemicals, and debris to any waters of the state.
5. An on-site pre-construction conference between the contractor, VTrans Resident Engineer and the River Management Engineer (Chris Brunelle) shall be held prior to commencement of any in-stream construction. Please contact the ANR River Management Engineer listed at the top of this email to schedule the conference.
6. Approved in-stream working dates on this project are from 6/1-10/1. Contractor proposals for construction activities in or adjacent to flowing water during the restricted period must be isolated from stream flow and must receive prior approval from the River Management Engineer.
7. The provisions of this approval shall be made a part of the construction contract.

Project GUID: {A233829D-091E-4C05-B3CE-78F42DE42158}

VERMONT

Vermont Department of Environmental Conservation
Watershed Management Division
Main Building, Second Floor
One National Life Drive
Montpelier, VT 05620-3522

Agency of Natural Resources

[phone] 802-828-1535

The Notice of Intent for the discharge of stormwater runoff from Low Risk Construction Activity under Construction General Permit (CGP) 3-9020 (Amended 2008) has been authorized. Enclosed are four documents that you will need to maintain compliance with this authorization.

1. Authorized Notice of Intent (NOI)
The authorized NOI for Low Risk Projects is valid for two years from the date of the authorization. If the project will proceed past the automatic termination date, you must reapply for coverage under this or another construction stormwater permit before that time.

2. Notice of Authorization for Posting
The notice of Authorization, which details the authorization and conditions you selected in completion of Appendix A to the CGP, must be posted in a location visible to the public in accordance with Subpart 4.5.C of the CGP. In accordance with subpart 5.1 of the CGP, the project risk score must be re-evaluated prior to any major changes to the construction plan.

3. Low Risk Site Handbook for Erosion Prevention and Sediment Control
Please provide the Principal Operator with the low risk site handbook. This handbook details the practices that must be implemented throughout the construction project to prevent erosion and the discharge of sediment from the construction site. Some practices must be in place before construction begins, so please review the entire handbook before starting the project.

4. Notice of Addition of Co-Permittee
This form must be submitted for every new landowner or principal operator who joins the project, in accordance with Subpart 7.2 of the CGP.

The CGP, copies of pertinent forms, and an electronic version of the Low Risk Site Handbook for Erosion Prevention and Sediment Control are available on the stormwater website at: http://www.vtwaterquality.org/stormwater/htm/sw_cgp.htm. If you have any questions related to your authorization, please contact the appropriate analyst in the Stormwater District where your project is located. Use our District Look-up Tool for details.

Sincerely,

Stormwater Management Program

Cc: Co-Permittee/Application Preparer/Designer (if applicable)

Print Form

Received January 15, 2014

Notice of Intent (NOI)

for Stormwater Discharges Associated with Construction Activity on

Low Risk Sites

Under Vermont Construction General Permit 3-9020

For Department Use Only
NOI Number: 7136-9020

VERMONT
ENVIRONMENTAL CONSERVATION

Submission of this completed Notice of Intent (NOI) constitutes notice that the entity in Section A intends to be authorized to discharge pollutants to waters of the State, from the project identified in Section C, under Vermont's Construction General Permit (CGP). Submission of the NOI constitutes notice that the party identified in Section A of this form has read, understands, and meets the eligibility conditions of the CGP; has determined that the project qualifies for coverage as a Low Risk project in conformance with Appendix A of the CGP; agrees to comply with all applicable terms and conditions of the CGP; understands that continued authorization under the CGP is contingent on maintaining eligibility for coverage; and that all applicable practices in the Low Risk Site Handbook for Erosion Prevention and Sediment Control must be implemented and maintained for the duration of construction activities. In order to be granted coverage, all information required on this form must be provided and an application fee of $50 payable to the State of Vermont must be submitted.

A. Landowner Information

1a. Name: Vermont Agency of Transportation 1b. Contact (if applicable): James Brady

2. Mailing Address
a. Street/P.O. Box: 1 National Life Drive

b. City/Town: Montpelier c. State: Vermont d. Zip: 05633

3. Contact Information
a. Phone: 802-828-3978 b. Fax: 802-828-2334 c. Email: james.brady@state.vt.us

B. Principal Operator Information *(if known)*

1. Name:

2. Mailing Address
a. Street/P.O. Box:

b. City/Town: c. State: Vermont d. Zip:

3. Contact Information
a. Phone: b. Fax: c. Email:

C. Application Preparer Information *(if applicable)*

1a.Name: James Brady, Environmental Specialist 1b. Contact (if applicable):

2. Mailing Address:
a. Street/P.O. Box: 1 National Life Drive

b. City/Town: Montpelier c. State: Vermont d. Zip: 05633

3. Contact Information
a. Phone: 802-828-3978 b. Fax: 802-828-2334 c. Email: james.brady@state.vt.us

See Filing Directions for Low Risk Projects

Form revised June 2012

D. Project Information

1. Project Name: Lincoln BRF 0188 (8)

2a. Is this project part of a Common Plan of Development[1]? ☐ Yes ☑ No
2b. If Yes, Name of Development: _____

3a. Does this project have any previously issued or pending stormwater discharge permits? ☐ Yes ☑ No
3b. If Yes, Prior NOI Number(s): _____

4. Location Address
a. Street: East River Road b. City/Town: Lincoln
c. Latitude: 44 ° 06 ' 03 " d. Longitude: 72 ° 59 ' 26 " e. County: Addison

➲ Use DEC's Waterbody Identification (WBID) ArcGIS webpage *(click here)* to answer questions 5 and 6 below.

5. Name of receiving water(s)[2]: New Haven River 6. Include a topographic location map.

7. Project Type: ☐ Residential ☐ Commercial ☐ Industrial ☑ Other: Bridge

8. Total Area of Disturbance: 1.06 acres 9. Description of construction activities to be permitted (below):

Work to be performed under this contract includes the replacement of existing bridge with a new widened bridge on a similar alignment. Work will also include related channel and approach work along with incidental items.

E. Public Notice Requirement

You must provide a copy of this complete NOI form to the municipal clerk for posting in the municipality in which the project is located. If the project and the related discharge(s) are located in different municipalities, then the completed NOI must be filed with the municipal clerk in each municipality. The municipal clerk must post the completed NOI. In order to be considered complete, you must include the date of posting.

Date of Posting at Municipal Office(s): 01/14/2014

Information for the Municipal Clerk regarding posting instructions can be found on Page 4 of this NOI.

F. Certification Relating to the Accuracy of the Information Submitted

I hereby certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gathered and evaluated the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations. I also certify that the applicable practices in The Low Risk Site Handbook for Erosion Prevention and Sediment Control will be implemented for the duration of the project for which this NOI is submitted.

Landowner Name: Vermont Agency of Transportation Title: _____

Signature: _____ Date: _____

Principal Operator: _____ Title: _____
(if known)

Signature: _____ Date: _____

Application Preparer: James Brady Title: Environmental Specialist
(if applicable)

Signature: _____ Date: _____

[1] "Common Plan of Development" is defined within the CGP 3-9020, Appendix C – Definitions, page A-12
[2] "Waters of the State" (i.e. receiving water) is defined within the CGP 3-9020, Appendix C – Definitions, page A-16

For Department Use Only

VERMONT DEPARTMENT OF ENVIRONMENTAL CONSERVATION AUTHORIZATION TO DISCHARGE

A determination has been made that the proposed construction activities qualify for coverage under General Permit 3-9020 (amended 2008) as a Low Risk project. Subject to the conditions of General Permit 3-9020 (amended 2008) the applicant is hereby authorized to discharge stormwater runoff from a construction site as described in this Notice of Intent Number 7136 -9020.

Dated this 28th day of January, 20 14

David K. Mears, Commissioner Department of Environmental Conservation

By: Padraic Monks

Padraic Monks, Program Manager
Stormwater Program

PUBLIC COMMENT

Public comments concerning this Notice of Intent to discharge under CGP 3-9020 (amended 2008) are invited and must be submitted within 10 days of receipt of this Notice by the Municipal Clerk. Comments should address how the application complies or does not comply with the terms and conditions of CGP 3-9020 (amended 2008). A letter of interest should be filed by those persons who elect not to file comments but who wish to be notified if the comment period is extended or reopened for any reason. All written comments received within the time frame described above will be considered by the Department of Environmental Conservation in its final ruling to grant or deny authorization to discharge under CGP 3-9020 (amended 2008). Send written comments to:

Vermont Department of Environmental Conservation
Watershed Management Division, Stormwater Program
1 National Life Drive, Main Building Second Floor
Montpelier, VT 05620-3522

Please cite the NOI number in eny correspondence.

APPEALS

Renewable Energy Projects – Right to Appeal to Public Service Board
If this decision relates to a renewable energy plant for which a certificate of public good is required under 30 V.S.A. §248, any appeal of this decision must be filed with the Vermont Public Service Board pursuant to 10 V.S.A. §8506. This section does not apply to a facility that is subject to 10 V.S.A. §1004 (dams before the Federal Energy Regulatory Commission), 10 V.S.A. §1006 (certification of hydroelectric projects) or 10 V.S.A. Chapter 43 (dams). Any appeal under this section must be filed with the clerk of the Public Service Board within 30 days of the date of this decision. For further information, see the Public Service Board website at http://psb.vermont.gov or call (802) 828-2358. The address for the Public Service Board is 112 State Street Montpelier, Vermont 05620-2701.

All Other Projects – Right to Appeal to Environmental Court
Pursuant to 10 V.S.A. Chapter 220, any appeal of this decision must be filed with the clerk of the Environmental Court within 30 days of the date of the decision. The Notice of Appeal must specify the parties taking the appeal and the statutory provision under which each party claims party status; must designate the act or decision appealed from; must name the Environmental Court; and must be signed by the appellant or their attorney. In addition, the appeal must give the address or location and description of the property, project or facility with which the appeal is concerned and the name of the applicant or any permit involved in the appeal. The appellant must also serve a copy of the Notice of Appeal in accordance with Rule 5(b)(4)(B) of the Vermont Rules for Environmental Court Proceedings. For further information, see the Vermont Rules for Environmental Court Proceedings, available online at www.vermontjudiciary.org or call (802) 828-1660. The address for the Environmental Court is 2418 Airport Road, Suite 1, Barre, Vermont 05641.

A copy of CGP 3-9020 (amended 2008) may be obtained by calling (802) 828-1535; by visiting the Department at the above address between the hours of 7:45 am and 4:30 pm; or by download from the Watershed Management Division's Web site at: www.vtwaterquality.org.

INFORMATION FOR MUNICIPAL CLERK

10 V.S.A. Chapter 47 §1263(b) provides for the public notice of an applicant's intent to discharge stormwater runoff associated with construction activity. Please post this notice and instruction sheet in a conspicuous place for 10 days from the date received. If you have any questions, contact the Watershed Management Division of the Department of Environmental Conservation at (802) 828-1535.

Submit this form and the $50 fee to:

Vermont Department of Environmental Conservation
Watershed Management Division, Stormwater Program
1 National Life Drive, Main Building Second Floor
Montpelier, VT 05620-3522

Notice of Authorization

Under Vermont Construction General Permit 3-9020
For **Low Risk Projects**

VERMONT
ENVIRONMENTAL CONSERVATION

Project Name:	**Notice of Intent Number:** 7136-9020
Lincoln BRF 0188 (8)	**Date of Authorization:** January 28, 2014
Permittee Name:	
Vermont Agency of Transportation	**Date of Expiration:** January 28, 2016

The project listed above has received authorization under General Permit 3-9020 to discharge stormwater from the following construction activities:

Replacement of existing bridge with a new widened bridge on similar alignment. Work also includes related channel and approach work along with incidental items.

This authorization includes the following requirements:

1. Implementation of erosion prevention and sediment control practices required by the Low Risk Site Handbook for Erosion Prevention and Sediment Control.

2. All areas of disturbance must have temporary or final stabilization within **7 days** of the initial disturbance. After this time, all disturbed soil must be stabilized at the end of each work day. Between October 15 and April 15 all disturbed soil must be stabilized at the end of each work day. The following exceptions apply:
   a. Stabilization is not required if work is to continue in the area within the next 24 hours and there is no precipitation forecast for the next 24 hours.
   b. Stabilization is not required if the work is occurring in a self-contained excavation (i.e. no outlet) with a depth of 2 feet or greater (e.g. house foundation excavation, utility trenches).

3. No more than **2** acres of land may be disturbed at any one time.

4. Inspections shall be conducted at least once every (7) calendar days and within twenty-four (24) hours of the end of a storm event resulting in discharge of Stormwater from construction site.

5. If there is a discharge of visibly discolored stormwater from the construction site or from the construction site to waters of the State, the permittee shall take immediate corrective action.

6. If, after completing corrective action, there continues to be a discharge of sediment from the construction site to waters of the State, the permittee shall notify DEC by submitting a report within 72 hours of the discharge.

To request information on this authorization, or to report compliance concerns, please contact:

Vermont DEC, Watershed Management Division
Main Building, Second Floor
One National Life Drive
Montpelier, VT 05620-3522
(802) 828-1535

[See next page for posting requirements]

Permittee Directions for Posting:
This notice shall be placed near the construction entrance at a location visible to the public. If displaying near the main entrance is infeasible, the notice shall be posted in a local public building such as the town hall or public library. For linear projects, the notice shall be posted at a publicly accessible location near the active part of the construction project (e.g., where a pipeline project crosses a public road).

Notice of Addition
Of Owners or Operators To Coverage
Under Vermont Construction General Permit 3-9020

VERMONT
ENVIRONMENTAL CONSERVATION

Submission of this completed form constitutes notice that the entity in Section C seeks to be added as a co-permittee to an existing authorization to discharge under Vermont's Stormwater Construction General Permit (CGP) from the project identified in Section A. All landowners and persons who meet the definition of Principal Operator (Subparts 2.1B, 3.1B of the CGP) and who were not included on the original NOI must submit a Notice of Addition form.

A. Project Information
1. Project Name:_____ 2. Notice of Intent Number: _____

B. Original Permittee Information
1.Name: _____

2. Mailing Address:
a. Street/PO Box: _____

b. City/Town: _____ c. State: _____ d. Zip:_____
3. Contact Information

a. Phone: _____ b. Fax: _____ c. Email: _____

C. New Co-Permittee Information
Check one or both: ☐ New Landowner ☐ New Principal Operator

1.Name: _____

2. Business Name: _____
3. Mailing Address:
a. Street/PO Box: _____

b. City/Town: _____ c. State: _____ d. Zip:_____
4. Contact Information

a. Phone: _____ b. Fax:_____ c. Email: _____

D. Request for Addition as Co-Permittee
I hereby request that the entity in Section C be added as co-permittee to the existing authorization to discharge stormwater from construction activities stated in Section A. In requesting co-permittee status, I hereby certify under the penalty of law that I have read, understand, and meet the eligibility conditions of the CGP; that I agree to comply with all applicable terms and conditions of the CGP; that I understand that continued authorization under the CGP is contingent on maintaining eligibility for coverage, and that the applicable practices in the authorized Erosion Prevention and Sediment Control Plan must be implemented and maintained for the duration of the construction activities. I agree to comply with all applicable terms and conditions of the General Permit 3-9020.

Signature: _____ Date: _____

Submit Original Form to:
VT DEC, Watershed Management Division
1 National Life Drive, Main 2
Montpelier, VT, 05620-3522

DEPARTMENT OF THE ARMY
US ARMY CORPS OF ENGINEERS
NEW ENGLAND DISTRICT
696 VIRGINIA ROAD
CONCORD MA 01742-2761

December 12, 2013

received 12·18·13

Regulatory Division
CENAE-R-PEC-62
Permit Number: NAE-2013-2487

Mr. Glenn Gingras
Transportation Biologist
Vermont Agency of Transportation
One National Life Drive
Montpelier, Vermont 05633-5001

Dear Mr. Gingras:

We have reviewed your application to place fill in a total of 4,194 sq. ft. (0.10 acre) of the New Haven River in conjunction with the construction of a new bridge (Bridge No. 19), on existing alignment, on East River Road (TH 1) in Lincoln, Vermont. The work is shown on the attached plans, on nine sheets, entitled "LINCOLN BRF 0188 (8)", dated "7/23/2013", "10/21/2013", "10/23/2013", and "10/31/2013".

Based on the information you have provided, we have determined that the proposed activity, which includes a discharge of dredged or fill material into waters or wetlands, will have only minimal individual or cumulative environmental impacts on waters of the United States, including wetlands. Therefore, this work is authorized as a Category 2 activity under the attached Federal permit known as the Vermont General Permit (GP). This work must be performed in accordance with the terms and conditions of the GP.

You are responsible for complying with all of the GP's requirements. Please review the attached GP carefully, in particular the GP conditions beginning on Page 7, to familiarize yourself with its contents. You should ensure that whoever does the work fully understands the requirements and that a copy of the permit document AND THIS AUTHORIZATION LETTER ARE at the project site throughout the time the work is underway.

This authorization expires on December 6, 2017, unless the GP is modified, suspended, or revoked. You must commence or have under contract to commence the work authorized herein by December 6, 2017 and complete the work by December 6, 2018. If you do not, you must contact this office to determine the need for further authorization before beginning or continuing the activity.

If you change the plans or construction methods for work in our jurisdiction, please contact us immediately to discuss modification of this authorization. This office must approve any changes before you undertake them.

This authorization requires you to complete and return the enclosed Work Start Notification Form to this office before the anticipated starting date. You must also complete and return the enclosed Compliance Certification Form within one month following the completion of the authorized work.

This authorization presumes that the work as described above and as shown on your plans noted above is in waters of the U.S. Should you desire to appeal our jurisdiction, please submit a request for an approved jurisdictional determination in writing to this office.

This permit does not obviate the need to obtain other Federal, state, or local authorizations required by law, as listed on Page 2 of the GP. Performing work not specifically authorized by this determination or failing to comply with any special condition(s) provided above or all the terms and conditions of the GP may subject you to the enforcement provisions of our regulations.

We continually strive to improve our customer service. In order for us to better serve you, we would appreciate your completing our Customer Service Survey located at http://per2.nwp.usace.army.mil/survey.html

Please contact Michael S. Adams of my staff at (802) 872-2893 if you have any questions.

Sincerely,

Frank J. DelGiudice
Chief, Permits & Enforcement Branch
Regulatory Division

Attachments

Copies furnished:
Mr. Christopher G. Brunelle
VT Department of Environmental Conservation
Chris.Brunelle@state.vt.us

Ms. Jacqueline Dagesse
EIV Technical Services
jdagesse@eivtech.com

US Army Corps
of Engineers®
New England District

WORK START NOTIFICATION FORM

****
* MAIL TO: U.S. Army Corps of Engineers, New England District *
* Vermont Project Office *
* 11 Lincoln Street, Room 210 *
* Essex Junction, Vermont 05452 *
****

Corps of Engineers Permit No. NAE-2013-2487 was issued to Vermont Agency of Transportation. The permit authorized the permittee to place fill in about 4,194 sq. ft. (0.10 acre) of the New Haven River in conjunction with the construction of a new bridge (Bridge No. 19), on existing alignment, on East River Road (TH 1) in Lincoln, Vermont.

The people (e.g., contractor) listed below will do the work, and they understand the permit's conditions and limitations.

PLEASE PRINT OR TYPE

Name of Person/Firm: _____

Business Address: _____

_____

_____

Telephone Numbers: (____) _____ (____) _____

Proposed Work Dates: **Start** _____ **Finish** _____

Permittee's Signature: _____ **Date:** _____

Printed Name: _____ **Title:** _____

****

FOR USE BY THE CORPS OF ENGINEERS

PM: Michael Adams **Submittals Required:** No

Inspection Recommendation: _____

_____

_____

US Army Corps
of Engineers®
New England District

(Minimum Notice: Permittee must sign and return notification within one month of the completion of work.)

COMPLIANCE CERTIFICATION FORM

USACE Project Number: NAE-2013-2487

Name of Permittee: Vermont Agency of Transportation

Permit Issuance Date: December 12, 2013

Please sign this certification and return it to the following address upon completion of the activity and any mitigation required by the permit. You must submit this after the mitigation is complete, but not the mitigation monitoring, which requires separate submittals.

```
*****************************************************************************
* MAIL TO:  U.S. Army Corps of Engineers, New England District            *
*           Vermont Project Office                                        *
*           11 Lincoln Street, Room 210                                   *
*           Essex Junction, Vermont  05452                                *
*****************************************************************************
```

Please note that your permitted activity is subject to a compliance inspection by an U.S. Army Corps of Engineers representative. If you fail to comply with this permit you are subject to permit suspension, modification, or revocation.

I hereby certify that the work authorized by the above referenced permit was completed in accordance with the terms and conditions of the above referenced permit, and any required mitigation was completed in accordance with the permit conditions.

_____ _____
Signature of Permittee Date

_____ _____
Printed Name Date of Work Completion

_____
Telephone Number

Map Name: LINCOLN
Print Date: 10/23/2013

Scale: 1 inch = 2,000 ft.
Map Center: 044.1010749° N 07

Horizontal Datum: NAD27

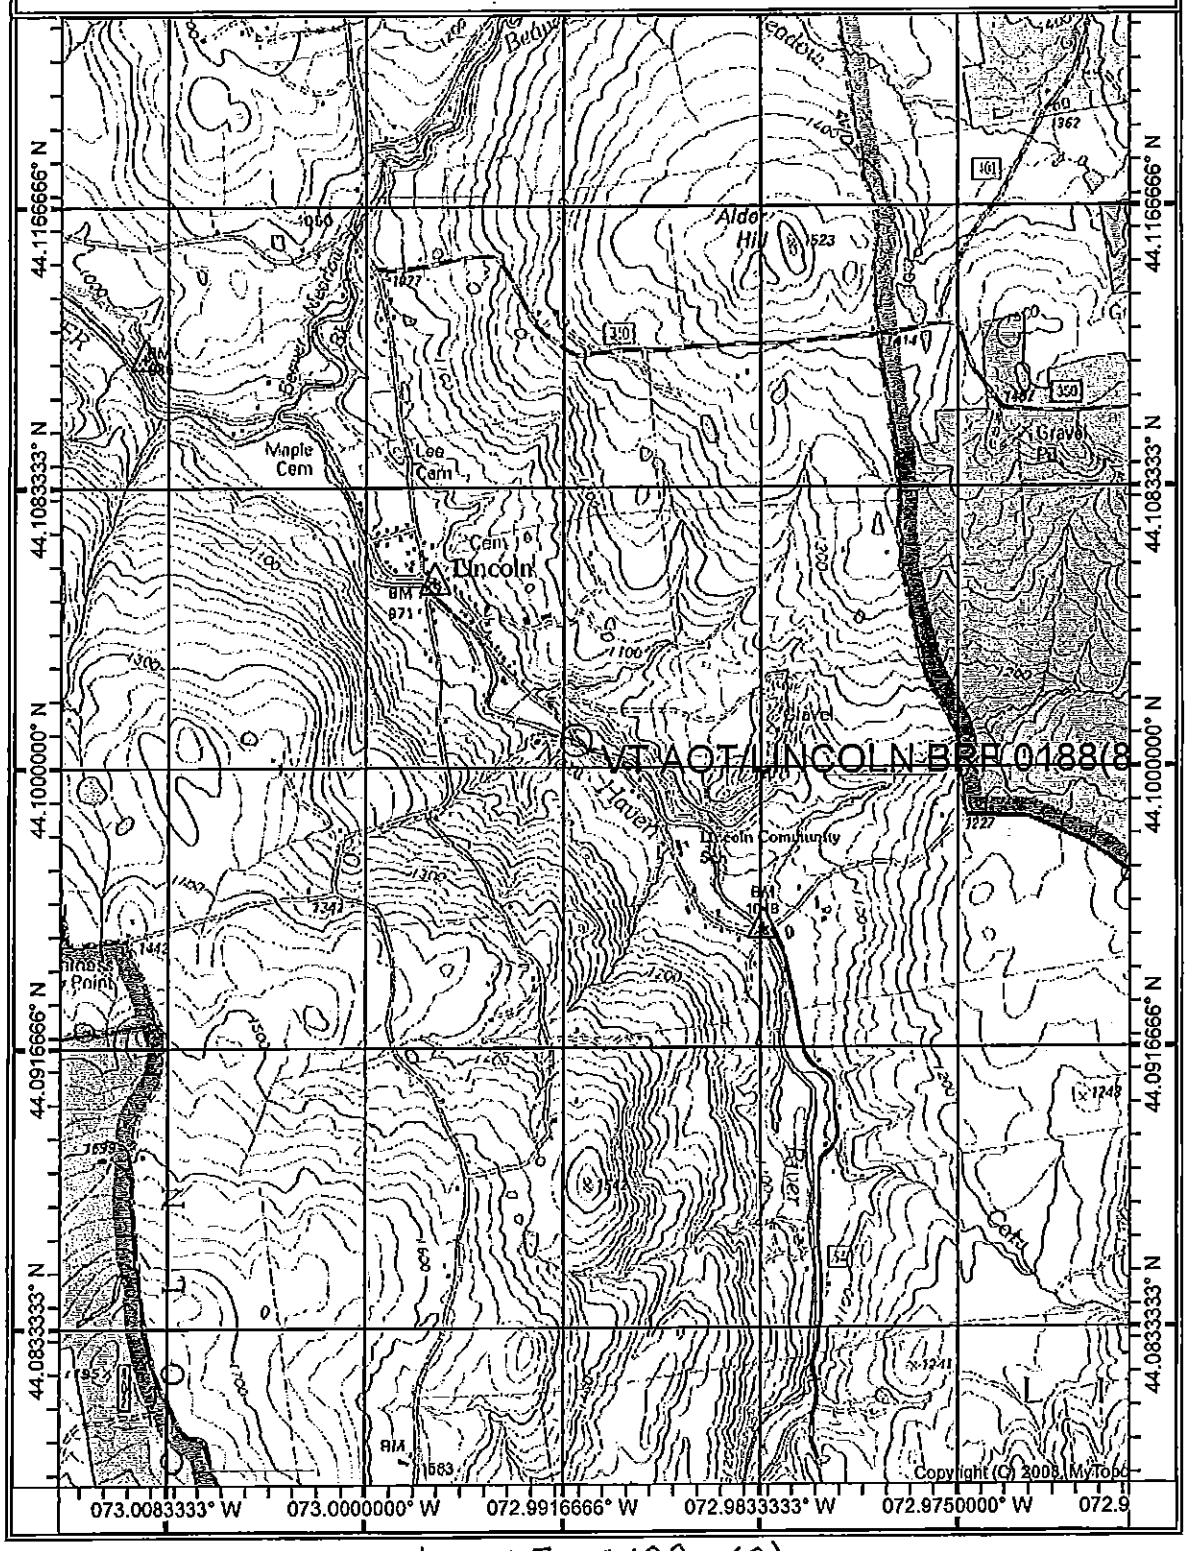

VT AOT/LINCOLN BRF 0188(8)

LINCOLN BRF 0188 (8)

SCALE 1:24000

0 1000 2000 3000 4000 5000 6000 7000

FEET

STATE OF VERMONT
AGENCY OF TRANSPORTATION

PROPOSED IMPROVEMENT

BRIDGE PROJECT
TOWN OF LINCOLN
COUNTY OF ADDISON
TH 1 (RURAL MAJOR COLLECTOR)
BRIDGE #19

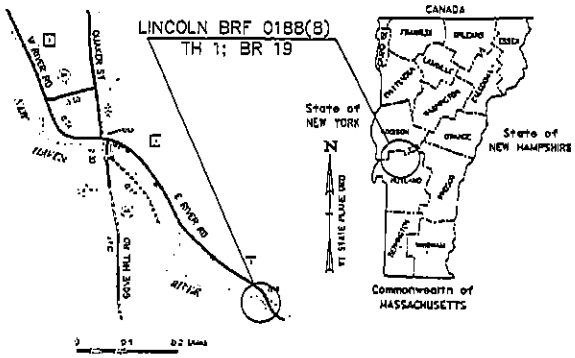

SEE SHEET 3 FOR INDEX OF DRAWINGS AND LIST OF STANDARDS.

PROJECT LOCATION: BEGINNING AT A POINT ON EAST RIVER ROAD APPROXIMATELY 0.5 MILES SOUTH OF ITS JUNCTION WITH GOVE HILL ROAD AND PROCEEDING SOUTHERLY FOR APPROXIMATELY 0.1 MILES ALONG EAST RIVER ROAD.

PROJECT DESCRIPTION: REPLACE EXISTING BRIDGE WITH A NEW WIDENED BRIDGE ON AN ALIGNMENT SIMILAR TO EXISTING INCLUDING RELATED CHANNEL AND APPROACH WORK.

LENGTH OF STRUCTURE: 124.24 FEET
LENGTH OF ROADWAY: 475.76 FEET
LENGTH OF PROJECT: 600 FEET

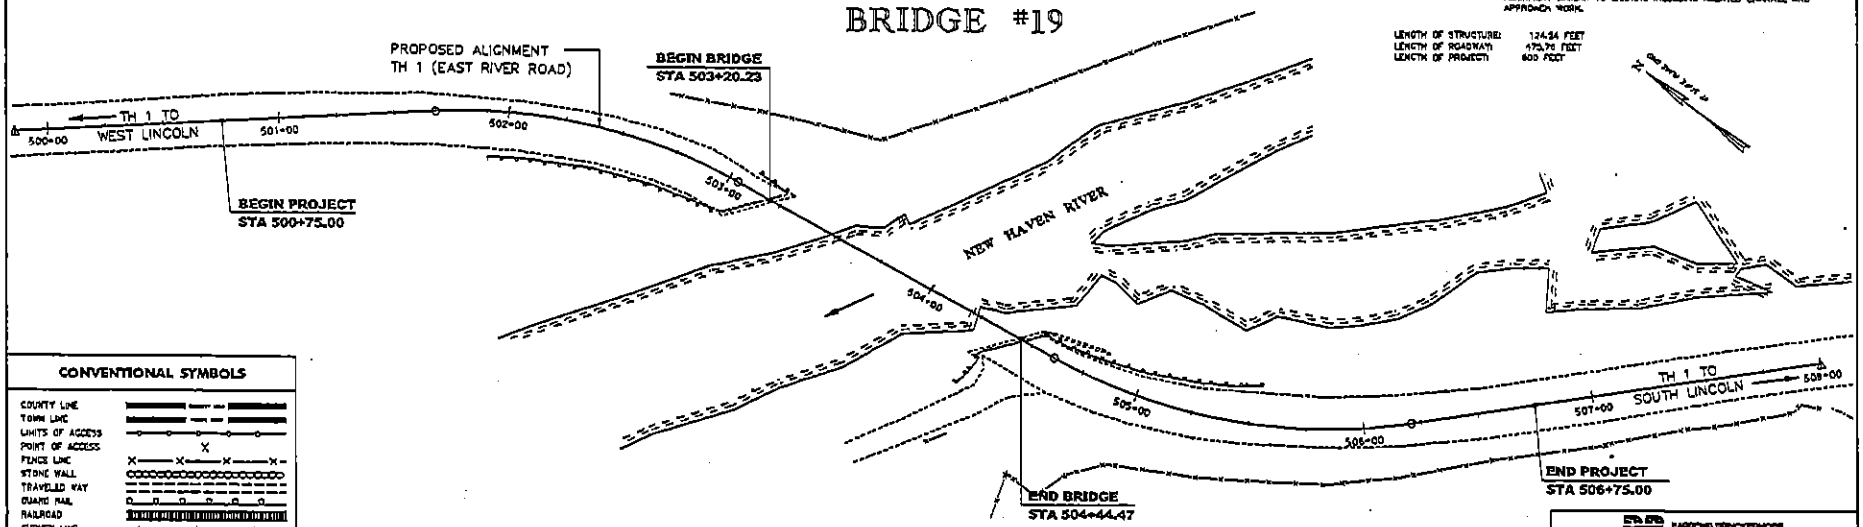

CONVENTIONAL SYMBOLS

COUNTY LINE
TOWN LINE
LIMITS OF ACCESS
POINT OF ACCESS
FENCE LINE
STONE WALL
TRAVELED WAY
GUARD RAIL
RAILROAD
SURVEY LINE
CULVERT
POWER POLE
TELEPHONE POLE
TREES
CONTROL OF ACCESS
PROPERTY LINE
R.O.W. TAKING LINE
SLOPE RIGHTS
TOP OF CUT
TOE OF SLOPE

SURVEYED BY : VERMONT SURVEY & ENGINEERING, INC.
SURVEYED DATE : 11/16/2010

DATUM
VERTICAL NAVD 88 (GEOID 9 FT
HORIZONTAL NAD 83 (CORS) SPC (4400VT) sFT

SCALE 1" = 25'-0

THESE PLANS ARE SUBJECT TO SUCH ENGINEERING CHANGES AS MAY BE REQUIRED BY THE FEDERAL HIGHWAY ADMINISTRATION OR THE DIRECTOR OF PROGRAM DEVELOPMENT.

CONSTRUCTION IS TO BE CARRIED ON IN ACCORDANCE WITH THESE PLANS AND THE STANDARD SPECIFICATIONS FOR CONSTRUCTION DATED 2011, AS APPROVED BY THE FEDERAL HIGHWAY ADMINISTRATION ON JULY 20, 2011 FOR USE ON THIS PROJECT, INCLUDING ALL SUBSEQUENT REVISIONS AND SUCH REVISED SPECIFICATIONS AND SPECIAL PROVISIONS AS ARE INCORPORATED IN THESE PLANS.

FARDING BRINCKERHOFF
850 ELM STREET
MANCHESTER, NH 03101

DIRECTOR OF PROGRAM DEVELOPMENT
APPROVED _____ DATE _____

PROJECT MANAGER : TODD SUMNER

PROJECT NAME : LINCOLN
PROJECT NUMBER : BRF 0188 (8)

SHEET 1 OF 35 SHEETS

10/23/2013

STATE OF VERMONT
AGENCY OF TRANSPORTATION

PRELIMINARY INFORMATION SHEET (BRIDGE)

LRFD

INDEX OF SHEETS

PLAN SHEETS

1	TITLE SHEET
2	PRELIMINARY INFORMATION SHEET
3 - 4	TYPICAL SECTIONS
5	SURVEY TIE SHEET
6 - 7	LAYOUT SHEETS
8 - 9	PROFILE SHEETS
10	EPSC PLAN NARRATIVE
11 - 12	EPSC EXISTING CONDITIONS SITE PLANS
13 - 14	EPSC CONSTRUCTION CONDITIONS SITE PLANS
15 - 16	EPSC FINAL CONDITIONS SITE PLANS
17 - 18	EPSC DETAILS
19 - 20	TRAFFIC CONTROL SHEETS
21	BORING LOCATION PLAN
22	BORING LOG SHEET
23	PLAN AND ELEVATION SHEET
24 - 31	MAINLINE CROSS SECTIONS
32	BANKING DIAGRAM & MATERIAL TRANSITION SHEET
33 - 35	CHANNEL CROSS SECTIONS

STANDARDS LIST

FINAL HYDRAULIC REPORT

HYDROLOGIC DATA

Date: 9/26/2011

DRAINAGE AREA: 70.99 mi
CHARACTER OF TERRAIN: wooded, mountainous, rural
STREAM CHARACTERISTICS: some sinuous, straight, not braided or anabranched
NATURE OF STREAMBED: mostly cobbles

PEAK FLOW DATA

Q 2.33 =	1890 cfs	Q 50 =	2930 cfs
Q 10 =	1770 cfs	Q 100 =	3670 cfs
Q 25 =	2225 cfs	Q 500 =	4310 cfs

DATE OF FLOOD OF RECORD: unknown
ESTIMATED DISCHARGE: unknown
WATER SURFACE ELEV.: unknown
NATURAL STREAM VELOCITY: on Q50 = 9.7 fps
ICE CONDITIONS: light to moderate
DEBRIS: moderate
DOES THE STREAM REACH MAXIMUM HIGHWATER ELEV. RAPIDLY? unknown
IS ORDINARY RISE RAPID? unknown
IS STAGE AFFECTED BY UPSTREAM OR DOWNSTREAM CONDITIONS? no
IF YES, DESCRIBE:

WATERSHED STORAGE: 1% HEADWATERS:
UNIFORM: X
IMMEDIATELY ABOVE SITE:

EXISTING STRUCTURE INFORMATION

STRUCTURE TYPE: 2 span rolled beam - on hinges
YEAR BUILT: 1934
CLEAR SPAN(NORMAL TO STREAM): 61.4 ft
VERTICAL CLEARANCE ABOVE STREAMBED: 17.9 ft
WATERWAY OF FULL OPENING: 1107.8 sf
DISPOSITION OF STRUCTURE: Opened at 45 cfs
TYPE OF MATERIAL UNDER SUBSTRUCTURE: bedrock

WATER SURFACE ELEVATIONS AT:

Q 2.33 =	883.4	VELOCITY =	6.6 fps
Q10 =	884.8	"	7.2 fps
Q25 =	885.4	"	8.1 fps
Q50 =	885.9	"	9.7 fps
Q100 =	886.5	"	9.3 fps

LONG TERM STREAMBED CHANGES: none noted

IS THE ROADWAY OVERTOPPED BELOW Q100: no
FREQUENCY: n/a
RELIEF ELEVATION: n/a
DISCHARGE OVER ROAD @Q100: no

UPSTREAM STRUCTURE

TOWN: Lincoln
HIGHWAY #: TH 1 (East River Road)
CLEAR SPAN: 68 ft
YEAR BUILT: Surveyed: 1978, Superstruc: 2003
STRUCTURE TYPE: Precast concrete superstructure w/ pinned PS concrete box beams
DISTANCE: 2140 ft
STRUCTURE #: 11
CLEAR HEIGHT: 32
FULL WATERWAY: 1780 SF

DOWNSTREAM STRUCTURE

TOWN: Lincoln
HIGHWAY #: TH 9 (Gove Hill Road)
CLEAR SPAN: 87.8 ft
YEAR BUILT: 2008
STRUCTURE TYPE: steel deck bridge
DISTANCE: 2930 ft
STRUCTURE #: 49
CLEAR HEIGHT: 18.6 ft
FULL WATERWAY: 980.1 sf

LRFR LOAD RATING FACTORS

LOADING LEVELS	TRUCK						
	HL-93	HS-20	T-12	3-AXLE	2A-STR	4A-STR	5A-2S2
TONNAGE INVENTORY	29	36	36	55	30	34.5	38
POSTING							
OPERATING							
COMMENTS							

PROPOSED STRUCTURE

STRUCTURE TYPE: prestressed box beam
CLEAR SPAN(NORMAL TO STREAM): 84.8 ft
VERTICAL CLEARANCE ABOVE STREAMBED: 18.2 ft
WATERWAY OF FULL OPENING: 1207.6 sf

WATER SURFACE ELEVATIONS AT:

Q2.33 =	883.2	VELOCITY =	6.8 fps
Q10 =	884.7	"	7.3 fps
Q25 =	884.8	"	8.1 fps
Q50 =	885.3	"	9.7 fps
Q100 =	885.7	"	9.3 fps

IS THE ROADWAY OVERTOPPED BELOW Q100: no
FREQUENCY: n/a
RELIEF ELEVATION: n/a
DISCHARGE OVER ROAD @Q100: no

AVERAGE LOW ELEVATION OF SUPERSTRUCTURE: 889.1
VERTICAL CLEARANCE: on Q50 = 10.2 ft

SCOUR: structure is founded on ledge
REQUIRED CHANNEL PROTECTION: Stone Fill Type IV

PERMIT INFORMATION

AVERAGE DAILY FLOW	82 cfs	DEPTH OR ELEVATION:
ORDINARY LOW WATER	26 cfs	880.19
ORDINARY HIGH WATER:	1440 cfs	884.19

TEMPORARY BRIDGE REQUIREMENTS

STRUCTURE TYPE: n/a
CLEAR SPAN (NORMAL TO STREAM): n/a
VERTICAL CLEARANCE ABOVE STREAMBED: n/a
WATERWAY AREA OF FULL OPENING: n/a

ADDITIONAL INFORMATION

TRAFFIC MAINTENANCE NOTES

1. THE BRIDGE WILL BE CLOSED TO TRAFFIC DURING CONSTRUCTION.
2. TRAFFIC SIGNALS ARE NOT NECESSARY.
3. SIDEWALKS ARE NOT NECESSARY.

DESIGN VALUES

1. DESIGN LIVE LOAD		HL-93
2. FUTURE PAVEMENT	d_p:	3.0 INCH
3. DESIGN SPAN	L_d:	120.00 FT
4. MIN. MID-SPAN POS. CAMBER @ RELEASE (PRESTRESSED UNITS)	Δ	---
5. PRESTRESSING STRAND (0.6) INCH DIAMETER - LOW RELAX)	f_{py}	270 KSI
6. PRESTRESSED CONCRETE STRENGTH	$f'c$	6.0 KSI
7. PRESTRESSED CONCRETE RELEASE STRENGTH	$f'ci$	5.0 KSI
8. CONCRETE, HIGH PERFORMANCE CLASS AA	$f'c$	6.0 KSI
9. CONCRETE, HIGH PERFORMANCE CLASS A	$f'c$	4.0 KSI
10. CONCRETE, HIGH PERFORMANCE CLASS B	$f'c$	3.5 KSI
11. CONCRETE, CLASS C	$f'c$	3.0 KSI
12. REINFORCING STEEL	f_y	60 KSI
13. STRUCTURAL STEEL, AASHTO M270	f_y	---
14. SOIL UNIT WEIGHT	γ	0.140 KCF
15. NOMINAL BEARING RESISTANCE OF SOIL	q_n	---
16. SOIL BEARING RESISTANCE FACTOR (REFER TO AASHTO LRFD)	ϕ	---
17. NOMINAL BEARING RESISTANCE OF ROCK	q_n	70.0 KSF
18. ROCK BEARING RESISTANCE FACTOR (REFER TO AASHTO LRFD)	ϕ	0.45
19. NOMINAL AXIAL PILE RESISTANCE	q_p	---
20. PILE YIELD STRENGTH ASTM A313	f_y	---
21. PILE SIZE		---
22. EST. PILE LENGTH	L_p:	
23. PILE RESISTANCE FACTOR	ϕ	---
24. LATERAL PILE DEFLECTION	Δ	---
25. BASIC WIND SPEED	V_b:	---
26. MINIMUM GROUND SNOW LOAD	p_g:	---
27. SEISMIC DATA PGA = ---	S_p:	---
	S_1:	---

TRAFFIC DATA

YEAR	ADT	DHV	% D	% T	ADTT	
2014	1300	160	60	8.1	110	20 year ESAL for flexible pavement from 2014 to 2034 : 633000
2034	1400	160	60	10.7	160	40 year ESAL for flexible pavement from 2014 to 2064 : 1407000
						Design Speed : 30 mph

AS BUILT "REBAR" DETAILS

LEVEL I	LEVEL II	LEVEL III
TYPE:	TYPE:	TYPE:
GRADE:	GRADE:	GRADE:

PROJECT NAME: LINCOLN
PROJECT NUMBER: BRF 0188(8)

FILE NAME: s10088pl.dgn
PROJECT LEADER: W. Garfield
DESIGNED BY: A. Stockin
PRELIMINARY INFORMATION SHEET 1
PLOT DATE: 10/20/2013
DRAWN BY: W. Garfield
CHECKED BY: P. Armano
SHEET 2 OF 35

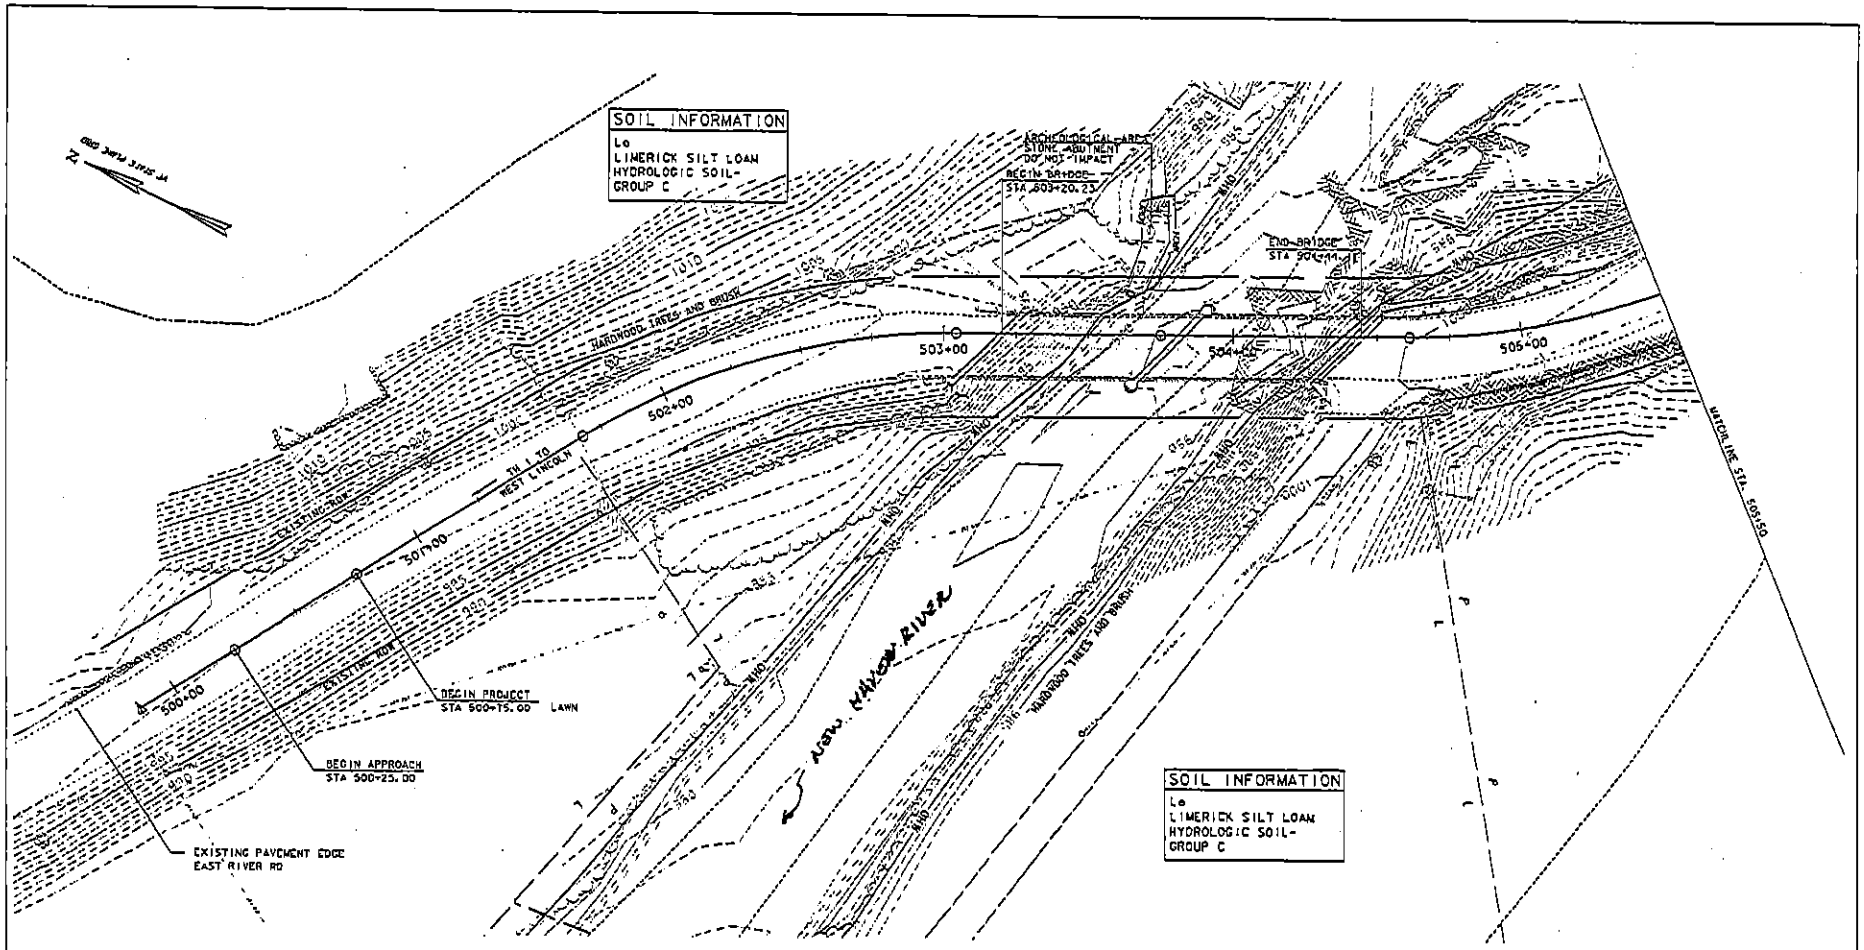

LEGEND

— AER EST —	AERIAL ELECTRIC & TELEPHONE
———	SOIL BOUNDARY
———	WETLAND BUFFER ZONE
ARCH ———	ARCHEOLOGICAL RESOURCES
—— OHW ——	ORDINARY HIGH WATER

SCALE 1" = 20'-0

20 0 20

PARSONS BRINCKERHOFF
550 ELM STREET
MANCHESTER, NH 03101

PROJECT NAME: LINCOLN	
PROJECT NUMBER: BRF 0188 (8)	
FILE NAME: z:\0J06Gexsltebdr.dgn	PLOT DATE: 7/23/2013
PROJECT LEADER: K. DONNSTON	DRAWN BY: C. CARNEY
DESIGNED BY: C. CARNEY	CHECKED BY: R. BENJAMIN
EPSC EXISTING CONDITIONS SITE PLAN III	SHEET 11 OF 35

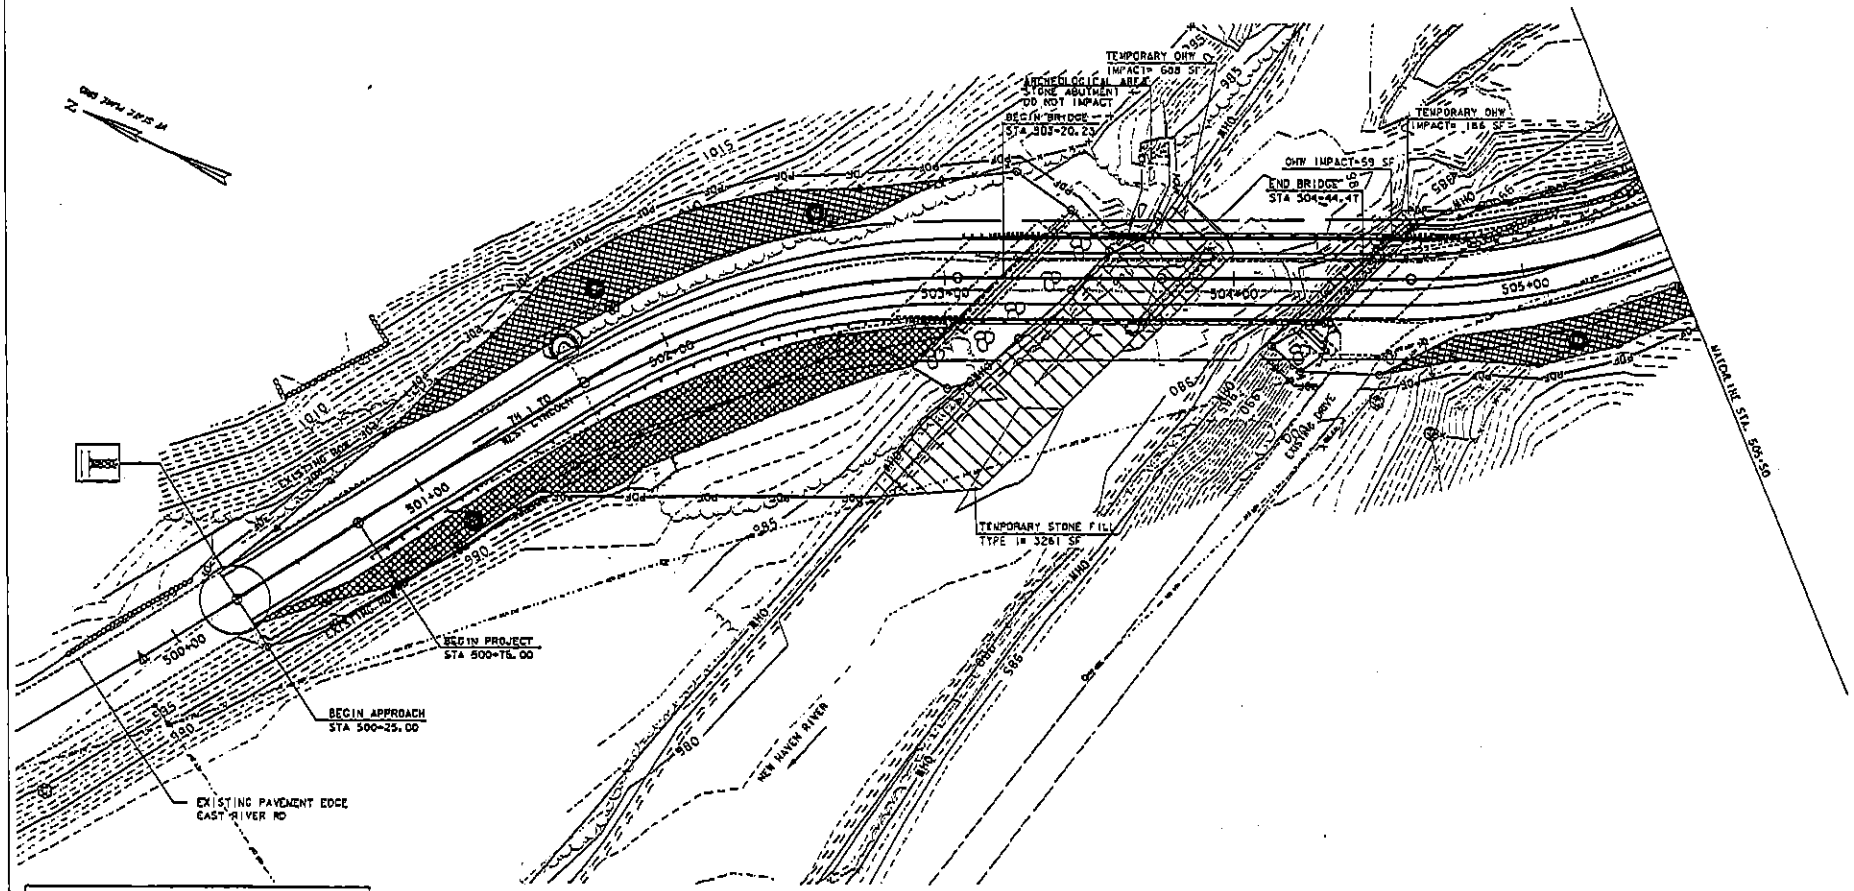

LEGEND

ARCH	ARCHEOLOGICAL AREA
PDF	PROJECT DEMARCATION FENCE
	SILT FENCE
	ROLLED EROSION CONTROL PRODUCT (RECP)
	OHW IMPACT
	TEMPORARY OHW IMPACT
	STABILIZED CONSTRUCTION ENTRANCE
	PIPE INLET PROTECTION

CONTOURS SHOWN ARE EXISTING.
SEE CROSS-SECTIONS FOR PROPOSED GRADING.

SCALE 1" = 20'-0"

PARSONS BRINCKERHOFF
630 ELM STREET
MANCHESTER, NH 03101

PROJECT NAME: LINCOLN
PROJECT NUMBER: BRF 0188 (8)

FILE NAME: x10j066erobdr.dgn
PROJECT LEADER: K. DONINGTON
DESIGNED BY: C. CARNEY
PLOT DATE: 10/31/2013
DRAWN BY: C. CARNEY
CHECKED BY: R. BENJAMIN
EPSC CONSTRUCTION CONDITIONS SITE PLAN 03 SHEET 13 OF 33

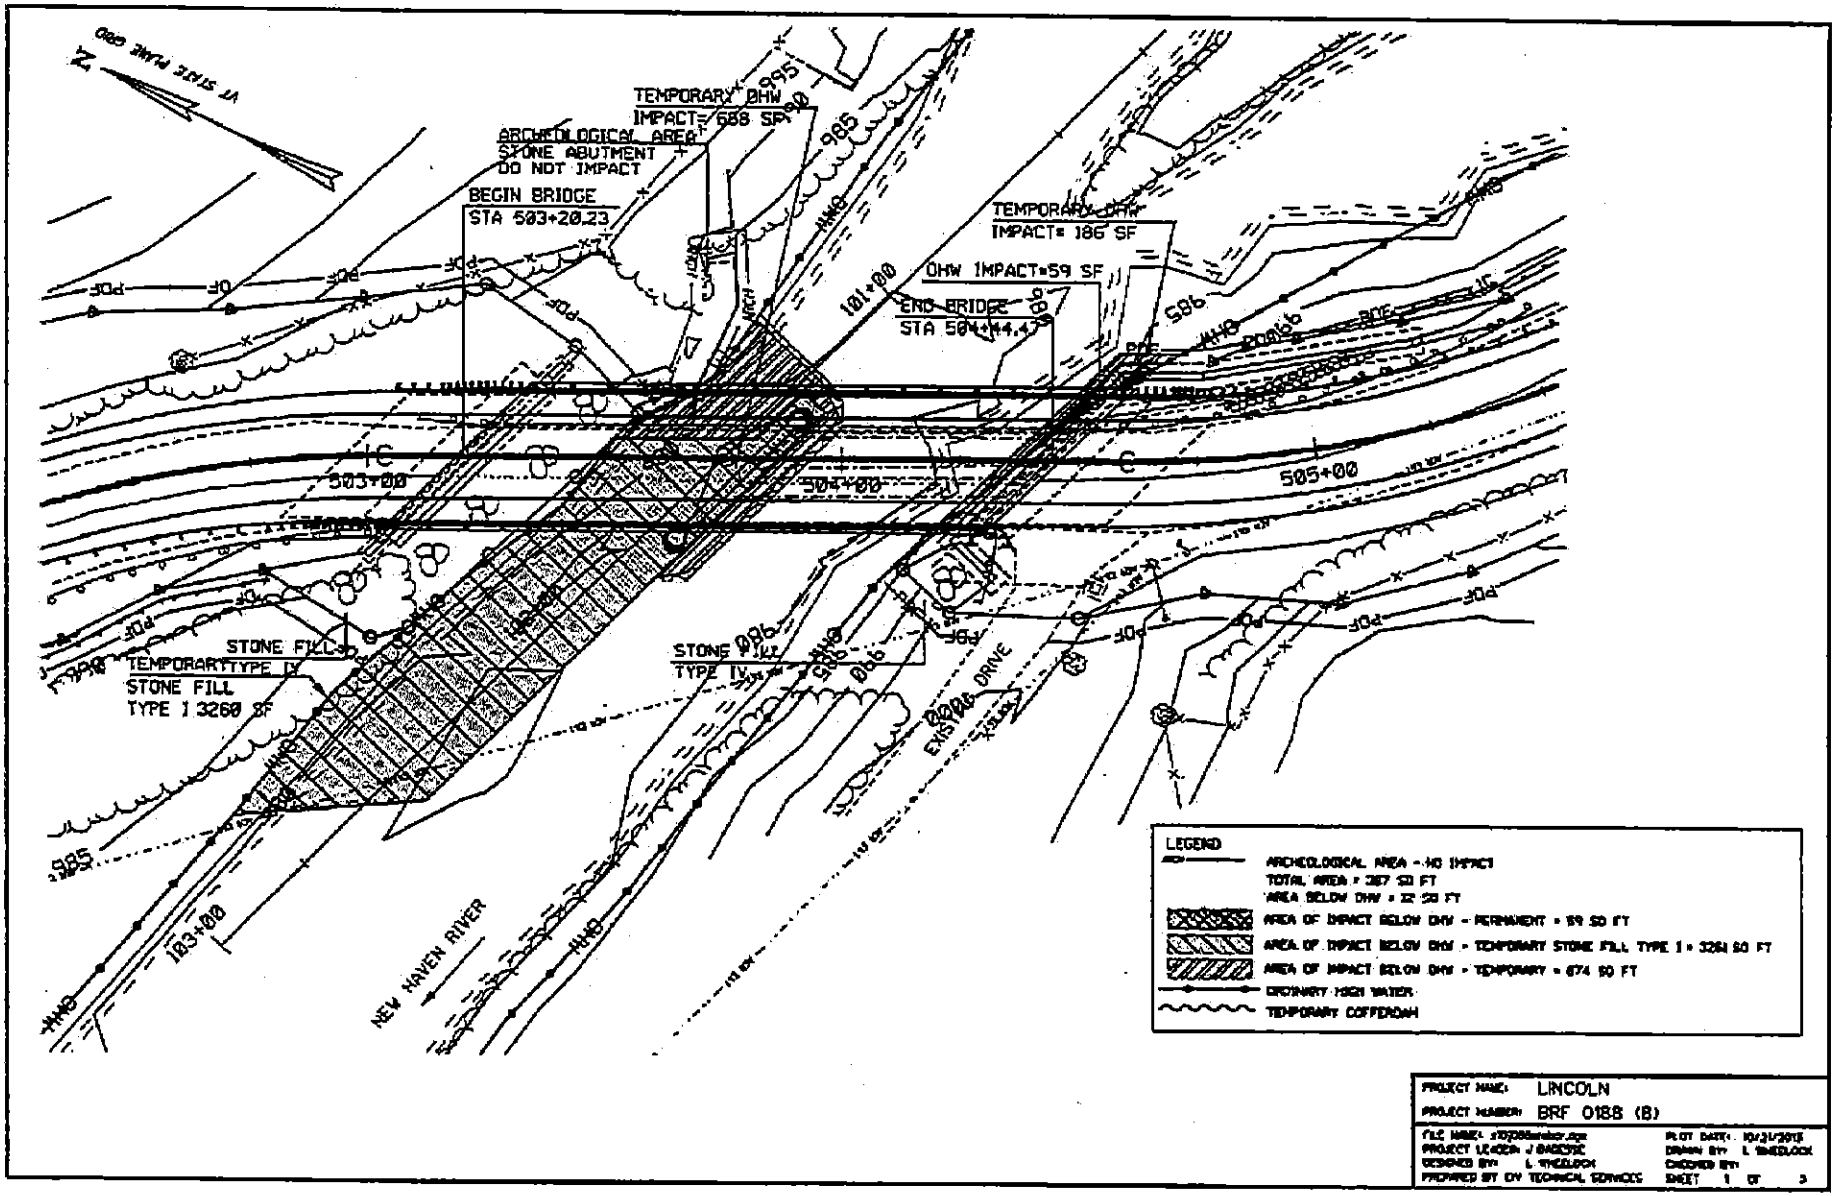
VT STATE PLANE GRID
N
TEMPORARY OHW
IMPACT= 688 SF
ARCHEOLOGICAL AREA
STONE ABUTMENT
DO NOT IMPACT
BEGIN BRIDGE
STA 503+20.23
TEMPORARY OHW
IMPACT= 186 SF
OHW IMPACT=59 SF
END BRIDGE
STA 504+44.47
101+00
503+00
504+00
505+00
STONE FILL
TEMPORARY TYPE IV
STONE FILL
TYPE I 3260 SF
STONE FILL
TYPE IV
EXISTING DRIVE
NEW HAVEN RIVER
103+00
LEGEND
ARCHEOLOGICAL AREA - NO IMPACT
TOTAL AREA = 387 SQ FT
AREA BELOW OHW = 32 SQ FT
AREA OF IMPACT BELOW OHW - PERMANENT = 59 SQ FT
AREA OF IMPACT BELOW OHW - TEMPORARY STONE FILL TYPE I = 3261 SQ FT
AREA OF IMPACT BELOW OHW - TEMPORARY = 674 SQ FT
ORDINARY HIGH WATER
TEMPORARY COFFERDAM
PROJECT NAME: LINCOLN
PROJECT NUMBER: BRF 0188 (B)
PROJECT LEADER: J BADESSE
DESIGNED BY: L WHEELOCK
PREPARED BY DIV TECHNICAL SERVICES
PLOT DATE: 10/21/2015
DRAWN BY: L WHEELOCK
CHECKED BY:
SHEET 1 OF 3

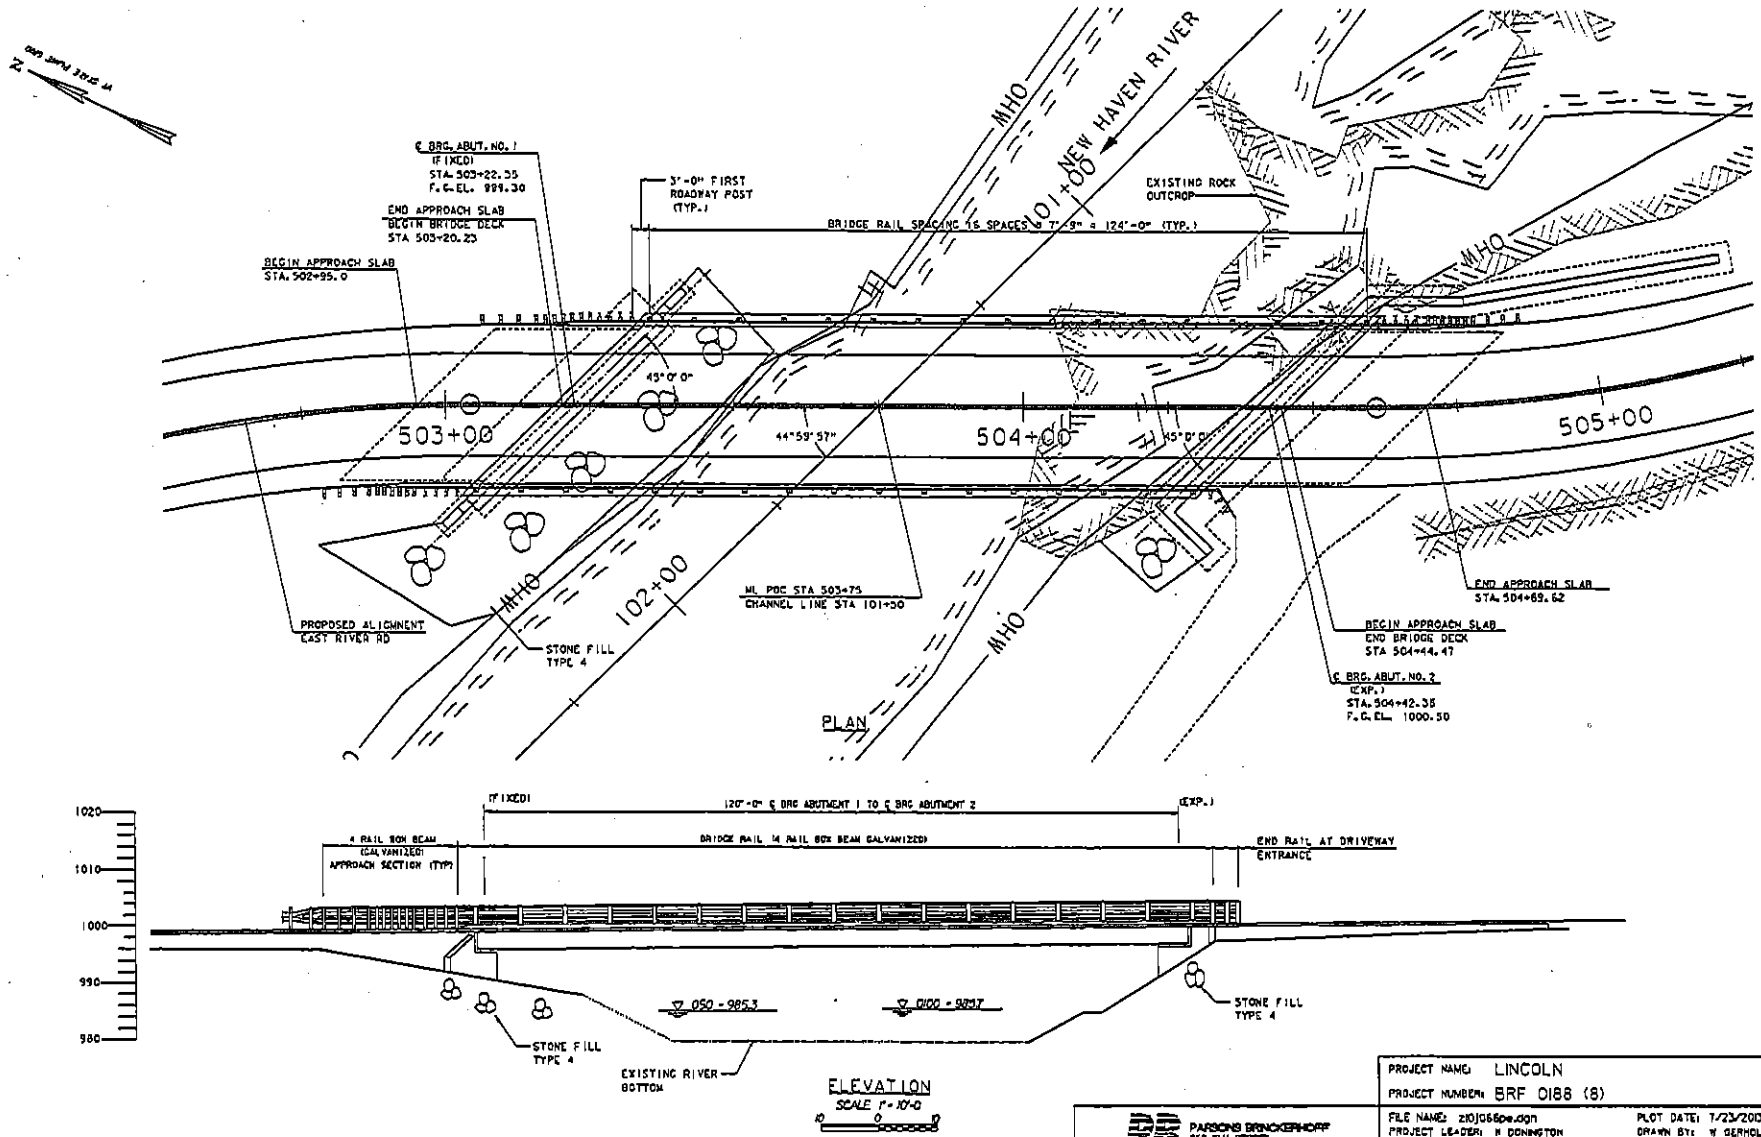

PROJECT NAME: LINCOLN
PROJECT NUMBER: BRF 0188 (8)

PARSONS BRINCKERHOFF
850 ELM STREET
MANCHESTER, NH 03101

FILE NAME: z10j055pe.dgn
PROJECT LEADER: R DONNGTON
DESIGNED BY: P ARMANO
PLAN AND ELEVATION SHEET

PLOT DATE: 7/23/2003
DRAWN BY: W GERHOLD
CHECKED BY: A STOCKIN
SHEET 23 OF 35

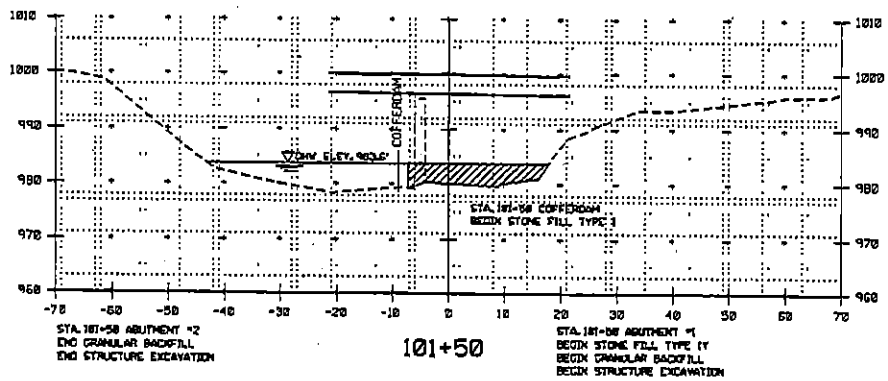

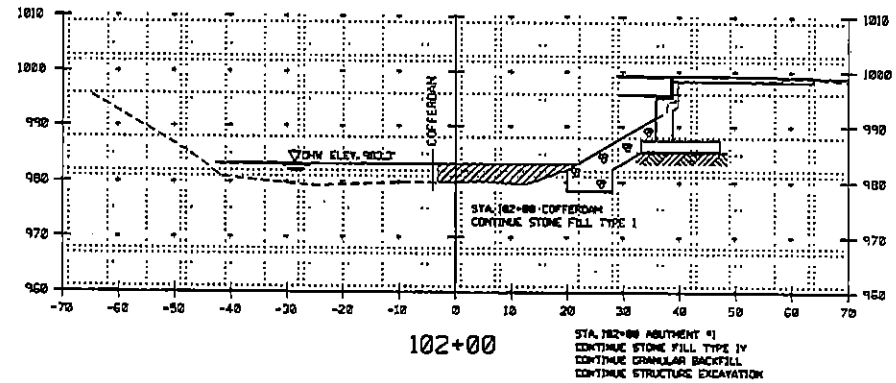

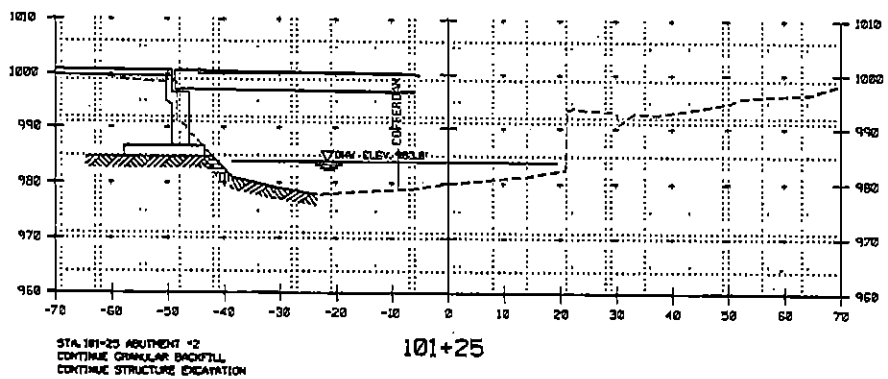

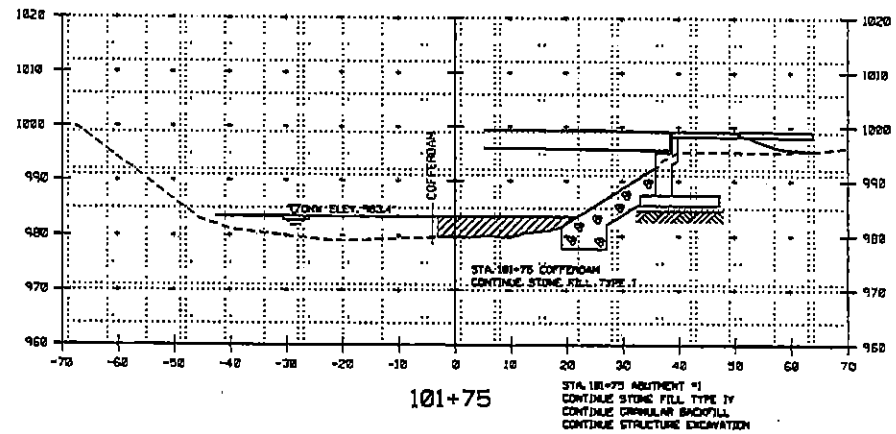

VOLUME OF IMPACT BELOW OHW -
PERMANENT STONE FILL TYPE IV = 625 CF = 23 CY

VOLUME OF IMPACT BELOW OHW -
TEMPORARY STONE FILL TYPE I = 11475 CF = 425 CY

CHANNEL CROSS SECTIONS

PROJECT NAME: LINCOLN	
PROJECT NUMBER: BRF 0188 (8)	
FILE NAME: x10j066xs1.dgn	PLOT DATE: 10/21/2013
PROJECT LEADER: J. DAGESSE	DRAWN BY: L. WHEELOCK
DESIGNED BY: L. WHEELOCK	CHECKED BY:
PREPARED BY: EIV TECHNICAL SERVICES	SHEET 2 OF 3

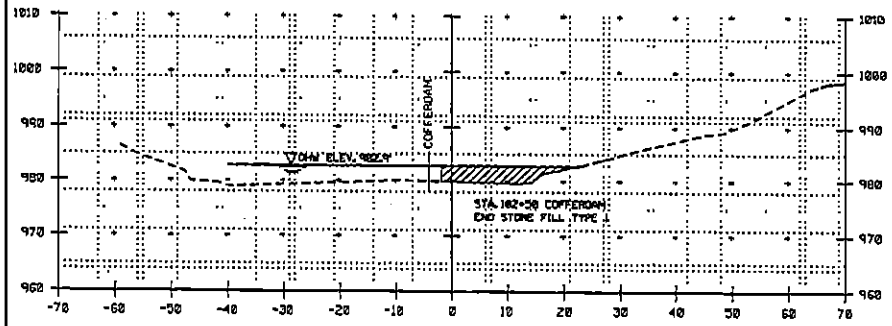

102+50

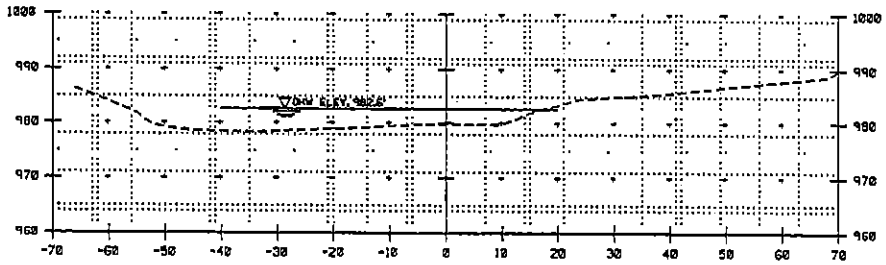

103+00

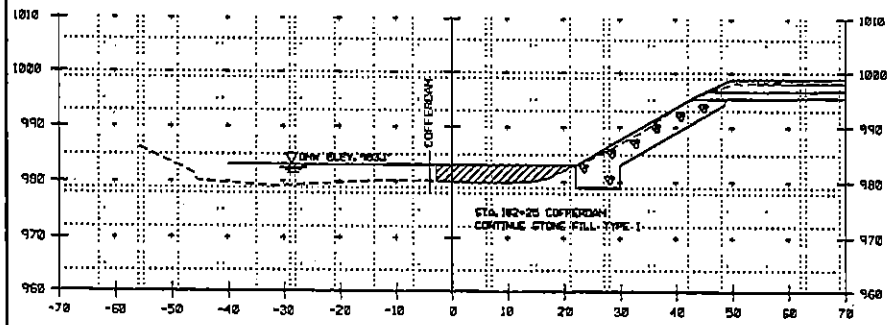

102+25

STA. 102+25 ABUTMENT #1
END STONE FILL TYPE IV
END GRANULAR BACKFILL
END STRUCTURE EXCAVATION

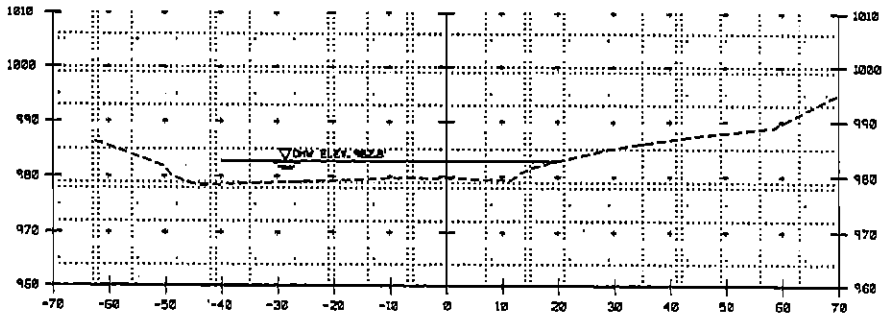

102+75

VOLUME OF IMPACT BELOW OHW -
PERMANENT STONE FILL TYPE IV = 625 CF = 23 CY

VOLUME OF IMPACT BELOW OHW -
TEMPORARY STONE FILL TYPE I = 11475 CF = 425 CY

CHANNEL CROSS SECTIONS
STA. 102+25 - STA. 103+00

PROJECT NAME: LINCOLN	
PROJECT NUMBER: BRF 018B (8)	
FILE NAME: s10086ss1.dgn	PLOT DATE: 10/21/2013
PROJECT LEADER: J DACESSE	DRAWN BY: L WHEELOCK
DESIGNED BY: L WHEELOCK	CHECKED BY:
PREPARED BY: DIV TECHNICAL SERVICES	SHEET 3 OF 3

PUBLIC NOTICE

US Army Corps
of Engineers
New England District
696 Virginia Road
Concord, MA 01742-2751

Date: December 11, 2012
Contact: Marty Abair
E-mail: Martha.a.abair@usace.army.mil

REISSUANCE OF THE DEPARTMENT OF THE ARMY VERMONT GENERAL PERMIT (GP)

The New England District, U.S. Army Corps of Engineers, 696 Virginia Road, Concord, Massachusetts 01742-2751 hereby announces the reissuance of the statewide Vermont General Permit (GP), pursuant to 33 CFR 325.5(c)(3), for minimal-impact activities within the State of Vermont. The prior PGP expired on December 5, 2012. The Vermont GP continues the expedited review process for activities in Corps jurisdiction under Section 404 of the Clean Water Act and Section 10 of the Rivers and Harbors Act of 1899. This public notice is issued in accordance with 33 CFR 325.10 to ensure potential applicants for permits are informed of the requirements of 33 CFR 320-330 and of the steps required to obtain permits for activities in waters of the U.S.

General permits are encouraged under the President's plan to streamline state and Federal regulatory programs. This GP is designed to authorize activities formerly covered under the previous GP program and the prior GP that expired on December 5, 2012. This reissued GP became effective on December 6, 2012. Continued utilization of the general permit process in place of the NWPs will provide important benefits to the public, including simplifying the process, expediting decisions, and providing necessary environmental protection.

Projects with minimal individual and cumulative effects on the aquatic environment will be approved administratively under this GP. Projects not meeting the GP's terms and general conditions, of which General Condition 3 requires projects authorized by the GP to have minimal effects and secondary (indirect) and cumulative adverse environmental impacts, are subjected to an Individual Permit review. Federal exemptions, which are not necessarily the same as the State of Vermont's exemptions, are also not altered by the GP. In addition, for projects authorized pursuant to this GP, project proponents must obtain the appropriate or State approvals when required in order for this GP authorization to be valid.

Projects that the Corps authorized under the previous VT GP prior to issuance of this GP shall remain authorized as specified in each authorization. Activities authorized pursuant to 33 CFR 330.3 (activities occurring before certain dates) are not affected by this GP.

You may view the Vermont GP on our web site at www.nae.usace.army.mil. Select "Regulatory/Permitting," "Permits", "State General Permits" and then "Vermont." Please contact Marty Abair at (978) 318-8484 or martha.a.abair@usace.army.mil for more information.

Frank J. Delgiudice
Chief, Permits & Enforcement Branch

Enclosure

DEPARTMENT OF THE ARMY
GENERAL PERMIT
STATE OF VERMONT

The New England Division of the U.S. Army Corps of Engineers (Corps) hereby issues this General Permit (GP) that expedites review of minimal environmental impact work associated with the aquatic environment of navigable and inland waters and wetlands within the State of Vermont. This general permit for Vermont is known as the Vermont General Permit.

I. GENERAL CRITERIA:

Activities with **minimal impacts**, as specified by this GP's terms (Pages 1-6), general conditions (GC) (Pages 7-16) and Appendix A - Definition of Categories, qualify for authorization under the GP in either Category 1 or Category 2.

Proponents should first review Appendix A - Definition of Categories to see if a project meets either:

- Category 1: Self-Verification, Category 1 Notification Form required
  Projects meeting Category 1 criteria and which are in full compliance with the general conditions may be authorized under this GP after submission of the Category 1 Notification Form.
- Category 2: Reporting.
  An application to and written verification from the Corps is required for these projects.

If you determine that your project is eligible for Category 1 as defined in Appendix A, you must then ensure that your project is in full compliance with this GP's terms and general conditions. If any of these terms and conditions are not met, your project must be reviewed in the Category 2 or the Individual Permit category. The Individual Permit thresholds are defined in Appendix A and the Individual Permit procedures are briefly described on Page 6. This GP does not affect the Corps Individual Permit review process or activities exempt from Corps regulation.

II. ACTIVITIES COVERED:

- Work and structures that are located in, under, or over any navigable water of the United States[1], the excavating from or depositing of material in such waters, or the accomplishment of any other work affecting the course, location, condition, or capacity of such waters (regulated by the Corps under Section 10 of the Rivers and Harbors Act of 1899); and

- The discharge of dredged or fill material into waters of the U.S. [regulated by the Corps under Section 404 of the Clean Water Act (CWA)]. This GP also covers secondary impacts[2], which are effects on an aquatic ecosystem that are associated with a discharge of dredged or fill materials, but do not result from the actual placement of the dredged or fill material. The Corps does not regulate secondary impacts unless there is an actual placement of dredged or fill material.

[1] Waters of the U.S., inland waters and wetlands, and navigable waters of the U.S. are defined at Appendix A, Endnotes/Definitions.
[2] See GC 3 on Page 7 and Appendix A, Endnote 4 for more information on secondary impacts.

III. PROCEDURES:

A. State Approvals

Applicants are responsible for applying for and obtaining any required State approvals (see GC 1). Federal and State jurisdictions may differ in some instances. State permits may be required for specific projects regardless of the general permit category.

In order for authorizations under this GP to be valid, a Water Quality Certification (WQC) under Section 401 of the CWA (33 USC 1341) or waiver thereof must be obtained from the VT ANR, Water Quality Division prior to the commencement of work in Corps jurisdiction. The VT ANR has granted WQC for GP Category 1 activities provided the Corps exercises its discretionary authority to review any project covered under Category 1 when notified by the VT ANR that such project represents a threat to water quality. Therefore, a separate 401 WQC application is not required for activities involving fill in waters of the U.S. authorized under Category 1 of this GP.

The VT ANR conditionally granted WQC for GP Category 2 activities listed in Appendix A of this GP provided the Corps notifies the VT ANR and the interagency review team (USFWS, USEPA, VT ANR and the Corps) finds that the activity is reasonably likely to have minimal or no impact on water quality. The VT ANR retains the right to require an Individual WQC for any Category 2 activity. The VT ANR will respond within the same response times required of the Federal resource agencies.

B. Corps Authorizations

General permit authorizations consist of both Category 1 and 2 activities (see Appendix A). The thresholds outlined in this document are intended to ensure that the GP results in no more than a minimal impact to the aquatic environment. The Corps will coordinate review of all Category 2 activities with Federal and State agencies, as appropriate, and may require project modifications or mitigation to minimize impacts.

- **Category 1 – (Self-Verification, Category 1 Notification Form required)**
  - If you self-verify that your project qualifies for Category 1, your project is authorized under this GP and you are required to submit the Category 1 Notification Form at Appendix B to the Corps
  - Prospective permittees should carefully review this GP to determine whether applying to the Corps under Category 2 prior to commencing the authorized activity is required. Consultation with the Corps and/or outside experts may be necessary to ensure compliance with this GP's GCs and related Federal laws such as the Nationa Historic Preservation Act (see GC 7), the Endangered Species Act (ESA) (see GC 9) and the Wild and Scenic Rivers Act (see GC 11). Project proponents are encouraged to contact the Corps with Category 1 eligibility questions.
  - Secondary impacts must be included when determining if a project qualified for Category 1 (see GC 3).
  - Fill area includes all temporary and permanent fill.
  - Projects not meeting the Category 1 eligibility criteria are reviewed under Category 2 or Individual Permit procedures.

Enforcement cases. This GP does not apply to any existing or proposed activity in Corps jurisdiction associated with an on-going Corps or EPA enforcement action until such time as the enforcement action is resolved or the Corps determines that the activity may proceed independently without compromising the enforcement action. The Corps may choose not to accept applications or issue permits to any applicant with outstanding violations.

Category 2 (Corps Verification, Application and Written Approval Required)

Eligibility
Activities in Vermont that are:

- Subject to Corps jurisdiction;
- Meet the definition of Category 2 in Appendix A; and
- Meet the general conditions of this GP (Pages 7-16)

require **written approval from the Corps**. These projects will be reviewed through interagency screening to determine whether such activities may be authorized under this GP. **To be eligible and subsequently authorized, an activity must result in no more than a minimal impact to the aquatic environment as determined by the Corps in coordination with the interagency review team, in addition to meeting the criteria listed above.**

This may require project modifications involving avoidance, minimization or compensatory mitigation[3] for unavoidable impacts to ensure the net effects of a project are minimal.

To ensure compliance with this GP's general conditions, consultation with the Corps, other Federal or State resource agencies, or independent consultants, may be necessary. This includes consultation with the VT State Historic Preservation Officer (VT SHPO) (Page 16) and, when projects are proposed in Addison, Rutland or Bennington counties, the Stockbridge-Munsee Tribal Historic Preservation Officer (THPO) to ensure compliance with GC 7 and the VT ANR to comply with applicable general conditions. Also, note the review thresholds under Category 2 apply to single and complete projects only (see GC 5).

Application Procedures
Applicants must apply directly to the Corps at the Vermont Project Office (VPO), and are encouraged to simultaneously apply to the VT ANR for any related permits. Upon receipt of an application for a Category 2 activity, the Corps will determine if it:

(1) Requires additional information;
(2) Is appropriate for screening with the Federal resource agencies and State agencies (see Screening Procedures);
(3) Is ineligible under the terms and/or conditions of this GP;
(4) Requires project modification, mitigation or other special conditions to minimize impacts and protect the aquatic environment to be eligible for this GP; or
(5) Requires Individual Permit review regardless of whether the terms and conditions of this GP are met, based on concerns for the aquatic environment or any other factor of the public interest (GC 4).

Information Typically Required
In order to consider an application complete and review it with the interagency review team, the applicant must submit complete information. Please see www.nae.usace.army.mil for a more comprehensive checklist. Select "Regulatory", "Permits" "Forms" and then "Application and Plan Guideline Checklist." This information includes, but is not limited to:

- A completed Corps application form (ENG Form 4345[4])
- Plans that illustrate the proposed work in reference to the limits of Corps jurisdiction as applicable. Plans should be on 8.5" x 11" paper and contain all other appropriate information.
- A description of the proposed work, project purpose and location, including a locus map and photographs,

[3] Compensatory mitigation for waterway/wetland impacts may take the form of payment into the Ducks Unlimited In-Lieu Fee Program, wetland restoration, enhancement, creation, and/or preservation. See www.nae.usace.army.mil/regulatory, "Mitigation" and then "Vermont" for more information.

[4] Located at www.nae.usace.army.mil/regulatory under "Forms."

if applicable.

- Data sheets to support wetland delineations. (See GC 2.)
- A narrative description of the habitat(s) including dominant plant community(ies) present, soil type and relevant existing and adjacent land uses.
- A demonstration that there will be no more than minimal direct and indirect impacts to the aquatic resource(s) resulting from the project. Consideration should be given to impacts associated with expected hydrologic changes, effects on riparian habitat, forest fragmentation, impacts to headwater and ephemeral streams (Endnote 17), stormwater discharges and other potential water quality and wetland habitat impacts. (See GC 3.)
- Information on Federal endangered and threatened species and critical habitat, and State endangered and threatened species that occur or may occur in the project area. (See GC 9.)
  VT ANR, Department of Fish & Wildlife, Nongame and Natural Heritage program contact information is provided on Pages 16-17. Refer to Additional References on Pages 18-19 for additional information.
- Identification and description of potential impacts to essential fish habitat. (See GC 10.)
- Identification of potential discharges of pollutants to waters, including potential impacts to impaired waters, in the project area. (See GC 22.) Refer to Additional References on Pages 18-19.
- Identification, quantification, and description of potential impacts to aquatic resources, including delineation of wetlands, special aquatic sites, special wetlands and vernal pools. (See GC 27.)

Federal/State Screening Procedures

The Corps, Federal resource agencies [U.S. Fish and Wildlife Service (USFWS), U.S. Environmental Protection Agency (EPA), and National Marine Fisheries Service (NMFS)] and VT ANR will comprise the interagency review team. The Corps will also coordinate with the VT SHPO and, as appropriate, the THPO as to potential impacts of a project on historic properties.

Screening of Category 2 projects will be either through email, fax, mail or at interagency screening meetings at the Corps VPO. Projects are coordinated on a regular basis or as necessary to facilitate prompt decision making. The Corps and the Federal resource agencies, at the branch chief or equivalent level, may agree on certain activities that do not need to be coordinated at these meetings. The Corps, VT ANR, VT SHPO and, as appropriate, the THPO will review/screen complete applications for Category 2 activities with impacts between 3,000 square feet (SF) and 5,000 SF. The Corps will review/screen all complete applications for Category 2 projects with impacts greater than 5,000 SF with the interagency review team, VT SHPO and, as appropriate, the THPO.

The Corps may determine on its own or in consultation with the interagency review team, if applications for Category 2 work:

- Are eligible under the GP as proposed;
- Are ineligible under the terms and/or conditions of this GP;
- Require additional information;
- Will require project modification, mitigation or other special conditions to avoid or minimize adverse environmental impacts and protect the aquatic environment to be eligible for authorization under this GP; or
- Require Individual Permit review irrespective of whether the terms and general conditions of this GP are met, based on concerns for the aquatic environment or any other factor of the public interest (see GC 4).

The Federal resource agencies, the VT ANR, VT SHPO and, as appropriate, the THPO must provide verbal comments to the appropriate Corps project manager in the VPO within 10 business days of receiving the Determination of Eligibility (DOE) from the Corps. These verbal comments may consist of a request for additional information, recommendations for modification, mitigation, or special conditions to avoid or minimize adverse environmental impacts associated with the aquatic environment, and to ensure the terms and

general conditions of the GP are met, or a request for a site visit.

Federal resource agency additional information requests shall be within their area of expertise, commensurate to the level of impact, and agreed upon by the Corps. If additional information is requested, the agencies are allowed an additional 10 business days after receipt of this information to provide recommendations for modifications, mitigation or special conditions. Unless additional information is requested, the verbal notice must be confirmed with a written response to the appropriate Corps project manager at the VPO within an additional 10 working days from the date of the verbal comment.

The Corps may contact the applicant either by phone or in writing if there are concerns. If the applicant is unable to resolve the concerns or modify the project, the Corps may determine that a project is ineligible under this GP, "kickout" the project to the Individual Permit review category, and begin its Individual Permit review procedures. The Corps will send a "Kickout Letter" to the applicant and copy the VT ANR and the commenting Federal resource agency on any written correspondence to the applicant. The Corps may reinstate a project's eligibility under the GP provided concerns are satisfied.

The VT ANR within 10 business days of the date the project information is received from the Corps may require an Individual 401 WQC review for any Category 2 project. This 10-day notice to the Corps of the requirement for an individual 401 WQC review may be verbal and is not required to be fully documented, but must be directed to the appropriate Corps Project Manager at the VPO. The VT ANR must confirm the requirement for an individual 401 WQC review with a written response to the appropriate Corps project manager within an additional 10 working days from the date of the verbal comment. If the VT ANR does not notify the Corps as outlined herein, WQC is conditionally granted for the project. In order for the Corps GP authorization to be valid, the WQC must be obtained or waived prior to the commencement of work.

If the Corps and Federal resource agencies determine that the activity is eligible for the GP, the Corps will send an authorization letter directly to the applicant. The Corps will generally issue an eligibility determination within 60 days from the date of a complete application. If the Corps determines that the activity is not eligible under the GP or that additional information is required, the Corps will notify the applicant in writing and will send a copy of this notification to VT ANR.

Emergency Situation Procedures

Emergency situations are limited to sudden, unexpected occurrences that could potentially result in an unacceptable hazard to life, a significant loss of property, or an immediate, unforeseen, and significant economic hardship if corrective action requiring a permit is not undertaken within a time period less than the normal time needed to process an application under standard procedures. If an emergency situation requires action in less than 30 days after the occurrence, it qualifies for the amended notification procedures described below.

Notification Procedures for Emergency Situations: The Federal resource agencies, VT ANR and the VT SHPO will each designate an alternate to be contacted in the event the regular contact is unavailable. The VT ANR, VT Emergency Management (VTEM) or FEMA will notify the Corps within 24 hours of the occurrence of a disaster and advise the Corps of the nature of the occurrence and any known remedial and/or protective measures. The Corps will notify agency representatives that a disaster has occurred within one working day of being notified by the VT ANR, VTEM or FEMA.

When an application for Category 2 work is received that the Corps VPO determines is an "emergency" as defined above, the Corps will e-mail or fax a copy of the plans and DOE to the agency representatives and their alternates. The resource agencies would then have 16 working hours to notify the Corps if they have any comments on authorization of the project under the GP. Objections to the Corps determination of an "emergency" situation will not be accepted. If no response is received at the VPO within 16 working hours, the Corps will proceed with a decision on the application. If the resource agencies have comments on the proposal,

they will have 16 working hours to put their comments in writing. If written comments from the Federal agencies are not received at the VPO within 16 working hours, the Corps will proceed with a decision on the application.

If a Federal agency requests that an Individual Permit be required for a project or requests modifications to the project based on concerns within their area(s) of expertise, the Corps will notify the applicant within 8 working hours of receipt of that request that the project as proposed does not qualify for authorization under the GP and that an Individual Permit will be required. In any event, the Corps will notify the applicant within 48 working hours of commencement of the screening process as to whether the project may proceed under the GP.

IV. INDIVIDUAL PERMIT

Work that is in the Individual Permit category as listed in Appendix A, or that does not meet the terms and conditions of this GP, will require an application for an individual permit from the Corps of Engineers (see 33 CFR 325.1). The applicant should submit the appropriate application materials {including the Corps application form (ENG 4345)] at the earliest possible date to expedite the permit review process. General information and application forms can be obtained at our web site or by calling us (see Page 16). An Individual 401 WQC will be required from the appropriate VT resource agency(ies). Filing an Individual Permit application does not relieve the applicant from their obligation to obtain all necessary State approvals from the appropriate Vermont resource agency(ies) or any applicable local approvals.

V. GENERAL CONDITIONS (and supporting general information):

The following conditions apply to activities authorized under this GP, including all Category 1 (self-verification) and Category 2 (screening) activities:

General Requirements:

1. **Other Permits.** Authorization under this general permit does not obviate (i.e., to make unnecessary) the need to obtain other Federal, state, or local authorizations required by law.

2. **Federal Jurisdictional Boundaries.** Applicability of this GP shall be evaluated with reference to Federal jurisdictional boundaries. Applicants are responsible for ensuring that the boundaries depicted on permit drawings satisfy the Federal criteria defined at 33 CFR 328-329. See www.nae.usace.army.mil/regulatory>> Jurisdictional Limits and Wetlands for more information.

3. **Minimal Effects, Secondary (Indirect) and Cumulative Impacts.** (a) Projects authorized by this GP shall have no more than minimal individual and cumulative environmental impacts as determined by the Corps. Applicants must demonstrate that there will be no more than minimal direct and indirect impacts to the aquatic resource(s) resulting from the project. Mitigation may be required to offset unavoidable impacts. (b) Secondary impacts to waterway and/or wetland areas, (e.g., areas drained, flooded, cleared, excavated or fragmented) shall be added to the total fill area when determining the project review category (Category 1, 2 or Individual Permit review). Secondary and cumulative impacts are defined at Appendix A, Endnote 4.

4. **Discretionary Authority.** Notwithstanding compliance with the terms and general conditions of this GP, the Corps retains discretionary authority to require either a Category 2 or an Individual Permit review based on concerns for the aquatic environment or for any other factor of the public interest (33 CFR 320.4(a)). This authority is invoked on a case-by-case basis whenever the Corps determines that the potential impacts of the proposal warrant either a Category 2 or an Individual Permit review based on the concerns stated above. This authority may be invoked for projects with cumulative environmental impacts that are more than minimal or if there is a special resource or concern associated with a particular project that is not already covered by the remaining conditions of the GP and that warrants greater review. Whenever the Corps notifies an applicant that either a Category 2 or Individual Permit review is required, authorization under this GP is void and no work may be conducted until the Corps issues the required authorization or until the Corps notifies the applicant that further review has demonstrated that the work may proceed under this GP.

5. **Single and Complete Projects.** This GP shall not be used for piecemeal work and shall be applied to single and complete projects. All components of a single project and/or all planned phases of a multi-phased project shall be treated together as constituting one single and complete project, unless the Corps determines that a component has independent utility. For linear projects, such as power lines or pipelines with multiple crossings, the "single and complete project" (i.e., single and complete crossing) will apply to each crossing of a separate water of the U.S. (i.e., single waterbody) at that location; except that for linear projects crossing a single waterbody several times at separate and distant locations, each crossing is considered a single and complete project, and may be reviewed for Category 1 eligibility. However, individual channels in a braided stream or river, or individual arms of a large, irregularly-shaped wetland or lake, etc., are not separate waterbodies. If any crossing requires a Category 2 activity, then the entire linear project shall be reviewed as one project under Category 2 provided that the impact thresholds in Appendix A are met. Also, this GP shall not be used for any activity that is part of an overall project for which an Individual Permit is required, unless the Corps determines the activity has independent utility. Note that modifications to State permits do not constitute a separate project. Modifications which involve Corps jurisdiction will be screened at the regular screening in order to ascertain compliance with the GP. Keep in mind that a linear project normally qualifying as a Category 1 project will trigger a Corps review if the impacts exceed this GP's general conditions.

6. Permit On-Site. For Category 2 projects, the permittee shall ensure that a copy of this GP and any accompanying authorization letter with attached plans are at the site of the work authorized by this GP whenever work is being performed and that all construction personnel are aware of its terms and conditions. The entire permit authorization shall be made a part of any and all contracts and sub-contracts for work that affects areas of Corps jurisdiction at the site of the work authorized by this GP. This shall be achieved by including the entire permit authorization in the specifications for work. The term "entire permit authorization" means this GP and the authorization letter (including its drawings, plans, appendices and other attachments) and also includes permit modifications. If the authorization letter is issued after the construction specifications, but before receipt of bids or quotes, the entire permit authorization shall be included as an addendum to the specifications. If the authorization letter is issued after receipt of bids or quotes, the entire permit authorization shall be included in the contract or sub-contract. Although the permittee may assign various aspects of the work to different contractors or sub-contractors, all contractors and sub-contractors shall be obligated by contract to comply with all environmental protection provisions contained within the entire GP authorization, and no contract or sub-contract shall require or allow unauthorized work in areas of Corps jurisdiction.

General Conditions Related to National Concerns:

7. Historic Properties. Any activity authorized by this GP shall comply with Section 106 of the National Historic Preservation Act. Information on the location and existence of historic resources can be obtained from the VT SHPO (See page 16) and the National Register of Historic Places. Project proponents shall apply to the Corps for all projects that would otherwise qualify for Category 1 if there is the potential for an effect on a historic property within the permit area or any known historic property that may occur outside the permit area. Historic properties include those that are eligible for inclusion, but not necessarily listed on the National Register. If the permittee, during construction of work authorized herein, encounters a previously unidentified archaeological or other cultural resource within the area subject to Corps jurisdiction that might be eligible for listing in the National Register of Historic Places, he/she shall stop work and immediately notify the Corps, the VT SHPO and, when work is proposed in Addison, Rutland or Bennington counties, the Stockbridge-Munsee Native American tribe.

8. National and Corps Lands. Activities authorized by this GP shall not impinge upon the value of any National Wildlife Refuge, National Forest, National Park or any other area administered by the U.S. FWS, U.S. Forest Service, or National Park Service. No Category 1 work is allowed on Corps properties and Corps-controlled easements (see Appendix A, Endnote 9).

9. Federal and State Endangered Species.

a. No activity may be authorized under this GP which:

- May affect a threatened or endangered species, a proposed species, designated critical habitat, or proposed critical habitat as identified under the Federal Endangered Species Act (ESA),
- Would result in a "take" of any Federally listed threatened or endangered species of fish or wildlife, or
- Would result in any other violation of Section 9 of the ESA protecting threatened or endangered species of plants.

b. Proponents for Category 1 and 2 projects shall ensure there are no impacts to Federally-listed threatened or endangered species or critical habitat and should ensure that there are no impacts to State threatened or endangered species.

c. Proponents for Category 1 and 2 projects shall notify the Corps if any of the actions in 9a may occur and if any Federally listed threatened or endangered species or critical habitat, or proposed species or critical habitat, is in the project area or may be impacted by the project. For Category 1 projects, the Corps may then notify the proponent that the project will be reviewed under the Category 2 or Individual Permit procedures and if so the proponents shall not begin work until the Corps issues a written authorization.

d. Applicants should also provide information on state threatened and endangered species. The Information Typically Required section on Page 3 provides guidance. Contact information for the VT ANR, Department of Fish & Wildlife, Nongame and Natural Heritage program is provided on Pages 16-17, and more information is provided at Additional References, Pages 18-19.

10. Essential Fish Habitat (EFH). As part of the GP screening process, the Corps will coordinate with the NMFS in accordance with the 1996 amendments to the Magnuson-Stevens Fishery, Conservation and Management Act (MSFCMA) to protect and conserve the habitat of marine, estuarine and anadromous finfish, mollusks, and crustaceans. This habitat is termed EFH and is broadly defined to include "those waters and substrate necessary to fish for spawning, breeding, feeding, or growth to maturity." Any work in the following streams in the Connecticut River watershed that are stocked with Atlantic salmon shall not be authorized under Category 1 of this GP and must be screened for potential impacts to EFH. For additional EFH information and/or locations, see 50 CFR 600 (www.nmfs.noaa.gov), www.nero.nmfs.gov/RO/DOC/appguide1.html or contact NMFS (see Page 16).

- Black River (from its mouth in Springfield to its headwaters)
- Connecticut River
- Deerfield River
- Nulhegan River
- Ompompanoosuc River
- Ottauquechee River
- Passumpsic River
- Paul Stream
- Saxtons River
- Stevens River
- Wells River
- West River
- White River
- Williams River

11. Wild and Scenic Rivers. Any activity that occurs in the designated main stem of, within 0.25 mile up or downstream of the designated main stem of, or in tributaries within .25 miles of the designated main stem of a National Wild and Scenic River, or in "bordering and contiguous wetlands" (see Appendix A, Endnote 1) that are adjacent to the designated main stem of a National Wild and Scenic River, or that has the potential to alter flows within a river within the National Wild and Scenic River System, is not eligible for Category 1 regardless of size of the impacts. This condition applies to both designated Wild and Scenic Rivers and rivers officially designated by Congress as study rivers for possible inclusion while such rivers are in an official study status. Currently there are no designated National Wild and Scenic Rivers in Vermont. The Missisquoi River, from its headwaters in Lowell to the Canadian border in Troy (25 miles) and from the Canadian border in East Richford to Enosburg Falls (25 miles) and the Trout River have been officially designated by Congress as study rivers.

12. Federal Navigation Project. Any structure or work that extends closer to the horizontal limits of any Corps navigation project than a distance of three times the project's authorized depth shall be subject to removal at the owner's expense prior to any future Corps dredging or the performance of periodic hydrographic surveys.

13. Navigation. (a) There shall be no unreasonable interference with navigation by the existence or use of the activity authorized herein, and no attempt shall be made by the permittee to prevent the full and free use by the public of all navigable waters at or adjacent to the activity authorized herein. (b) The permittee understands and agrees that if future operations by the U.S. require the removal, relocation or other alteration of the structure or work herein authorized, or if, in the opinion of the Secretary of the Army or his authorized representative, said structure or work shall cause unreasonable obstruction to the free navigation of the navigable waters, the permittee will be required, upon due notice from the Corps, to remove, relocate or alter the structural work or obstructions caused thereby, without expense to the U.S. No claim shall be made against the U.S. on account of any such removal or alteration.

14. Federal Liability. In issuing this GP, the Federal Government does not assume any liability for the following: (a) damages to the permitted project or uses thereof as a result of other permitted or unpermitted activities or from natural causes; (b) damages to the permitted project or uses thereof as a result of current or future activities undertaken by or on behalf of the U.S. in the public interest; (c) damages to persons, property or to other permitted or unpermitted activities or structures caused by the activity authorized by the GP; (d) design or construction deficiencies associated with the permitted work; (e) damage claims associated with any future

modification, suspension or revocation of this permit.

Minimization of Environmental Impacts:

15. Avoidance, Minimization and Mitigation. Discharges of dredged or fill material into waters of the U.S. and any secondary impacts shall be avoided and minimized to the maximum extent practicable. Mitigation of unavoidable direct and indirect impacts may be required on a case-by-case basis.

16. Heavy Equipment in Wetlands. Heavy equipment other than fixed equipment (drill rigs, fixed cranes, etc.) working in wetlands shall not be stored, maintained or repaired in wetlands, unless it is less environmentally damaging otherwise, and as much as possible shall not be operated there. Where construction requires heavy equipment operation in wetlands, the equipment shall either have low ground pressure (typically <3 psi), or shall not be located directly on wetland soils and vegetation; it shall be placed on construction mats or corduroy roads (defined at Appendix A, Endnote 16) that are adequate to support the equipment in such a way as to minimize disturbance of wetland soil and vegetation. Construction mats are to be placed in the wetland from the upland or from equipment positioned on swamp mats if working within a wetland. Dragging construction mats into position is prohibited. Construction mats shall be managed in accordance with the Construction Mat Best Management Practices (BMPs) (Appendix A, Endnote 20). Other support structures that are less impacting and are capable of safely supporting equipment may be used with written Corps authorization. Similarly, not using mats during frozen, dry or other conditions may be allowed with written Corps authorization. (See GC 17 below.) An adequate supply of spill containment equipment shall be maintained on site. Corduroy roads and construction mats are considered as fill whether they're installed temporarily or permanently.

17. Temporary Fill. No temporary fill shall be placed in waters of the U.S., including wetlands, unless a) it is specifically authorized in writing by the Corps, or b) the project qualifies for the non-reporting Category 1 (the combined temporary and permanent fill totals less than 3,000 SF, it meets the Appendix A Category 1 definition, and it is in compliance with this GP's terms and general conditions).

- All temporary fill shall be stabilized to prevent its eroding into portions of waters of the U.S. where it is not authorized.
- Waters of the U.S. where temporary fill was discharged shall be restored (see GC 18).
- Unconfined temporary fill authorized for discharge into waters of the U.S. shall consist of material that minimizes impacts to water quality (e.g. sandbags or clean gravel and/or stone).
- Temporary fill authorized for discharge into wetlands shall be placed on geotextile fabric laid on the pre-construction wetland grade. Construction mats are excluded from this requirement.
- Temporary fill shall be removed as soon as it is no longer needed, and it shall be disposed of at an upland site and suitably contained to prevent its subsequent erosion into waters of the U.S.
- Construction mats and corduroy roads (see GC 16) are considered as temporary fill when they are removed immediately upon work completion. The areas must be restored in accordance with GC 18.
- If temporary fill is staged and then returned to its original location, e.g., sewer projects through wetlands, the original location shall be restored.

18. Work Site Restoration.

- Upon completion of construction, all disturbed wetland areas (the disturbance of these areas must be authorized) shall be properly stabilized. Any seed mix shall contain only plant species native to New England and shall not contain any of the plant species listed in Appendix B - "Invasive Species and Other Unacceptable Plant Species" in the "Mitigation Guidance for New England District Mitigation Plan Checklist," provided at http://www.nae.usace.army.mil/Regulatory/Mitigation/CompensatoryMitigationGuidance.pdf and referenced in the Planting Plan section. This list may be updated periodically.

- The introduction of non-native invasive and noxious species in disturbed areas is prohibited and any spread of such invasive plant species shall be controlled. See Additional References on Pages 18-19. The Corps lists these species in the above mentioned checklist in the Invasive and Noxious Species section.
- In areas of authorized temporary disturbance, if trees are cut they shall be cut at ground level and not uprooted in order to prevent disruption to the wetland soil structure and to allow stump sprouts to revegetate the work area, unless otherwise authorized.
- Wetland areas where permanent disturbance is not authorized shall be restored to their original condition and elevation, which under no circumstances shall be higher than the pre-construction elevation. Original condition means careful protection and/or removal of existing soil and vegetation, and replacement back to the original location such that the original soil layering and vegetation schemes are approximately the same, unless otherwise authorized.

19. Bank Stabilization. Projects involving construction or reconstruction/maintenance of bank stabilization structures within Corps jurisdiction should be designed to minimize environmental effects, effects to neighboring properties, etc. to the maximum extent practicable. Applicants must use the least intrusive method to stabilize the bank, following this sequential minimization process: avoidance, diversion of overland flow, vegetative stabilization, stone-sloped surfaces, and walls. Vertical walls/bulkheads must only be used in situations where reflected wave energy can be tolerated. This generally eliminates bodies of water where the reflected wave energy may interfere with or impact on harbors, marinas, or other developed shore areas. Refer to Additional References on Pages 18-19.

20. Sedimentation and Erosion Control. Adequate sedimentation and erosion control management measures, practices and devices, such as phased construction, vegetated filter strips, geotextile silt fences or other devices, shall be installed and properly maintained to reduce erosion and retain sediment on-site during and after construction. Such measures shall be capable of preventing erosion, of collecting sediment, suspended and floating materials, and of filtering fine sediment. The temporary devices shall be removed upon completion of work and the disturbed areas shall be stabilized. The sediment collected by these devices shall be removed and placed at an upland location, in a manner that will prevent its later erosion into a waterway or wetland. All exposed soil and other fills shall be permanently stabilized at the earliest practicable date.

21. Waterway/Wetland Work and Crossings

(a) All temporary and permanent crossings of waterbodies shall be suitably culverted, bridged, or otherwise designed to withstand and to prevent the restriction of high flows, to maintain existing low flows, and to not obstruct the movement of aquatic life indigenous to the waterbody beyond the actual duration of construction.

(b) No activity may substantially disrupt the necessary life-cycle movements of those species of aquatic life indigenous to the waterbody, including those species that normally migrate through the area, unless the activity's primary purpose is to impound water.

(c) To meet the objective of aquatic organism passage in (a) and (b) above, all temporary and permanent crossings of rivers, streams, brooks, etc. (hereon referred to as "streams") shall meet the following performance standards in order to qualify for Category 1 (refer to Additional References on Pages 18-19):

i. Design the structure to maintain a streambed composition and form throughout the culvert similar to and continuous with the adjacent reaches. To do this:

- o Design and install streambed material and bedforms if not adequately supplied and developed naturally,
- o Design profile and alignment through structure similar to those of adjacent stream reaches,
- o Design culvert elevation to remain embedded for the life of the structure and in consideration of future channel conditions.

ii. Maintain velocities, turbulence and depths within the structure similar to those found in adjacent stream reaches across a range of desired flows.

(d) The requirements to comply with the performance standards in (c) above in order to proceed as a Category 1 project do not apply to the following:

i. Temporary crossings in place for less than 90 days (the requirements in (a) do apply). Temporary culverts must be embedded unless they're installed during low flow (Jul. 15 – Oct. 1) and it's placed on geotextile fabric laid on the stream bed to ensure restoration to the original grade;

ii. Constructed drainage systems designed primarily for the conveyance of storm water or irrigation. Also, non-tidal drainage and irrigation ditches excavated on dry land are not Federally-regulated.

(e) Applicants proposing new crossings, or maintenance or replacement of serviceable crossings should refer to the Guidelines for the Design of Stream/Road Crossings for Passage of Aquatic Organisms in Vermont. Refer to Additional References on Pages 18-19.

(f) Applicants shall use the least intrusive and environmentally damaging method to construct the stream crossing, following this sequential minimization process: bridge spans, open bottom arches or embedded culverts. Refer to Additional References, Pages 18-19.

(g) Culverts at waterbody crossings shall be installed in such a manner as to preserve hydraulic connectivity, at its present level, between the wetlands on either side of the road. The permittee shall take necessary measures to correct wetland damage due to lack of hydraulic connectivity.

(h) Projects using retrofit methods increasing flow velocity or slip lining (retrofitting an existing culvert by inserting a smaller diameter pipe) are not allowed in Category 1, either as new or maintenance activities.

(i) No projects involving open trench excavation in flowing waters, except riprap installation, are allowed under Category 1. Open trench excavation projects may qualify for Category 1 provided (1) the work doesn't occur in flowing waters (requires using management techniques such as temporary flume pipes, culverts, cofferdams, etc.) and (2) normal flows are maintained within the stream boundary's confines (see Appendix A, Endnote 6). Projects utilizing these management techniques must meet the other Category 1 requirements (see Appendix A, Page 1) and all of this GP's terms and general conditions.

(j) For projects that otherwise meet the terms of Category 1, in-stream (e.g., rivers, streams, brooks, etc.) construction work shall be conducted only during the low flow period of July 15 to October 1 in any year. Projects that are conducted outside that time period are ineligible for Category 1 and shall be reviewed under Category 2, regardless of the waterway and wetland fill and/or impact area.

(k) Work impacting upstream or downstream flood profiles must be reviewed under Category 2.

22. Discharge of Pollutants.

(a) All activities involving a discharge into waters of the U.S. authorized under this GP shall be consistent with applicable water quality standards, effluent limitations, standards of performance, prohibitions, and pretreatment standards and management practices established pursuant to the CWA (33 USC 1251) and applicable State and local laws. If applicable water quality standards, limitations, etc., are revised or modified during the term of this GP, the authorized work shall be modified to conform to these standards within six months of the effective date of such revision or modification, or within a longer period of time deemed reasonable by the Corps in consultation with the EPA.

(b) All projects authorized by this GP shall be designed, constructed and operated to minimize or eliminate the discharge of pollutants. Category 2 projects will be reviewed to determine if a project may result in a discharge of relevant pollutants to an impaired water. See the Additional Information Required section on Page 4.

(c) Unless otherwise notified by the VT ANR, applicants may presume that the Section 401 WQC for this GP constitutes the Section 401 WQC for their Section 404 activity, provided the terms and conditions of this GP are met.

23. Floodplain Work.

(a) In order to qualify for authorization under Category 1 of this GP, projects shall result in no more than a minimal decrease in natural valley storage, and shall not result in an increase in the base flood elevation (where hydraulic information necessary to make this determination is available).

(b) There shall be no Category 1 projects located within a FEMA designated Special Flood Hazard Area as shown on the most current flood insurance studies and maps published by FEMA and adopted by the municipality within which the proposed project is located.

(c) Any project located within a FEMA designated Special Flood Hazard Area shall comply with minimum NFIP regulations, or local Flood Hazard Area regulations if more restrictive.
Note: Refer to Additional References, Pages 18-19.

24. Spawning and Breeding Areas. Discharges of dredged or fill material, and/or suspended sediment producing activities in fish and shellfish spawning or nursery areas, or amphibian and migratory bird breeding areas, during spawning or breeding seasons shall be avoided. Impacts on these areas shall be minimized to the maximum extent practicable during all times of year.

25. Storage of Seasonal Structures. Seasonal or recreational structures such as pier sections, floats, etc., that are removed from the waterway for a portion of the year shall be stored in an upland location, located above ordinary high water and not in a wetland.

26. Environmental Functions and Values. (a) The permittee shall make every reasonable effort to carry out the construction or operation of the work authorized herein in a manner that minimizes adverse impacts on fish, wildlife and natural environmental values. (b) The introduction of invasive plant species identified by any Federal agency in disturbed areas is prohibited and any spread of such invasive plant species shall be controlled. Refer to GC 18 and Additional References on Pages 18-19.

27. Protection of Special Aquatic Sites and Special Wetlands, including Vernal Pools.
Special Aquatic Sites (SAS): Projects with any temporary or permanent fill in SAS (Endnote 7), or that could adversely affect SAS, whether directly or indirectly, do not qualify for Category 1. This does not apply to "inland wetlands," but does apply to the other SAS types listed at Endnote 7.
Special Wetlands: When jurisdiction is triggered (see Activities Covered, Page 1), projects in or that could adversely affect Special Wetlands (Endnote 8), whether directly or indirectly, do not qualify for Category 1. Special wetlands are vernal pools, bogs, fens, and wetlands which provide habitat for threatened or endangered species as designated by the State of Vermont Natural Heritage Program. See Additional References on Pages 18-19 for additional references.
Vernal Pools (VP): These are a type of special wetland (Endnote 8). Category 1 excludes projects in or within 200' of a VP on the property when jurisdiction is triggered. This does not apply to temporary impacts associated with construction mats in previously disturbed areas of existing utility project right-of-ways (e.g., transmission lines, gas pipelines) or linear transportation projects (e.g., roads, highways, railways, trails, airport runways and taxiways) provided there is a Vegetation Management Plan or equivalent BMPs that avoid, minimize and mitigate impacts to aquatic resources. The applicant must minimize surrounding upland impacts to the greatest extent practicable, with the effort to minimize impacts being commensurate with the value of the pool. Impact minimization should be in accordance with *Best Development Practices: Conserving pool-breeding amphibians in residential and commercial development in the northeastern U.S.*, Calhoun and Klemens, 2002; and *Science and Conservation of Vernal Pools in Northeastern North America*, Calhoun and deMaynadier, 2008, specifically Chapter 12, Conservation Recommendations section, Page 241. (See Additional References, Pages 18-19). For example, site clearing, grading and construction activities should be limited to <25% of the VP terrestrial habitat, and roads and driveways should be excluded from the VP envelope. For Category 2 projects, the applicant shall delineate all VPs on the property (see GC 2). The Corps may waive this requirement on a case-by-case basis.

28. Fluvial Geomorphic Processes. (a) Wherever practicable, projects should be designed to accommodate the natural tendencies of the fluvial system. This should greatly enhance the likelihood of long-term success of the project and minimize the chance of exacerbating an otherwise undesirable physical adjustment process. Recognition of these processes requires assessment of physical parameters and characteristics of the watershed, the water and sediment regimes, the channel and floodplain, the anthropogenic influences and constraints on the reach concerned and to what extent sediment transport continuity in the reach can be attained. (b) Applicants should consult with the VT River Management Program Stream Alteration Engineer for assistance in compliance with this condition.

Note: Refer to Additional References on Pages 18-19 for additional information.

Procedural Conditions:

29. Inspections. The permittee shall allow the Corps to make periodic inspections at any time deemed necessary in order to ensure that the work is being or has been performed in accordance with the terms and conditions of this permit. The Corps may also require post-construction engineering drawings for completed work, and post-dredging survey drawings for any dredging work.

30. Maintenance. (a) The permittee shall maintain the work authorized herein in good condition and in conformance with the terms and general conditions of this permit. Permittees must contact the Corps if maintenance will not take place or if they want to modify the existing project design. (b) The requirement to maintain the authorized work does not include maintenance of dredging projects. Maintenance dredging is subject to the review thresholds in Appendix A and/or any special conditions included in a written Corps authorization. Note: Refer to Additional References on Pages 18-19 for information on maintaining stream restoration projects.

31. Property Rights. This GP does not convey any property rights, either in real estate or material, or any exclusive privileges, nor does it authorize any injury to property or invasion of rights or any infringement of federal, state, or local laws or regulations.

32. Modification, Suspension, and Revocation. This GP may be either modified, suspended, or revoked in whole or in part pursuant to the policies and procedures of 33 CFR 325.7. Any such action shall not be the basis for any claim for damages against the U.S.

33. Restoration. The permittee, upon receipt of a notice of revocation of authorization under this GP, shall restore the wetland or waterway to its former conditions without expense to the U.S., and as directed by the Secretary of the Army or his authorized representative. If the permittee fails to comply with such a directive, the Secretary or his designee may restore the wetland or waterway to its former condition, by contract or otherwise, and recover the cost from the permittee.

34. Special Conditions. The Corps may impose other special conditions on a project authorized pursuant to this GP that are determined necessary to minimize adverse navigational and/or environmental effects or based on any other factor of the public interest. Failure to comply with all conditions of the authorization, including special conditions, constitutes a permit violation and may subject the permittee to criminal, civil or administrative penalties and/or restoration.

35. False or Incomplete Information. If the Corps makes a determination regarding the eligibility of a project under this GP, and subsequently discovers that it has relied on false, incomplete, or inaccurate information provided by the permittee, the GP authorization shall not be valid and the U.S. Government may institute legal proceedings.

36. Abandonment. If the permittee decides to abandon the activity authorized under this GP, unless such abandonment is merely the transfer of property to a third party, he/she may be required to restore the area to the satisfaction of the Corps.

37. Transfer of GP Verifications. If the permittee sells the property associated with a GP verification, the permittee may transfer the GP verification to the new owner by submitting a letter to the Corps (see Page 16 for address) to validate the transfer. A copy of the GP verification must be attached to the letter and the letter must contain the following statement and signature: "When the structures or work authorized by this GP are still in existence at the time the property is transferred, the terms and conditions of this GP, including any special conditions, will continue to be binding on the new owner(s) of the property. To validate the transfer of this GP

and the associated liabilities associated with compliance with its terms and conditions, have the transferee sign and date below."

38. Enforcement cases. This GP does not apply to any existing or proposed activity in Corps jurisdiction associated with a Corps or EPA enforcement action, until such time as the enforcement action is resolved or the Corps or EPA as appropriate determines that the activity may proceed independently without compromising the enforcement action.

Duration of Authorization/Grandfathering:

39. Duration of Authorization. Activities authorized under this GP that have commenced (i.e., are under construction) or are under contract to begin construction in reliance upon this authorization, will remain authorized provided the activity is completed within twelve months of the expiration date on this permit, unless:

a) the GP is either modified or revoked; or
b) discretionary authority has been exercised in accordance with 33 CFR 325.2(e)(2).

Activities authorized and completed under Category 1 or 2 of this GP will continue to remain authorized after this GP's expiration date.

40. Previously Authorized Activities.
(a) Projects that received written authorization from the Corps and that were completed under the previous GP's, nationwide permits, regional general permits or letters of permission, shall remain authorized as specified in each authorization letter.
(b) Activities authorized pursuant to 33 CFR 330.3 ("Activities occurring before certain dates") are not affected by this GP.

12-6-2012

Frank J. DelGiudice — DATE
Chief, Permits and Enforcement Branch

VI. CONTACTS FOR VERMONT GENERAL PERMIT:

U.S. Army Corps of Engineers
New England District, Regulatory Division
Vermont Project Office
8 Carmichael Street, Suite 205
Essex Junction, Vermont 05452
(802) 872-2893, (802) 879-7638 fax
www.nae.usace.army.mil/reg/index.htm

U.S. Environmental Protection Agency
New England Region
Wetland Protection Program Unit – OEP/CWP
JFK Federal Building 1 Congress Street, Suite 1100
Boston, MA 02114-2023
(617) 918-1399

Federal Endangered Species:
U.S. Fish and Wildlife Service
Federal Activities/Endangered Species
70 Commercial Street, Suite 300
Concord, New Hampshire 03301-5087
(603) 223-2541
www.fws.gov/northeast/newenglandfieldoffice.htm

Essential Fish Habitat:
National Marine Fisheries Service
Habitat Conservation Division (HCD)
One Blackburn Drive
Gloucester, Massachusetts 01930
(978) 281-9300

National Park Service
National Park Service
North Atlantic Region
15 State Street
Boston, Massachusetts 02109
(617) 223-5191

Historic Resources
State Historic Preservation Officer
Division for Historic Preservation
National Life Building
Drawer 20
Montpelier, Vermont 05620-0501
(802) 828-3211

Tribal Historic Preservation Officer
c/o Stockbridge-Munsee Community
P.O. Box 70
Bowler, Wisconsin 54416
(715) 793-3970
Area of concern: Addison, Rutland and Bennington Counties

Vermont Agency of Natural Resources

Department of Environmental Conservation
Wetlands Program
Watershed Management Division
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Alan.quackenbush@state.vt.us

Department of Environmental Conservation
River Management Program
Watershed Management Division
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Mike.kline@state.vt.us

Department of Environmental Conservation
Lakes and Ponds Program
Watershed Management Division
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Susan.warren@state.vt.us

Department of Environmental Conservation
Dam Safety Program
Facilities Engineering Division
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Steve.bushman@state.vt.us

Vermont Department of Fish and Wildlife
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
Rich.kirn@state.vt.us

State endangered species
Vermont Department of Fish and Wildlife
Nongame and Natural Heritage Program
1 National Life Drive, Main 2
Montpelier, VT 05620-3522
www.vtfishandwildlife.com/wildlife_nongame.cfm.

VII. ADDITIONAL REFERENCES:

Page 4: Application. Refer to www.nae.usace.army.mil for a more comprehensive checklist. Select "Regulatory" "Permits" "Forms" and then "Application and Plan Guideline Checklist."

Page 4 & GC 9: Threatened and Endangered Species.
The VT F&W provides information on Federal and State species:
www.vtfishandwildlife.com/wildlife_nongame.cfm.
The VT ANR Environmental Interest Locator provides an interactive web based GIS map with documented locations:
http://maps.vermont.gov/imf/sites/ANR_NATRESViewer/jsp/launch.jsp.
The U.S. Fish and Wildlife Service (U.S. FWS) provides information on Federal endangered species:
www.fws.gov/ northeast/newenglandfieldoffice/EndangeredSpec-Consultation_Project_Review.htm.

Page 4 and GC 22: Discharge of Pollutants - Impaired Waters and Stormwater Impaired Waters: The VT ANR lists and shows impaired waters and stormwater impaired waters at:
www.vtwaterquality.org/planning.htm.

GC 2: Federal Jurisdictional Boundaries.
(a) Corps Wetlands Delineation Manual, regional supplements, and Corps Wetland Delineation Data Sheets: www.nae.usace.army.mil/regulatory and then "Wetlands and Jurisdictional Limits.
(b) The National List of Plant Species that Occur in Wetlands (http://wetland_plants.usace.army.mil).
(c) The Natural Resources Conservation Service (NRCS) publishes the current hydric soil definition, criteria and lists: http://soils.usda.gov/use/hydric. For the Field Indicators for Identifying Hydric Soils in N.E., see www.neiwpcc.org/hydricsoils.asp.

GCs 18 and 26: Invasive Species.
(a) Information on what are considered "invasive species" is provided in our "Compensatory Mitigation Guidance" document at www.nae.usace.army.mil/regulatory under "Mitigation." The "Invasive Species" section has a reference to our "Invasive Species Control Plan (ISCP) Guidance" document, located at www.nae.usace.army.mil/regulatory under "Invasive Species," which provides information on preparing an ISCP.
(b) The June 2009 "Corps of Engineers Invasive Species Policy" is at www.nae.usace.army.mil/regulatory under "Invasive Species" and provides policy, goals and objectives.

GC 19: Bank Stabilization.
Corps Coastal Engineering Manual: Select "Products/Services" and then "Publications." Part 5, Chapter 7-8, a(2)c is particularly relevant. http://chl.erdc.usace.army.mil.

GC 21: Waterway/Wetland Work and Crossings
21(c): Performance standards in GC 21 are taken from Section 8 - Alternative Designs, in the document "Guidelines for the Design of Stream/Road Crossings for Passage of Aquatic Organisms in Vermont." These Guidelines are located at www.vtfishandwildlife.com/library.cfm, "Reports and Documents." This document should be referenced when designing and constructing stream crossing projects to help ensure compliance with GC 21 (a) - (c).

GC 23: Flood Hazard Management. www.anr.state.vt.us/dec/waterq/rivers/htm/rv_floodhazard.htm.

GC 27: Special Wetlands.
Refer to the VT ANR Environmental Interest Locator, which provides an interactive web based GIS map with locations of significant (wetland) natural communities. At the Locator select map layers, fish and wildlife, and

then significant natural communities:

http://maps.vermont.gov/imf/sites/ANR_NATRESViewer/jsp/launch.jsp. Some wetlands are more valuable and sensitive to fragmentation, non-point source runoff, and other secondary impacts. Upland buffers are especially essential to protect their functions.
The following documents provide conservation recommendations for vernal pools:
Best Development Practices: Conserving pool-breeding amphibians in residential and commercial development in the northeastern U.S., Calhoun and Klemens, 2002. Chapter III, Management Goals and Recommendations, Pages 15 – 26, is particularly relevant. (Available for purchase at www.maineaudubon.org/resource/index.shtml and on Corps website*.)
Science and Conservation of Vernal Pools in Northeastern North America, Calhoun and deMaynadier, 2008. Chapter 12, Conservation Recommendations section, Page 241, is particularly relevant. (Available for purchase via the internet. Chapter 12 is available on Corps website*.)

* www.nae.usace.army.mil/regulatory under "Vernal Pools."

Cape Cod Curbing: For smaller roads and driveways, the most important design feature to consider is curbing. Granite curbs and some traditional curbing can act as a barrier to amphibian and hatchling turtle movements. Large numbers of salamanders have been intercepted in their migrations by curbs and catch basins. Use of Cape Cod curbs rather than traditional curbing may be one solution. Alternatively, where storm water management systems require more traditional curbing, it may be possible to design in escape ramps on either side of each catch basin.

The Vernal Pool Directional Buffer Guidance document is located at www.nae.usace.army.mil/regulatory under: 1) "State General Permits" and then "Maine," and 2) "Vernal Pools."

GC 28: Fluvial Geomorphic Processes. Consult with the VT River Management Program Stream Alteration Engineer for assistance in compliance with GC 28. Refer to information provided at: www.anr.state.vt.us/dec/waterq/rivers/htm/rv_management.htm.

GC 30: Maintenance. River restoration projects that are designed to accommodate the natural dynamic tendencies of the fluvial system are maintained in accordance with the project's design objectives (Category 1) or the Corps authorization letter (Category 2). These projects are generally designed to support and implement channel assessment and management practices that recognize a stream's natural dynamic tendencies.

APPENDIX A: DEFINITION OF CATEGORIES

I. WATERS OF THE U.S. (INCLUDES WETLANDS) (other than Lake Champlain, Lake Memphremagog, Wallace Pond and adjacent wetlands)	**Waters of the U.S.[1] are comprised of Inland Waters and Wetlands[2] & Navigable Waters of the U.S.[3].** Navigable waters in Vermont are those designated as navigable by Congress (33 CFR 329). This section excludes the following navigable waters: Lake Champlain, Lake Memphremagog, Wallace Pond & wetlands adjacent to these waterbodies (See II. Navigable Waters below).		
	Projects not meeting Category 1 must apply to the Corps as either a Category 2 or Individual Permit project. All Category 1 and 2 projects must comply with all of this GP's applicable terms (Pages 1 – 6) and general conditions (GC) (Pages 7 – 16).		
	CATEGORY 1	**CATEGORY 2**	**INDIVIDUAL PERMIT**
(a) NEW FILL/ EXCAVATION DISCHARGES	<3,000 SF of waterway and/or wetland fill and secondary impacts[4], (e.g., areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent fill, and certain excavation discharges (except for incidental fallback[5]). Construction mats[16] and corduroy roads are considered as fill (see GC 16). Construction mats of any area necessary to conduct activities that were previously authorized, authorized under Category 1, or not subject to regulation. Authorized construction mats must be in place for no more than 3 months, removed immediately upon work completion, and the wetlands must be restored (see GC 18). Provided: • In-stream (e.g., rivers, streams, brooks, etc.) work limited to Jul 15-Oct 1 (see GC 21). This category excludes: • Fills in Athens, Brookline, Chester, Dummerston, Grafton, Newfane, Putney, Rockingham, Springfield, Townshend, or Westminster, VT. • Fills below OHW in EFH waters (see GC 10). • Activities excluded in GC 21, i.e., dams, dikes, or activities involving water diversions[6] (other than dry hydrants used exclusively for firefighting activities with no stream impoundments); and sliplining. • Work in special aquatic sites (SAS)[7] other than wetlands. • Work in special wetlands[8] including work in vernal pools (VP) or within 200' of the VP's edge when jurisdiction is triggered. (This does not apply to temporary impacts associated with construction mats in previously disturbed areas of existing utility project right-of-ways (e.g.,	3,000 SF to 1 acre waterway and/or wetland fill and secondary impacts[4], (e.g., areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent fill & certain excavation discharges (except for incidental fallback[5]). Construction mats and corduroy roads are considered as fill (see GC 16). Construction mats used for new construction activities with impacts of any size ≥3,000 SF (see GCs 16 & 17). Projects sponsored by a Federal or State agency with proactive restoration[10] as a primary purpose and impacts of any size ≥3,000 SF. Net impacts must not be greater than minimal. Restoration and/or enhancement approved for use by a Corps-approved In-Lieu Fee program or Corps-approved mitigation bank, with impacts of any size ≥3,000 SF. Specific activities with impacts ≥3,000 SF required to affect the containment, stabilization, or removal of hazardous or toxic waste materials performed, ordered or sponsored by a government agency with established legal or regulatory authority. Wetlands must be restored in place. Work in special wetlands[8], including work in VPs or within 200' of the VP's edge when jurisdiction is triggered on the property. The applicant shall delineate all special wetlands[8] including VPs on the property using Federal delineation methods (see GC 2). The Corps may waive these	≥1 acre waterway and/or wetland fill & secondary impacts[4] (e.g., area drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent fill (except construction mats meeting Category 1 or Category 2 requirements) and certain excavation discharges (except for incidental fallback[5]).

	transmission lines, gas pipelines) or linear transportation projects (e.g., roads, highways, railways, trails, airport runways and taxiways) provided there is a Vegetation Management Plan or equivalent BMPs that avoid, minimize and mitigate impacts to aquatic resources.) • Work on Corps properties & Corps-controlled easements[9]. • Structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River. • Fills below OHW of the Trout River.	delineation requirements on a case-by-case basis. Wetland fill and/or secondary impacts (e.g., site clearing, grading and construction activities) should be limited to <25% of the VP habitat. Where practicable, roads & driveways should be excluded from the VP envelope[8].	
(b) BANK STABILIZATION PROJECTS	Inland bank stabilization <100 linear FT and an average of <1 CY of fill per linear FT below ordinary high water (OHW). • In-stream work limited to Jul 15-Oct 1. • No work in VPs or within 200' of the VP's edge. • No work in SAS[7]. • No work in EFH waters (see GC 10). • No work in Rivers of Concern[11]. • No work on Corps properties and Corps-controlled easements[9]. • No work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River. • No work below OHW of the Trout River.	Inland bank stabilization ≥100 linear FT, and/or an average of ≥1 CY of fill per linear foot below OHW.	
(c) RIVER/ STREAM/ BROOK WORK & CROSSINGS *and* WATERWAY/ WETLAND CROSSINGS	• In-stream (e.g., rivers, streams, brooks, etc.) work limited to Jul 15 - Oct 1 (see GC 21). • All stream crossings conform with the performance standards in GC 21. • Bridge spans, open bottom arches or embedded culverts are required. • Culverts at waterbody crossings shall preserve hydraulic connectivity, at its present level, between any wetlands on either side of the road. <u>Work in this category excludes:</u> • Projects using retrofit methods increasing flow velocity or slip lining (only for 1 – 3 above). • Work in SAS[7]. • Open trench excavation in flowing waters except for riprap projects (See GC 21). • Structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River.	Projects sponsored by a Federal or State agency with proactive restoration[10] as a primary purpose with impacts of any area exceeding Category 1. Net impacts must not be greater than minimal.	

	• Fills below OHW of the Trout River		
(d) REPAIR, REPLACEMENT IN KIND & MAINTENANCE OF AUTHORIZED FILLS	Repair/maintenance/replacement in kind of existing, currently serviceable, authorized fills with no expansion or change in use. • Conditions of the original authorization apply. • Minor deviations in fill design allowed[12], except for stream crossings or dams. • No fills in special wetlands[8]. • No fills in SAS[7] & EFH waters (see GC 10). • No structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River. • No fills below OHW of the Trout River.	Repair/maintenance/replacement in kind of existing, currently serviceable, authorized fills with expansion or a change in use <1 acre. Replacement of non-serviceable authorized fills, including expansion or a change in use, totaling <1 acre.	Repair/maintenance of existing, currently serviceable, authorized fills with expansion or a change in use >1 acre. Replacement of non-serviceable authorized fills, including expansion or a change in use, totaling ≥ 1 acre.
(e) MISC.	Activities required for the containment and cleanup of oil and hazardous substances. Fish and wildlife harvesting such as duck blinds. Temporary scientific measurement devices and survey activities, e.g., exploratory drilling, surveying, and sampling. Monitoring wells. Recreational gold mining. Does not include oil/gas exploration and fills for roads or construction mats.	Zebra Mussel Control Projects. Fishery habitat enhancement structures. Utility line crossings, water intakes and outfalls, and sea lamprey control projects.	Project where an EIS is required by the Corps.
(f) MISC. (applies only to NAVIGABLE WATERS OF THE U.S.[2] excluding Lake Champlain, Lake Memphremagog, Wallace Pond)	Repair, replacement in kind or maintenance of existing, currently serviceable, authorized structures. <u>Provided:</u> • No expansion or change in use. • Must be rebuilt in same footprint, however minor deviations[12] in structure design allowed. • No structures, fill or work below OHW in the National Wild and Scenic River designated study segments of the Missisquoi River.	New and maintenance dredging[13] up to 5,000 CY with upland disposal or beach nourishment. No impacts to SAS[7]. Aerial transmission lines. Floating or post supported docks or decks. Private, non-commercial, single-boat moorings. Utility lines installed by directional bores.	Maintenance dredging[13] of any amount affecting a SAS[7]. New and maintenance dredging greater than 5,000 CY or in or affecting a SAS. Dredging with open water disposal.

II. NAVIGABLE WATERS OF THE U.S.[3] – LAKE CHAMPLAIN, LAKE MEMPHREMAGOG, WALLACE POND and ADJACENT WETLANDS	**Navigable Waters of the U.S.[3]:** These waters were designated as navigable by Congress (33 CFR 329).		
	Projects not meeting Category 1 must apply/report to the Corps as either a Category 2 or Individual Permit project. All Category 1 and 2 projects must comply with all of this GP's applicable terms (Pages 1 – 6) and general conditions (Pages 7 – 16).		
	CATEGORY 1	**CATEGORY 2**	**INDIVIDUAL PERMIT (IP)**
(a) FILL	No provisions for new or previously unauthorized fills in Category 1.	<5,000 SF waterway/wetland fill and secondary impacts[4] (e.g. areas drained, flooded, fragmented, mechanically cleared or excavated). Includes boat ramps & bridge fills. Projects sponsored by a Federal or State agency with proactive restoration[10] as a primary purpose and impacts of any size. Net impacts must not be greater than minimal.	≥5,000 SF waterway/wetland fill and secondary impacts[4] (e.g. areas drained, flooded, fragmented, mechanically cleared or excavated). Fill area includes all temporary and permanent waterway fills. EIS required by the Corps.
(b) REPAIR, REPLACEMENT IN KIND AND MAINTENANCE WORK	Repair, replacement in kind or maintenance of existing, currently serviceable, authorized structures and fills. Provided: • No expansion or change in use. • Must be rebuilt in same footprint, however minor deviations[12] in structure design allowed.	Repair/replacement in kind/maintenance of currently serviceable authorized fills with expansion or a change in use <5000 SF. Replacement of non-serviceable authorized fills, including expansion or a change in use, totaling <5000 SF. Construction mats of any area necessary to conduct activities that were previously authorized, authorized under Category 1, or not subject to regulation. Authorized construction mats must be in place for no more than 3 months, removed immediately upon work completion, and the wetlands must be restored (see GC 18).	Repair/maintenance/replacement in kind of currently serviceable authorized fills with expansion or a change in use >5000 SF.
(c) DREDGING	No provisions for dredging in Category 1.	New and maintenance dredging[13] up to 5,000 CY with upland disposal or beach nourishment. Provided: • No impacts to SAS[7] • Specific activities with impacts of any area or cubic yardage required to affect the containment, stabilization, or removal of hazardous or toxic waste materials that are performed, ordered, or sponsored by a government agency with established legal or regulatory authority may be reviewed as a Category 2 project. Wetlands	New or maintenance dredging[13] ≥5,000 CY. Dredging affecting an SAS[7]. All dredging with open water disposal.

		must be restored in place.	
(d) MOORINGS	Private, non-commercial, non-rental, single-boat moorings. Provided: • Chains or other connections may not rest on the bottom in SAS[7] (eco-friendly mooring technology is required). • Not associated with a boating facility[14]. • No interference with navigation. • Moorings in a Federal Navigation Project (FNP)[15] not associated with a boating facility. • Not located within the buffer zone of the horizontal limits of a FNP.	Moorings that do not meet the terms of Category 1. Moorings located such that they, and/or vessels docked or moored at them, are within the buffer zone of the horizontal limits of a FNP[15].	Moorings and/or their moored vessels within the horizontal limits of a FNP[15].
(e) PILE-SUPPORTED STRUCTURES AND FLOATS	• Reconfiguration of existing authorized docks with no additional slips and no expansion. Seasonal private, residential pile-supported structures for navigational access extending no further waterward than 50 FT MHW, not >4 FT wide, & a dock deck area <500 SF. • Private, bottom-anchored floats and seasonal swim floats ≤400 SF. • Private boat & float lifts to authorized residential docks. Provided for 1 - 4 above: • No structure extends across >25% of the waterway width at MLW. • Not located over SAS[7]. • Not located within the buffer zone of the horizontal limits of an FNP[15].	Private structures and floats for navigational access to the waterway that do not meet the terms of Category 1. Piers, docks, decks, floats, and similar structures that provide public recreational uses such as fishing, swimming, access, etc. Non-fill structures to provide recreational access to the waterbody (e.g. stairways, etc.). Minor modifications to existing, permitted boating facilities. Structures or floats and/or vessels docked or moored at them within the buffer zone of the horizontal limits of a FNP[15].	Structures or floats and/or vessels docked or moored at them within the horizontal limits of a FNP[15]. Structures or floats associated with a new or previously unauthorized boating facility.[14]
(f) BANK STABILIZATION PROJECTS		Bank stabilization <500 linear feet and an average of 1 CY per linear ft. of fill below OHW or less provided no wetland fill.	Bank stabilization ≥500 linear ft. and/or involving more than an average of 1 CY per linear FT of fill below OHW.
(g) MISCELLANEOUS	Temporary buoys, markers, floats, etc. for recreational use during specific events, provided they are in place for no more than 30 days and are removed within 15 days after use is discontinued. The placement of aids to navigation and regulatory markers which are approved by and installed in accordance with the requirements of the U.S. Coast Guard. (See 33 CFR 66, Chapter I, subchapter C).	Structures/work in or affecting navigable waters and/or adjacent wetlands that are not defined under any previous headings. Includes but is not limited to utility lines, aerial transmission lines, pipelines, outfalls, intakes, and horizontal directional drilling. Zebra Mussel control projects. Fishery habitat enhancement structures.	Projects where an EIS is required by the Corps. Activities or activities with docked or moored vessels extending within the horizontal limits of a Corps FNP[15] (does not include utility lines, aerial lines and subsurface crossings in Cat

	Activities required for the containment and cleanup of oil and hazardous substances that are subject to the National Oil and Hazardous Substances Pollution Contingency Plan (40 CFR 300) provided that the work is done in accordance with the Spill Control and Countermeasure Plan required by 40 CFR 112.3 and any existing state contingency plan and provided that the Regional Response Team (if one exists in the area) concurs with the proposed containment and cleanup action. SAS[7] must typically be restored in place at the same elevation. Scientific measurement devices & survey activities such as exploratory drilling, surveying and sampling, provided that such structures do not restrict movement of aquatic organisms. Does not include oil and gas exploration or seismic testing, or fills for roads or construction mats. Fish and wildlife harvesting devices and activities such as pound nets, duck blinds, and small fish attraction devices such as open-water fish concentrators (sea kites, etc.). Provided: no hazard to navigation and activity is not in wetlands (except Sea Lamprey control projects). Debris removal.	Sea Lamprey control projects. Nuisance aquatic plant control projects. Utility lines installed by directional bore.	2).

End Notes/Definitions

[1] **Waters of the United States (U.S.):**

a. All waters which are currently used, or were used in the past, or may be susceptible to use in interstate or foreign commerce, including all waters which are subject to the ebb and flow of the tide;

b. All interstate waters including interstate wetlands;

c. All other waters such as intrastate lakes, rivers, streams (including intermittent streams), mudflats, sandflats, wetlands, sloughs, prairie potholes, wet meadows, playa lakes, or natural ponds, the use, degradation or destruction of which could affect interstate or foreign commerce including any such waters:

i. Which are or could be used by interstate or foreign travelers for recreational or other purposes; or

ii. From which fish or shellfish are or could be taken and sold in interstate or foreign commerce; or

iii. Which are used or could be used for industrial purpose by industries in interstate commerce;

d. All impoundments of waters otherwise defined as waters of the U.S. under the definition;

e. Tributaries of waters identified in paragraphs (a)-(d) above;

f. The territorial seas;

g. Wetlands adjacent to waters (other than waters that are themselves wetlands) identified in (a)-(f) above. Waste treatment systems, including treatment ponds or lagoons designed to meet the requirements of CWA (other than cooling ponds as defined in 40 CFR 123.11(m) which also meet this definition's criteria) are not waters of the U.S.

h. Waters of the U.S. do not include prior converted cropland. Notwithstanding the determination of an area's status as prior converted cropland by any other federal agency, for the purposes of the CWA, the final authority regarding CWA jurisdiction remains with the EPA.

[2] **Inland Waters and Wetlands:** These are a subset of waters of the U.S., are regulated under Section 404 of the CWA, and include rivers, streams, lakes, ponds and wetlands, excluding Section 10 Navigable Waters of the U.S. The jurisdictional limits [33 CFR 328.4)(c)] are the ordinary high water (OHW) mark in the absence of adjacent wetlands, beyond the OHW mark to the limit of adjacent wetlands when adjacent wetlands are present, and the wetland limit when only wetlands are present.

[3] **Navigable Waters of the U.S.:** These are a subset of waters of the U.S., and are defined at 33 CFR 329. The jurisdictional limits [33 CFR 329.11] extend laterally to the entire water surface and bed of a navigable waterbody, which includes all the land and waters below the ordinary high water mark. Jurisdiction thus extends to the edge (as determined above) of all such waterbodies, even though portions of the waterbody may be extremely shallow, or obstructed by shoals, vegetation or other barriers. Marshlands and similar areas are thus considered navigable in law, but only so far as the area is subject to inundation by the ordinary high waters. In Vermont these waters are: the Connecticut River, Lake Champlain, Lake Memphremagog, Wallace Pond, Ompompanoosuc River (to mile 3.8), Waits River (to mile 0.9), the Black River (mouth to mile 25 in Craftsbury), the Battenkill River (to mile 50 in Manchester), the Lamoille River (mouth to mile 79 in Greensboro), the Missisquoi River (including the North Branch, from the mouth to mile 88.5 in Lowell), Otter Creek (mouth to mile 63.8 in Procter), Winooski River (mouth to Marshfield), Moose River (from Passumpsic River to the Victory Town Line), Nulhegan River (mouth to its source including the East Branch, the Black Branch and the Yellow Branch), Paul Stream (mouth to the source), East Branch of the Passumpsic River (from the confluence with the Passumpsic River to East Haven), Passumpsic River (mouth to confluence with the East Branch), White River (mouth to its source), Wells River (mouth to Groton Pond).

[4] **Direct, Secondary (Indirect), and Cumulative Impacts:**

Direct Impacts: The immediate loss of aquatic ecosystem within the footprint of the fill.

Secondary (Indirect) Impacts: These are effects on an aquatic ecosystem that are associated with a discharge of dredged or fill materials, but do not result from the actual placement of the dredged or fill material. (40 CFR 230.11 (h)). Secondary impacts are those impacts outside the footprint of the fill (e.g., beyond the bounds of the disposal site) that arise from and are associated with the direct discharge of dredged or fill material. Some examples are: I) Habitat Fragmentation. This occurs when a relatively undisturbed habitat block is interrupted or broken apart by roads, ditches, disturbance of vegetation, or development of structures. II) Interruption of Travel Corridors. Travel corridors are routes that many species travel on to find food, mates, shelter, and cover. Many aquatic species follow stream channels and wetlands, and follow established routes season after season. III) Vernal Pools. These are critically important breeding habitats for amphibians. Many amphibians disperse several hundred feet from their breeding ponds into the adjacent upland habitat after the breeding season has ended. IV) Hydrology, hydrological functions and non-point source impacts: A) Interference with the migration or movement of fish and shellfish from one area to another, such as placement of a dam eliminating access to spawning grounds for anadromous fish. B) Greater amounts of sediment, nutrients, and other pollutants such as lead, oil, gas, and salt that could impact wetlands and streams. Sediment causes turbidity, which reduces aquatic life and usually transports pesticides, heavy metals and other toxins into streams. This is especially a concern in watersheds where the streams are already listed as impaired by the VT ANR. C) Submerged aquatic vegetation is very dependent on light transmission and small changes in ambient turbidity can preclude it from growing in certain areas. D) Trout spawning areas are selected in areas that are well flushed and aerated, and new amounts of deposition may result in a spawning area being eliminated due to siltation of fish eggs. E) Physical effects such as erosion, accretion, entrenchment, sedimentation, embedment, channel or shoreline migration and failure to pass bedload material, organic matter and large woody debris.

Cumulative Impacts: The extent of past, present, and foreseeable developments in the area may be an important consideration in evaluating the significance of a particular project's impacts. Although the impacts associated with a particular discharge may be minor, the cumulative effect of numerous similar discharges can result in a large impact. Cumulative impacts should be estimated only to the extent that they are reasonable and practical.

[5] **Incidental Fallback:** The term "discharge of dredged or fill material" also includes certain discharges resulting from excavation.

[6] **Water Diversions:** Water diversions are activities such as bypass pumping or water withdrawals. Temporary flume pipes, culverts or cofferdams where normal flows are maintained within the stream boundary's confines aren't water diversions. "Normal flows" are defined as no change in flow from pre-project conditions. See GC 21.

[7] **Special Aquatic Sites:** Include inland wetlands, mudflats, vegetated shallows (permanently inundated areas that support rooted aquatic vegetation), and riffle and pool complexes. (40 CFR 230)

[8] **Special Wetlands:** Jurisdictional vernal pools, bogs, fens, and wetlands which provide habitat for threatened or endangered species or species as designated by the State of VT Natural Heritage Program. See GC 27 for website. The following definitions for bogs, fens and vernal pools apply for the purposes of this GP:

Bog - A peat accumulating wetland with hydric, organic soils, a complete, or nearly complete, Sphagnum cover and a pH value ranging from 3.5 to 5.6 that receives water primarily from precipitation. Typical species include Sphagnum, leatherleaf and pitcher plant.

Fen - A peat accumulating wetland with hydric organic soils and a pH value ranging from 4.0 to 8.0. Sphagnum moss may be present, however, not as a complete cover. It generally receives water and minerals from runoff flowing through it. Typical species include low sedges, Sphagnum, other mosses and heath shrubs.

Vernal Pools and Habitat: A vernal pool, also referred to as a seasonal forest pool, is a temporary to semi-permanent body of water occurring in a shallow depression that typically fills during the spring or fall and may dry during the summer. Vernal pools have no permanent inlet or outlet and no viable populations of predatory fish. A vernal pool may provide the primary breeding habitat for wood frogs (*Rana sylvatica*), spotted salamanders (*Ambystoma maculatum*), blue-spotted salamanders (*Ambystoma laterale*), Jefferson salamander (*Ambystoma jeffersonianum*), and fairy shrimp (*Eubranchipus* sp.), as well as valuable habitat for other plants and wildlife, including several rare, threatened, and endangered species. A vernal pool intentionally created for the purposes of compensatory mitigation is included in this definition. For the purposes of this GP, the presence of any of the following species in any life stage in any abundance level/quantity would designate the waterbody as a vernal pool: fairy shrimp, blue spotted salamanders, spotted salamanders or wood frogs. The Corps may determine during a Category 2 review that a waterbody should not be regulated as a VP based on available evidence. For the purposes of this GP, the VP Management Areas are the: Vernal Pool Depression (includes the vernal pool depression up to the spring or fall high water mark, and includes any vegetation growing within the depression), Vernal Pool Envelope (area within 100 FT of the VP Depression's edge) and Critical Terrestrial Habitat (area within 100-750 FT of the Vernal Pool Depression's edge). [*Note: Critical Terrestrial Habitat is defined as 100-750 FT on page 243 of the document "Science and Conservation of Vernal Pools in Northeastern North America," Calhoun and deMaynadier, 2008, which is referenced in Appendix E, page 3, Paragraph 10(b).

[9] **Corps Properties & Easements:** Contact the Corps, Real Estate Division (978) 318-8580 to initiate reviews about both Corps holdings and permit requirements.

[10] **Proactive Restoration:** The manipulation of the physical, chemical, or biological characteristics of a site with the goal of returning natural/historic functions to a former wetland or other aquatic resource (called re-establishment) or a degraded wetland or other aquatic resource (called rehabilitation). Restoration means the result of actions which, in the opinion of the Federal and state resource agencies, reinstates, or will reinstate, insofar as possible, the functions and values of a wetland or aquatic resource which has been altered. Restoration is the re-creation or rehabilitation of wetland or other aquatic resource ecosystems whose natural functions have been destroyed or impaired. The Corps will decide if a project qualifies as proactive restoration and must determine along with Federal & state agencies that the net effects would be no more than minimal.

[11] **Rivers of Concern:** The following are rivers of concern due to either endangered species or cumulative impacts. There are no non-reporting bank stabilization activities in these rivers: Batten Kill River (to the headwaters), Black River (from its mouth in Springfield to its headwaters), Connecticut River, Lamoille River (from Hardwick to the confluence with Lake Champlain), Lewis Creek (from the Rte 116 crossing to the confluence with Lake Champlain), Missisquoi River (from the International Boundary in Richford, VT to the confluence with Lake Champlain), Ompompanoosuc River (to the headwaters), Otter Creek (from Rutland to the confluence with Lake Champlain), North Branch of Ball Mountain Brook (from Pikes Falls to the headwaters), Poultney River (to the headwaters), West River (from Jamaica to the confluence with the Connecticut River), White River (to the headwaters), Winooski River (from Montpelier to Lake Champlain).

[12] **Minor deviations.** Changes to the structure's configuration or filled area, including those due to changes in materials, construction techniques, or current construction codes or safety standards, which are necessary to make repair, rehabilitation, or replacement are permitted, provided the adverse environmental effects resulting from such repair, rehabilitation, or replacement are minimal. Currently serviceable means useable as is or with some maintenance, but not so degraded as to essentially require reconstruction.

[13] **Maintenance Dredging.** Includes areas and depths previously authorized by the Corps and dredged. **New Dredging:** Includes dredging proposed in previously un-dredged areas and/or in areas exceeding previously authorized dimensions (deeper or wider than previously authorized) excluding normal overdredge.

[14] **Boating Facilities:** Facilities that provide, rent or sell mooring space, e.g., marinas, yacht clubs, boat yards, dockominiums.

[15] **Federal Navigation Projects (FNPs):** FNPs are comprised of Federal channels and Federal anchorages. Contact the Corps for their location and information. **Horizontal Limits:** The outer edge of an FNP. **Buffer zone:** Equal to three times the authorized depth of that channel.

[16] Construction Mats: Construction, swamp and timber mats (herein referred to as "construction mats") are generic terms used to describe structures that distribute equipment weight to prevent wetland damage while facilitating passage and providing work platforms for workers and equipment. They are comprised of sheets or mats made from a variety of materials in various sizes. A timber mat consists of large timbers bolted or cabled together. Corduroy roads, which are not considered to be construction mats, are cut trees and/or saplings with the crowns and branches removed, and the trunks lined up next to one another. Corduroy roads are typically installed as permanent structures. Like construction mats, they are considered as fill whether they are installed temporarily or permanently.

[17] **Headwater and Ephemeral Streams:** Forested upland and wetland clearing can lead to additional direct and indirect impacts to the headwater streams and ephemeral streams on individual sites. Headwater streams and wetlands provide a rich resource base that contributes to the productivity of both local food webs and those farther downstream. Land use changes in the vicinity of small streams and wetlands can impair the natural functions of headwater systems. These systems are vitally important to maintaining the quality and quantity of water and aquatic health of streams lower in the watershed.

[18] **Maintenance:** a) In accordance with 33 CFR 323.4(a)(2), any discharge of dredged or fill material that may result from any of the following activities is not prohibited by or otherwise subject to regulation under Section 404 of the CWA: "Maintenance, including emergency reconstruction of recently damaged parts, of currently serviceable structures such as dikes, dams, levees, groins, riprap, breakwaters, causeways, bridge abutments or approaches, and transportation structures. Maintenance does not include any modification that changes the character, scope, or size of the original fill design." Otherwise, the following work is regulated and subject to the Category 1 or 2 thresholds in Appendix A above: The repair, rehabilitation, or replacement of any previously authorized, currently serviceable structure or fill, or of any currently serviceable structure or fill authorized by 33 CFR 330.3 – "Activities occurring before certain dates," provided that the structure or fill is not to be put to uses differing from those uses specified or contemplated for it in the original permit or the most recently authorized modification. b) Minor deviations in the structure's configuration or filled area, including those due to changes in materials, construction techniques, or current construction codes or safety standards that are necessary to make repair, rehabilitation, or replacement are authorized. c) Currently serviceable means useable as is or with some maintenance, but not so degraded as to essentially require reconstruction. d) No seaward expansion for bulkheads or any other fill activity is considered Category 1 maintenance. e) Only structures or fills that were previously authorized and are in compliance with the terms and condition of the original authorization can be maintained as a non-regulated activity under 33 CFR 323.4(a)(2), or in accordance with the Category 1 or 2 thresholds in Appendix A. f) The state's maintenance provisions may differ from the Corps and may require reporting and written authorization from the state. g) Contact the Corps to determine whether stream crossing replacements require a written application to the Corps for at least a Category 2 review.

[19] **Wild and Scenic River Designated Study Rivers:** The Missisquoi River, from its' headwaters in Lowell to the Canadian border in Troy (25 miles) and from the Canadian border in East Richford to Enosburg Falls (25 miles) and the Trout River have been officially designated by Congress as a study river.

[20] **Best Management Practices for Utility Construction Mats:**

Installation
• Mats should be in good condition to ensure proper installation, use and removal. • Where feasible, mats should be carried and not dragged unless they are being used as a grading implement. • Where feasible, place mats in a location that would minimize the amount needed for the wetlands crossing. • Minimize impacts to wetland areas during installation, use, and removal. • Install adequate erosion & sediment controls at approaches to mats to promote a smooth transition to, and minimize sediment tracking onto, swamp mats. • In most cases, construction mats should be placed along the travel area so that the individual boards are resting perpendicular to the direction of traffic. No gaps should exist between mats. Place mats far enough on either side of the resource area to rest on firm ground. • Provide standard construction mat BMP details to work crews.
Wetland/Stream Channel Crossing
• At "dry" crossings where no flow is present or anticipated during project construction, the mats may be placed directly onto the ground in order to prevent excessive rutting, provided stream banks & bottoms are not adversely altered. • Construction mats may be used as a temporary bridge over a stream to allow vehicles access to the work site. Small sections of mat are placed within and along the stream parallel to the flow of water. Mats may then be placed perpendicular to the stream, resting on top of the initial construction mat supports. It may be necessary to place additional reinforcement for extra stability & to minimize the amount of sediment that could fall between the spaces of each timber. • Mats should not be placed so that they restrict the natural flow of the stream. • Minimize number of stream/wetland crossings. Where feasible, locate crossing site where stream channel is narrow for the shortest possible clear span & where stream banks are stable & well defined. For large wetland complexes, consider accessing structures from opposite sides where possible to avoid crossing the entire wetland. • More than one layer of mats may be necessary in areas which are inundated or have deep organic wetland soils.
Maintenance
• Matted wetland crossings should be monitored to assure correct functioning of the mats. Inspect mats after use. Look for any defects or structural problems. Mats which become covered with soils or construction debris should be cleaned and the materials removed & disposed of in an upland location. The material should not be scraped & shoveled into the resource area. Mats which become imbedded must be reset or layered to prevent mud from covering them or water passing over them.

Removal

- Matting should be removed by "backing" out of the site, removing mats one at a time. Any rutting or significant indentations identified during mat removal should be regraded immediately, taking care not to compact soils.
- Mats should be cleaned before transport to another wetland location to remove soil & any invasive plant species, seed stock or plant material.
- Cleaning methods may include but are not limited to shaking or dropping mats in a controlled manner with a piece of machinery to knock off attached soil & debris, spraying with water or air, & sweeping.
- Crossings should be inspected following mat removal to determine the level of restoration required.

Restoration

- Special precautions should be taken to promptly stabilize areas of disturbed soil located near wetlands & streams. Matted areas within wetlands will be allowed to naturally revegetate from existing root & seed stock of native plant species. If conditions warrant, wetland seed mix may be broadcasted over the matted area to supplement the existing seed & rootstock. The use of mulch in wetlands shall consist of weed-free mulch to mitigate the risk of the spread of invasive plant species.

CERTIFICATION FOR FEDERAL-AID CONTRACTS

The prospective bidder, by signing and submitting this bid proposal, certifies, to the best of his or her knowledge and belief, that:

(1) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person or influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

(2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any Federal agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered to. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, U.S. Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for each such failure.

The prospective participant also agrees by submitting his or her bid or proposal that he or she shall require that the language of this certification be included in all lower tier subcontracts, which exceed $100,000 and that all such sub-recipients shall certify and disclose accordingly.

State of Vermont
Agency of Transportation
CONTRACTORS EEO CERTIFICATION FORM

Certification with regard to the Performance of Previous Contracts of Subcontractors subject to the Equal Employment Opportunity Clause and the filing of Required Reports.

The bidder, hereby certifies that he/she has participated in a previous contract or subcontract subject to the equal opportunity clause as required by Executive Orders 10925, 11114, or 11246 as amended, and that he/she has, filed with the Joint Reporting Committee, the Director of the Office of Federal Contract Compliance, a Federal Government contracting or administering agency, or the Presidents committee on Equal Employment Opportunity, all reports due under the applicable filing requirements.

JA McDonald, Inc.	Eric Boyden	President
Company	By	Title

NOTE: The above certification is required by the Equal Employment Opportunity regulations of the Secretary of Labor(41 CFR 60-1.7(b)(1)), and must be submitted by bidders and proposed subcontractors only in connection with contracts and subcontracts which are subject to the equal opportunity clause. Contracts and subcontracts which are exempt from the equal opportunity clause are set forth in 41 CFR 60-1.5 (Generally only contracts or subcontracts of $10,000 or under are exempt.) Currently, Standard Form 100(EEO-1) is the only report required by the Executive Orders or their implementing regulations.

Proposed prime contractors and subcontractors who have participated in a previous contract or subcontract subject to the Executive Orders and have not filed the required reports should note that 41 CFR 60-1.7(b)(1) prevents the award of contracts and subcontracts unless such contractor submits a report covering the delinquent period or such other period specified by the Federal Highway Administration, or by the Director, Office of Federal Contract Compliance, U.S. Department of Labor.

CA-111-B
(01/06/15 revision)

CONSTRUCTION CONTRACT

1. Parties. This is a construction contract made this 23rd day of February, 2015 between the State of Vermont, by its Agency of Transportation (hereafter called "State" or "Agency"), and J.A. McDonald, Incorporated of 585 Gilman Road, PO Box 132, Lyndon Center, VT 05850, a corporation, incorporated under the laws of the State of Vermont, its successors and assigns, (hereafter called Contractor).

2. Subject Matter. The Contractor, in consideration of the payment or payments specified in this Contract and agreed to by State, hereby agrees to furnish all the materials and to perform all the work and labor in the improvement of a certain project in the Town of Lincoln, County of Addison, State of Vermont, being approximately 600 Feet in length, at the unit prices bid by Contractor for the respective estimated quantities, aggregating approximately the sum of Two Million Three Hundred Sixty Five Thousand Eight Hundred Fifty Four Dollars and Ten Cents ($2,365,854.10), and such other items, as are mentioned in the original Proposal. The original Proposal and prices named, together with the Standard Specifications for Construction ("Specifications") as are listed in the Schedule of Prices, are made a part of this Contract. Also, the drawings of the roadway prepared by the Agency, as verified by the Agency are made a part this Contract. The project is situated as follows:

Lincoln BRF 0188 (8): BEGINNING AT A POINT ON TH 1 (EAST RIVER ROAD) APPROXIMATELY 0.5 MILES SOUTH OF ITS JUNCTION WITH GOVE HILL ROAD AND PROCEEDING SOUTHERLY FOR APPROXIMATELY 0.1 MILES ALONG EAST RIVER ROAD.

The construction consists of: REPLACE EXISTING BRIDGE WITH A NEW WIDENED BRIDGE ON AN ALIGNMENT SIMILAR TO EXISTING, INCLUDING RELATED CHANNEL AND APPROACH WORK.

3. Labor and Material; Specifications. The Contractor shall perform all the work and labor in the best and most workmanlike manner. The materials and labor shall be in strict and entire conformity, in every respect, with the Specifications and drawings and shall be subject to the inspection and approval of the Agency. If any of the material or labor shall be rejected by the Agency as defective or unsuitable, then the Contractor shall remove and replace the defective or unsuitable materials with other approved materials and do the labor anew, to the satisfaction and approval of the Agency, at the cost and expense of the Contractor. The Standard Specifications for Construction, approved and adopted by the Agency in 2011 are incorporated herein, and made a part of this Contract.

4. Time for Performance; Liquidated Damages. The Contractor shall furnish the materials and perform the labor in every respect to the satisfaction and approval of the Agency, on or before October 2, 2015 after written notice has been given by the Engineer to begin work. In case of the failure on the part of the Contractor, for any reason, except as provided in this Contract, to complete the furnishing of the materials and performing the work on or before October 2, 2015 the State shall deduct from any moneys due or which may become due the Contractor, or if no moneys shall be due, the State shall have the right to recover the amount of liquidated damages as provided in the Specifications for each and every day elapsing between the time stipulated for the completion and the actual date of completion, in accordance with the terms of the Contract. Any such deductions or sums to be recovered are not penalties but liquidated damages. However, the Agency at its discretion, shall make allowance over the period specified for the completion of the work, for causes over which the Contractor has no control and which must delay the completion of the work, in such case, the Contractor shall become liable for liquidated damages for delays beginning from the date on which the extended period shall expire.

5. Extra Work or Materials; Claims. The Contractor understands and agrees that the Agency will not allow any claim for extra work or materials, not specifically provided in this Contract. The Contractor shall not do any work or furnish any materials not covered by these Specifications and Contract, unless such work is ordered in writing by the Agency. In no event shall the Contractor incur any liability by reason of any verbal directions or instructions that he may be given by the Agency. The State will not be liable for any materials furnished or used or for any work or labor done, unless the materials, work or labor are required of the Contractor on written order furnished by the Agency. Any such work or material which may be done or furnished by the Contractor without such written order first being given by the Agency shall be at the Contractor's own risk, cost and expense. The Contractor agrees that without such written order the Contractor shall make no claim for compensation for work or materials so done or furnished.

6. Assignment; Subcontracting. The Contractor shall not assign this Contract or any part of this Contract, or any right to any moneys to be paid the Contractor under this Contract, without the prior written approval of the Agency. The Contractor shall not subcontract any part of the work to be done or materials furnished under the Contract without the written approval of the Agency.

7. Acceptance of Final Payment; Release. The Contractor's acceptance of the final payment shall be considered as a release in full of all claims against the State of Vermont arising out of, or by reason of the work done and materials furnished under this Contract.

8. Bonds. The Bonds given by the Contractor, a Compliance Bond in a sum equal to one-hundred (100) per centum, and a Labor and Materials Bond in the sum equal to one-hundred (100) per centum of the total contract price of the work to be done, to secure a proper compliance with the terms and provisions of this Contract, are attached to and made a part of this Contract.

9. Dispute Resolution; Exclusivity of Administrative Remedies. All questions or disputes arising between the parties hereto respecting any matter pertaining to this Contract or any part of this Contract, or any breach of this Contract shall be referred to the Secretary of Transportation, whose decision and award shall be final, binding and conclusive upon all parties, subject to the right of appeal to the Transportation Board under 19 V.S.A. § 5(d) (4). All other rights or rights of action at law or in equity under and by virtue of this Contract and all matters connected with and relating to this Contract are hereby expressly waived.

10. Compensation for Contract Work. The Contractor agrees to receive the prices set forth in the following Schedule of Prices as full compensation for furnishing all the materials and labor which may be required in the prosecution and completion of the whole of the work to be done under this Contract and in all respects to complete this Contract to the satisfaction of the Agency.

VERMONT AGENCY OF TRANSPORTATION

CONTRACT SCHEDULE

DATE : 01/30/15
REVISED: 01/27/15

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0005	201.11 CLEARING AND GRUBBING, INCLUDING INDIVIDUAL TREES AND STUMPS	0.180 ACRE	25,000.00000		4,500.00	
0010	203.15 COMMON EXCAVATION	2,650.000 CY	13.00000		34,450.00	
0015	203.16 SOLID ROCK EXCAVATION	465.000 CY	100.00000		46,500.00	
0020	203.27 UNCLASSIFIED CHANNEL EXCAVATION	280.000 CY	32.00000		8,960.00	
0025	203.30 EARTH BORROW	13.000 CY	10.00000		130.00	
0030	203.31 SAND BORROW	860.000 CY	35.00000		30,100.00	
0035	204.22 TRENCH EXCAVATION OF EARTH, EXPLORATORY (N.A.B.I.)	10.000 CY	75.00000		750.00	
0040	204.25 STRUCTURE EXCAVATION	740.000 CY	38.00000		28,120.00	
0045	204.30 GRANULAR BACKFILL FOR STRUCTURES	400.000 CY	54.00000		21,600.00	
0047	205.20 DRILLING AND BLASTING OF SOLID ROCK SUBGRADE	300.000 SY	22.00000		6,600.00	
0050	210.10 COLD PLANING, BITUMINOUS PAVEMENT	245.000 SY	13.00000		3,185.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0055	301.35 SUBBASE OF DENSE GRADED CRUSHED STONE	1,150.000 CY	38.00000		43,700.00	
0060	404.65 EMULSIFIED ASPHALT	5.400 CWT	50.00000		270.00	
0065	406.50 PRICE ADJUSTMENT, ASPHALT CEMENT (N.A.B.I.)	1.000 LU	1.00000		1.00	
0070	501.33 CONCRETE, HIGH PERFORMANCE CLASS A	140.000 CY	580.00000		81,200.00	
0075	501.34 CONCRETE, HIGH PERFORMANCE CLASS B	22.000 CY	850.00000		18,700.00	
0080	507.11 REINFORCING STEEL, LEVEL I	18,350.000 LB	1.70000		31,195.00	
0085	507.12 REINFORCING STEEL, LEVEL II	14,390.000 LB	2.45000		35,255.50	
0090	507.16 DRILLING AND GROUTING DOWELS	184.000 LF	49.00000		9,016.00	
0095	507.19 MECHANICAL BAR CONNECTOR	141.000 EACH	10.00000		1,410.00	
0100	509.10 LONGITUDINAL DECK GROOVING	392.000 SY	17.00000		6,664.00	
0105	510.21 PRESTRESSED CONCRETE BOX BEAMS (45" X 48")	994.000 LF	740.00000		735,560.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0110	510.24 GROUTING SHEAR KEYS	870.000 LF	15.00000		13,050.00	
0115	514.10 WATER REPELLENT, SILANE	12.000 GAL	75.00000		900.00	
0120	516.10 BRIDGE EXPANSION JOINT, ASPHALTIC PLUG	80.000 LF	138.00000		11,040.00	
0125	524.11 JOINT SEALER, HOT POURED	80.000 LF	24.00000		1,920.00	
0130	525.34 BRIDGE RAILING, GALVANIZED 4 RAIL BOX BEAM	262.000 LF	175.00000		45,850.00	
0135	529.15 REMOVAL OF STRUCTURE (3,200 SF - EST.)	1.000 EACH	125,000.00000		125,000.00	
0140	531.17 BEARING DEVICE ASSEMBLY, STEEL REINFORCED ELASTOMERIC PAD	32.000 EACH	500.00000		16,000.00	
0145	540.10 PRECAST CONCRETE STRUCTURE (ABUTMENT #1)	1.000 LS	140,000.00000		140,000.00	
0150	540.10 PRECAST CONCRETE STRUCTURE (ABUTMENT #2)	1.000 LS	140,000.00000		140,000.00	
0155	540.10 PRECAST CONCRETE STRUCTURE (APPROACH SLAB #1)	1.000 LS	65,000.00000		65,000.00	
0160	540.10 PRECAST CONCRETE STRUCTURE (APPROACH SLAB #2)	1.000 LS	65,000.00000		65,000.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0165	601.0005 12" CSP .064 (2-2/3 X 1/2)	82.000 LF	50.00000		4,100.00	
0170	601.0816 18" RCP CLASS IV	40.000 LF	60.00000		2,400.00	
0175	601.0915 18" CPEP	30.000 LF	70.00000		2,100.00	
0180	604.18 PRECAST REINFORCED CONCRETE DROP INLET WITH CAST IRON GRATE	2.000 EACH	2,850.00000		5,700.00	
0185	613.11 STONE FILL, TYPE II	15.000 CY	65.00000		975.00	
0190	613.13 STONE FILL, TYPE IV	440.000 CY	55.00000		24,200.00	
0195	616.26 PRECAST REINFORCED CONCRETE CURB, TYPE B	150.000 LF	20.00000		3,000.00	
0200	619.16 STEEL MARKER POSTS	5.000 EACH	32.00000		160.00	
0205	620.26 WOVEN WIRE FENCE WITH WOOD POSTS	520.000 LF	15.00000		7,800.00	
0210	621.20 STEEL BEAM GUARDRAIL, GALVANIZED	283.000 LF	16.00000		4,528.00	
0215	621.51 MANUFACTURED TERMINAL SECTION, TANGENT	2.000 EACH	1,900.00000		3,800.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0220	621.73 GUARDRAIL APPROACH SECTION, GALVANIZED 4 RAIL BOX BEAM	4.000 EACH	6,000.00000		24,000.00	
0225	621.80 REMOVAL AND DISPOSAL OF GUARDRAIL	230.000 LF	1.00000		230.00	
0230	621.90 TEMPORARY TRAFFIC BARRIER	733.000 LF	18.00000		13,194.00	
0235	630.10 UNIFORMED TRAFFIC OFFICERS	160.000 HR	55.00000		8,800.00	
0240	630.15 FLAGGERS	480.000 HR	25.00000		12,000.00	
0245	631.10 FIELD OFFICE, ENGINEERS	1.000 LS	5,500.00000		5,500.00	
0250	631.16 TESTING EQUIPMENT, CONCRETE	1.000 LS	1,000.00000		1,000.00	
0255	631.17 TESTING EQUIPMENT, BITUMINOUS	1.000 LS	1,000.00000		1,000.00	
0260	631.26 FIELD OFFICE TELEPHONE (N.A.B.I.)	3,000.000 DL	1.00000		3,000.00	
0265	635.11 MOBILIZATION/DEMOBILIZATION	1.000 LS	160,000.00000		160,000.00	
0270	641.10 TRAFFIC CONTROL	1.000 LS	35,000.00000		35,000.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0275	641.15 PORTABLE CHANGEABLE MESSAGE SIGN	2.000 EACH	4,500.00000		9,000.00	
0280	646.20 4 INCH WHITE LINE	1,400.000 LF	0.75000		1,050.00	
0285	646.21 4 INCH YELLOW LINE	1,400.000 LF	0.75000		1,050.00	
0290	649.31 GEOTEXTILE UNDER STONE FILL	330.000 SY	3.00000		990.00	
0295	649.51 GEOTEXTILE FOR SILT FENCE	175.000 SY	10.00000		1,750.00	
0300	649.61 GEOTEXTILE FOR FILTER CURTAIN	200.000 SY	30.00000		6,000.00	
0305	651.15 SEED	4.000 LB	15.00000		60.00	
0310	651.18 FERTILIZER	126.000 LB	1.60000		201.60	
0315	651.20 AGRICULTURAL LIMESTONE	0.100 TON	450.00000		45.00	
0320	651.25 HAY MULCH	1.600 TON	1,000.00000		1,600.00	
0325	651.35 TOPSOIL	210.000 CY	45.00000		9,450.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0330	651.40 GRUBBING MATERIAL	240.000 SY	8.00000		1,920.00	
0335	652.10 EPSC PLAN	1.000 LS	2,500.00000		2,500.00	
0340	652.20 MONITORING EPSC PLAN	40.000 HR	45.00000		1,800.00	
0345	652.30 MAINTENANCE OF EPSC PLAN (N.A.B.I.)	1.000 LU	10,000.00000		10,000.00	
0350	653.20 TEMPORARY EROSION MATTING	1,040.000 SY	2.00000		2,080.00	
0355	653.21 PERMANENT EROSION MATTING	1,040.000 SY	8.00000		8,320.00	
0360	653.35 VEHICLE TRACKING PAD	55.000 CY	55.00000		3,025.00	
0365	653.40 INLET PROTECTION DEVICE, TYPE I	1.000 EACH	50.00000		50.00	
0370	653.55 PROJECT DEMARCATION FENCE	1,230.000 LF	1.00000		1,230.00	
0375	690.50 PRICE ADJUSTMENT, FUEL (N.A.B.I.)	1.000 LU	1.00000		1.00	
0380	900.608 SPECIAL PROVISION (HIGH PERFORMANCE CONCRETE, MASS POUR)	330.000 CY	350.00000		115,500.00	

CONTRACT ID: 10J066 PROJECT(S):LINCOLN BRF 0188(8)

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE DOLLARS	UNIT PRICE CTS	BID AMOUNT DOLLARS	BID AMOUNT CTS
0385	900.608 SPECIAL PROVISION (HIGH PERFORMANCE CONCRETE, RAPID SET)(FPQ)	7.000 CY	1,345.00000		9,415.00	
0390	900.645 SPECIAL PROVISION (CPM SCHEDULE)	1.000 LS	1,500.00000		1,500.00	
0395	900.650 SPECIAL PROVISION (INCENTIVE/DISINCENTIVE)(N.A.B.I)	1.000 LU	1.00000		1.00	
0400	900.650 SPECIAL PROVISION (MAT DENSITY PAY ADJUSTMENT, SMALL QUANTITY)(N.A.B.I.)	1.000 LU	1.00000		1.00	
0405	900.650 SPECIAL PROVISION (MIXTURE PAY ADJUSTMENT)(N.A.B.I.)	1.000 LU	1.00000		1.00	
0410	900.680 SPECIAL PROVISION (BITUMINOUS CONCRETE PAVEMENT, SMALL QUANTITY)	640.000 TON	130.00000		83,200.00	
	TOTAL BID				2,365,854.10	

Project Name & Number: Lincoln BRF 0188 (8)
EMPLOYER IDENTIFICATION NUMBER _____

WE THE UNDERSIGNED PARTIES AGREE TO BE BOUND BY THIS CONTRACT

By the State of Vermont:

Date: 2/23/15

Signature: Susan M Minter

Name: Susan M. Minter/Chris Cole

Agency: Transportation

By the Contractor:

Date: February 13, 2015

Signature:

Name: Eric Boyden

Title: President