



ABSOLUTE STANDARDS, INC.

ISO - 17034



Certificate of Analysis



Certified Reference Material (CRM)

Conformance: The "Certificate of Analysis" is applicable for CRM's, fulfilling the requirements in the current version of: ISO 17034.

Health & Safety: See the attached SDS & Certified Weight Report before use.

Intended Use: This Certified Reference Material (CRM) is intended primarily for use in the characterization of unknowns and the establishment of analyzer or instrument response factors by qualified personnel. Typical instrumental organic assays include: GC & LC, and inorganic assays include: ICP & AA. This product is for laboratory use only.

Characterization Values: In production, gravimetric/volumetric readings are certified to be within +/- 0.5% of the stated value & are valid between 18 °C & 30 °C. The measured characterization of uncertainty can be found on the Certified Weight Report. All product weighings are performed on an analytical balance that is calibrated to NIST Traceable standard weights & certified by the manufacturer. The volumetric glassware used is Class "A" type & conforms to ASTM E-288 unless otherwise stated. The solvents & compounds used are of the highest practical purity & typically meet or exceed ACS Reagent Grade & ACS Standards Grade specifications. The expanded uncertainty field on Certified Wt. Report represents CRM uncertainty as described in ISO 17034.

Homogeneity: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Verification: Uncertainties that are due to the analytical procedure(s) are within +/-5% unless specifically stated on the Certified Wt. Report.

Stability: Uncertainties for short-term stability are determined in accordance with ISO 17034. Long-term stability is determined in accordance with ISO 17034. The shelf life is limited by the stated expiration for each product. Expiration dates and additional technical information can be found on the Certified Weight Report and on the product label.

Uncertainty: UCRM is the expanded uncertainty which utilizes a K = 2 (coverage factor of 2), in accordance with ISO 17034 as listed above (Characterization, Homogeneity, Verification, and Stability).

Purity & Identity: Organic solutions are typically formulated from neat materials whose purity & identity have been characterized by GC-MSD & LC-PDA techniques with comparison to a NIST Traceable library of mass spectra when available. Additional characterization techniques may include but are not limited to: refractive index measurements of liquids, melting point measurements of solids, & GC-FID, ECD, PID, ELCD, LC-PDA measurements for purity. Inorganic solutions & neats are typically formulated from materials whose purity & identity have been characterized by ICPMS with comparison to a NIST SRM® when available. Additional characterization techniques may include but are not limited to: titrimetry, and densitometry.

Storage: Sealed ampules and other containers should be stored in the dark and at temperatures indicated on the Certified Weight Report or product label. Certification by Absolute Standards, Inc. is typically valid for 3 years from the date of manufacture. Each product will show its own expiration date as the limit of certification. Certified values are not applicable to opened ampules or for any materials stored in re-sealable containers. Please see the "Certified Weight Report" for specific values and any exceptions.



Usage: Ampules & bottles should be brought to room temperature (18 to 30 °C) before opening. Sonication may be required for high concentration solutions or solutions that may precipitate during storage. After opening, care should be exercised to avoid concentration changes owing to evaporation of the solvent or essential components. We recommend that a suitable re-sealable container be available before opening an ampule to decant the standard for short-term storage and use.

Minimum Sample Size: 0.5 uL for analytical applications.

Legal Notice: Warranty of products are as described when shipped. No warranty as to fitness for any particular application is expressed or implied. Errant shipments and/or quality claims must be made within 10 days of receipt. Liability is limited solely to the replacement of the product or refund of purchase price.

Certifying Officer: Stephen J. Arpie, M.S., Director General

Page 1 of 2



ABSOLUTE STANDARDS, INC.

ISO - 17034

Understanding the Certified Weight Report

Each Certified Reference Material (CRM) is supported by a Certified Weight Report. Assigned values for concentrations and associated uncertainties are based upon NIST traceable masses & volumes used in production.

Part #
Lot #
Shelf Life

Target Compounds

Method of Analysis

Qualitative Quantitative

Absolute Standards, Inc.
800-368-1131
www.absolutestandards.com

Certified Reference Material CRM

ISO 17034 Accredited
Scopes: http://AbsoluteStandards.com

CERTIFIED WEIGHT REPORT

Part Number: 10009R	Solvent(s): Methylene chloride	Lot# 76782	
Lot Number: 070716			
Description: CLP Priority Pollutant Internal Standards GC/MS Calibration - 6 components			
Expiration Date: 070721			
Recommended Storage: Ambient (20 °C)			
Nominal Concentration (µg/mL): 4000			
NIST Test ID#: 822-276872-11	5E-05 Balance Uncertainty	0.058 Flask Uncertainty	

Weight(s) shown below were combined and diluted to (mL): 500.0

Compound	RW#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty Purity	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL) (+/-) (µg/mL)	Expanded Uncertainty (µg/mL)	MSDS Information (Solvent Safety Info. On Attached pg.)
										CAS# OSHA PEL (TWA) LD50
1. 1,4-Dichlorobenzene-d4	118	PR-1848887287CD1	4000	98	0.2	2.04093	2.04335	4004.7	10.4	3855-82-1 N/A or:rat 500mg/kg
2. Naphthalene-d8	223	PR-23320031812NP1	4000	99	0.2	2.02032	2.02084	4001.0	10.2	1148-65-2 10 ppm (50mg/m3)(l) or:rat 490mg/kg
3. Acenaphthene-d10	2	PR-25444	4000	99	0.2	2.02032	2.02245	4004.2	16.2	15067-26-2 N/A ip:rat 600mg/kg
4. Phenanthrene-d10	249	PR-2305591711PH1	4000	98	0.2	2.04093	2.04136	4000.8	16.4	1517-22-2 N/A
5. Chrysene-d12	92	1-19260	4000	98	0.2	2.04093	2.04159	4001.3	16.4	1719-03-5 N/A
6. Perylene-d12	247	PR-24119	4000	98	0.2	2.04093	2.04156	4001.2	16.4	1520-96-3 N/A

Formulator
Reviewer

Formulated By: Paul Barron 070716 DATE

Reviewed By: Pedro L. Rentas 070716 DATE

Actual Concentration
Uncertainty Values
Health & Safety

Run 35, "P10009R L070716 [4000µg/mL in MeCl2]"

Run Length: 40.00 min, 23998 points at 10 points/second.
Created Sat, Jul 9, 2016 at 1:54:53 PM.
Sampled Sequence: 070818-GC9M2, Method: GC9-M2.
Analyzed using Method: GC9-M2.

Comments
GC9-M2 Analysis by Melissa Stanciar
Column ID SPB-5 30 meter x 0.53mm x 1.5um Film Thickness.
Flow rates: Total Flow = 300 mL/min, Helium (carrier) = 6.5 mL, Helium (make-up) = 25 mL.
Hydrogen (detector) = 30 mL, Air (detector) = 360 mL, Oven Temp 1 = 50°C (1 min).
Rate = 10°C/min, Oven Temp 2 = 300°C (14 min), Total Run Time = 40 Minutes, Injector Temp = 250°C.
FID Temp = 300°C, FID Signal = eDAQ Channel 1.
Gas Chromatograph = HP 5890, Auto Sampler = HP 7673, Standard Injection = 0.5 µL, Range = 4

Peak No.	Name	FID RT (min.)
1	1,4-Dichlorobenzene-d4	6.34
2	Naphthalene-d8	8.98
3	Acenaphthene-d10	12.97
4	Phenanthrene-d10	16.37
5	Chrysene-d12	22.62
6	Perylene-d12	25.75

3rd Party Comparison

Analyte	Sup/Abs Dev (%) (Sup/Abs) X 100-100
1,4-Dichlorobenzene-d4	2.55
Naphthalene-d8	2.43
Acenaphthene-d10	2.74
Phenanthrene-d10	0.05
Chrysene-d12	1.92
Perylene-d12	-1.73
Total	-0.56

Absolute Standards, Inc. and Supelco, Inc. have tested and reciprocally reviewed the analytical data for these products. They are approved for sale as third party reviewed standards. Absolute Standards, Inc. and Millipore Sigma, Inc. have met established specifications under the terms of agreement for Reciprocal Data Review (RDR™).

Absolute Standards, Inc. P#10009R L#070716
Supelco, Inc. P#47906 L#A55669


Part # 10009R Lot # 041219

1 of 2


Printed: 5/8/2019, 12:55:50 PM

For More Information, Contact:

StephenArpie@AbsoluteStandards.com



Certified Reference Material CRM



CERTIFIED WEIGHT REPORT

Part Number: 57526
Lot Number: 020224
Description: Ethanol BAC Standard
[80 mg/dL]
Expiration Date: 020227
Recommended Storage: Refrigerate (4 °C)
Nominal Concentration (µg/mL): 800
NIST Test ID#: 6UTB

Solvent(s): Water
Lot# 120123

Weight(s) shown below were combined and diluted to (mL):

100.0 5E-05 Balance Uncertainty


0.021 Flask Uncertainty

Formulated By:	Prashant Chauhan	020224	DATE
Reviewed By:	Pedro L. Rentas	020224	DATE

Compound	RM#	Lot Number	Nominal Conc (µg/mL)	Purity (%)	Uncertainty	Target Weight(g)	Actual Weight(g)	Actual Conc (µg/mL)	Expanded Uncertainty (+/-) (µg/mL)	SDS Information	
										(Solvent Safety Info. On Attached pg.)	LD50
1. Ethanol	174	SHBM2287	800	99.99	0.2	0.08003	0.08012	800.9	3.4	64-17-5	1000 ppm (1900mg/m3/8H) or-rat 7060mg/kg

Method: GC6MSD-1 **Detector:** Mass Selective Detector **Column:** Vocol (60m X 0.25mm ID X 1.5µm film thickness). **Oven Profile:** Temp. 1 = 35°C (Time 1 = 10min.), Temp. 2=200°C (Time 2 = 8.75 min.), Rate = 4°C/min., Injector Temp. = 200°C, Detector Temp. = 220°C. **Analyst:** Pedro Rentas.

TIC: [BSB1]P70174.D

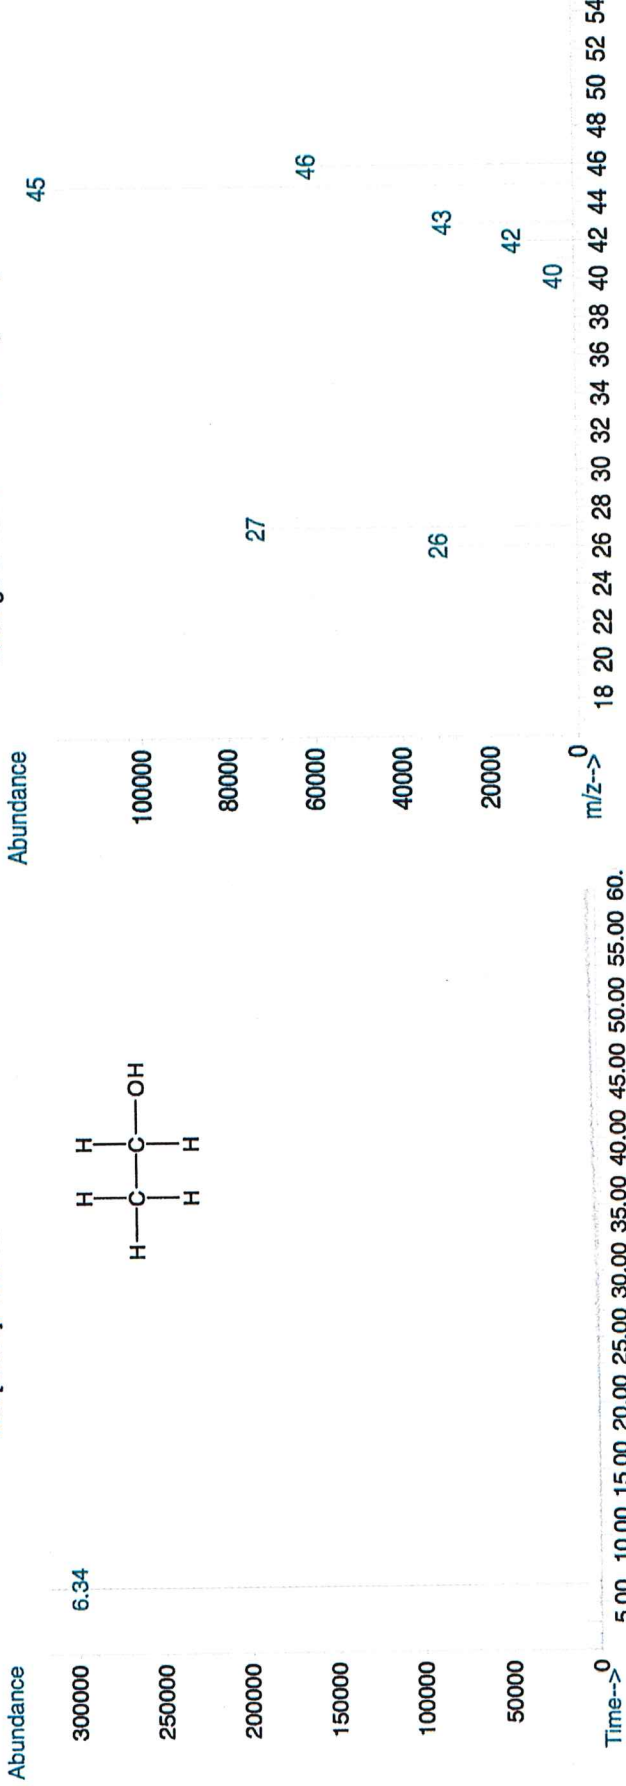

• The certified value is the concentration calculated from gravimetric and volumetric measurements unless otherwise stated.
• Standards are prepared gravimetrically using balances that are calibrated with weights traceable to NIST (see above).
• Standards are certified (+/-) 0.5% of the stated value, unless otherwise stated.
• All Standards, after opening ampule, should be stored with caps tight and under appropriate laboratory conditions.
• Uncertainty Reference: Taylor, B.N. and Kuyat, C.E., "Guidelines for Evaluating and Expressing the Uncertainty of NIST Measurement Result," NIST Technical Note 1297, U.S. Government Printing Office, Washington, DC, (1994).

Safety Data Sheet (SDS) GHS/OSHA Compliant

Section I Product and Company Identification

IDENTITY ANALYTICAL STANDARD DISSOLVED IN WATER

Manufacturer's Name	ABSOLUTE STANDARDS INC	Emergency Telephone USA & CANADA	1-800-535-5053
Address	44 Rossotto Dr. Hamden CT, 06514	Emergency Telephone International	1-352-323-3500
		Date Prepared/Revised	May 1, 2023

Section II - Hazards Identification

GHS Classification in accordance with 29 CFR 1910 (OSHA HCS)

P271	Use in ventilated area	H315	Causes skin and eye irritation.
P302,332	If on skin, wash with soap and water	P280	Use gloves, eye protection/face shield
		P305,351,338	If in eyes, remove contacts, rinse with water



Signal Word: **DANGER**

Section III - Composition

Components (Specific Chemical Identity; Common Name(s))	CAS#: 7732-18-5	% (optional)
Water		> 97

See Certified Weight Report For Other Analytes Present At Trace Quantities.

INTENDED USE: REFERENCE MATERIAL

Section IV. FIRST AID MEASURES

General advice	Consult a physician. Show this safety data sheet to the doctor in attendance. Move to safe area.
If inhaled	If inhaled, move person into fresh air. If not breathing, give artificial respiration. Consult a physician.
In case of skin contact	Wash with soap and water. Consult a physician.
In case of eye contact	Rinse thoroughly with plenty of water for at least 15 minutes and consult a physician.
If swallowed	Do NOT induce vomiting. Rinse mouth with water. Consult a physician.

Section V. FIREFIGHTING MEASURES

Suitable extinguishing media	Use water spray, alcohol-resistant foam, dry chemical or carbon dioxide.
Protective equipment for fire	Wear self contained breathing apparatus for fire fighting if necessary.
Hazardous Decomposition products	Carbon oxides

Section VI. ACCIDENTAL RELEASE MEASURES

Personal precautions	Wear respiratory protection. Avoid breathing vapors, mist or gas. Ensure adequate ventilation. Remove all sources of ignition. Vapours accumulate to form explosive concentrations.
Environmental precautions	Prevent further leakage or spillage if safe to do so. Do not let product enter drains.
Clean up	Contain spillage, and then collect and place in container for disposal according to local regulations (see section 13).

Section VII. HANDLING AND STORAGE

Precautions for safe handling	Avoid contact with skin and eyes. Avoid inhalation of vapour or mist. Use ventilation. Keep away from sources of ignition. No smoking. Prevent the build up of electrostatic charge.
Storage Conditions	Keep container tightly closed in a dry and well-ventilated place. Containers which are opened must be carefully resealed and kept upright to prevent leakage.

Section VIII. EXPOSURE CONTROLS/PERSONAL PROTECTION

Water	CAS#: 7732-18-5	TWA: 500 ppm
Personal protective equipment	Respiratory protection	Handle with gloves. Gloves must be inspected prior to use. Eye protection.
Avoid contact with skin, eyes and clothing. Wash hands thoroughly after handling the product.		

Section IX - PHYSICAL/CHEMICAL CHARACTERISTICS

Boiling Point	100°C	Specific Gravity (H2O = 1)	1
Vapor Pressure (mm Hg)		Melting Point	

Vapor Density (AIR = 1)	NA	Evaporation rate (Butyl Acetate = 1)	0°C
Solubility in Water	Completely miscible		NA
Appearance and Odor	CLEAR, COLORLESS LIQUID WITH SLIGHT CHEMICAL ODOR.		

Section X. STABILITY AND REACTIVITY

Chemical stability	Stable under recommended storage conditions.
Possibility of hazardous reactions	NA
Conditions to avoid	NA
Materials to avoid	NA
Hazardous decomposition products - No data available	

Section XI. TOXICOLOGICAL INFORMATION

LD50 Oral - Rat	NA
LC50 Inhalation - Rat	NA
LD50 Dermal - Guinea pig	NA
Causes skin irritation.	
Eye irritation	

Section XII. ECOLOGICAL INFORMATION

LC50	NA
EC50	NA

Section XIII. DISPOSAL CONSIDERATIONS

Dispose with normal Laboratory Solvent Waste.

Section XIV. TRANSPORT INFORMATION

DOT (US)	IATA
Not dangerous goods	Not dangerous goods
Proper shipping name: Water	Proper shipping name: Water

Section XV. REGULATORY INFORMATION

SARA 302: No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302.

Section XVI. Misc. INFORMATION

The information in this Material Safety Data Sheet meets the requirements of the United States Occupational Safety and Health Act and regulations promulgated thereunder (29 CFR 1910.1200 et. seq.) and Global Harmonized System (GHS). This document is intended only as a guide to the appropriate precautionary handling of the material by trained personnel, or supervised by a person trained in chemical handling. The user is responsible for determining the precautions and dangers of this chemical for his or her particular application. Depending on usage, protective clothing including eye and face guards and respirators must be used to avoid contact with material or breathing chemical vapors/fumes. Exposure to this product may have serious adverse health effects. This chemical may interact with other substances. Since the potential uses are so varied, ABSOLUTE STANDARDS INC. cannot warn of all the potential dangers of use or interaction with other chemicals or substances. ABSOLUTE STANDARDS INC. warrants that the chemical meets the specifications set forth on the label. ABSOLUTE STANDARDS INC. DISCLAIMS ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED WITH REGARD TO THE PRODUCT SUPPLIED HEREUNDER, ITS MERCHANTABILITY OR ITS FITNESS FOR A PARTICULAR APPLICATION. The user should recognize that this product can cause severe injury or death, especially if improperly handled or the known dangers of use are not heeded. READ ALL PRECAUTIONARY INFORMATION. As new documented general safety information becomes available, Absolute Standards Inc. will periodically revise this Material Safety Data Sheet. If you have any questions, please call Technical Service at 1-203-281-2917 for assistance.