Required Airsealing Protocols in Site-Built Homes

Summary

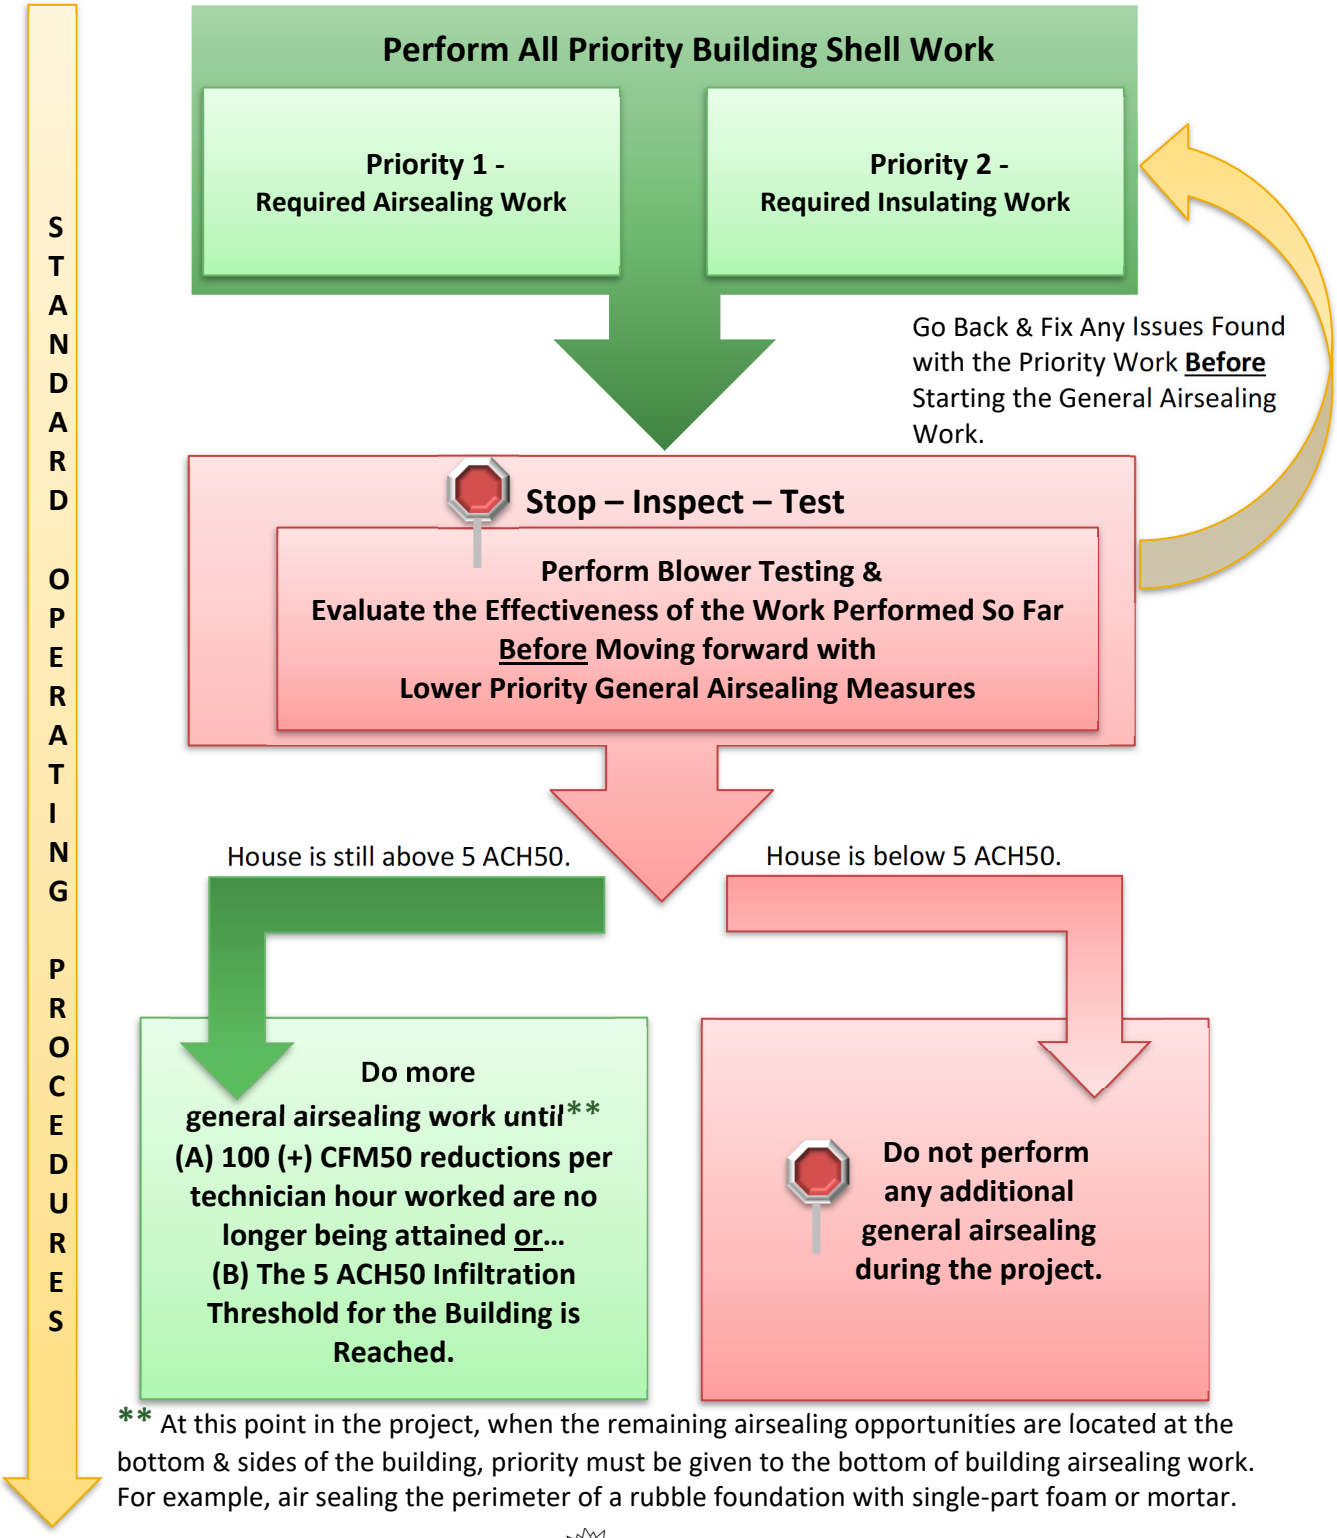

** At this point in the project, when the remaining airsealing opportunities are located at the bottom & sides of the building, priority must be given to the bottom of building airsealing work. For example, air sealing the perimeter of a rubble foundation with single-part foam or mortar.